
ETERNUS vCenter Plug-in Release Note

February 2017

Contents

| | |
|-----------------------------------------------------|----------|
| About this document | 1 |
| Notes for ETERNUS vCenter Plug-in v3.x | 1 |
| Notes for ETERNUS vCenter Plug-in v2.x | 2 |

Trademarks

Microsoft, Windows, Windows Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and other countries. VMware is a registered trademark of VMware, Inc, in the United States and other countries. All other company/product names mentioned herein maybe trademarks or registered trademarks of their respective holders and are used for identification purposes only.

About this document

This document provides complementary information not described on the ETERNUS vCenter Plug-in User's Guide.

Notes for ETERNUS vCenter Plug-in v3.x

1. Support of the VMware vCenter Server 6.5

VMware vCenter Server 6.5 is supported by ETERNUS vCenter Plug-in 3.0.1 or later.

Note following point when installing ETERNUS vCenter Plug-in 3.0.1 (or later) with VMware vCenter Server 6.5.


- After completing installation of the ETERNUS vCenter Plug-in, the [FUJITSU ETERNUS DX] tab might not be displayed or the STXE2006 error might occur when operating vSphere Web Client for the first time.
In this case, restart the "VMware vCenter Configuration Service" service manually.
-

Notes for ETERNUS vCenter Plug-in v2.x

1. Adding Volumes

Newly created volume might not be appeared on the vSphere Web Client even if adding volumes using “LUN Provisioning Wizard” was completed successfully. In this case, the rescan of the storage adapter might have been failed, so please follow steps below:

1. From the vCenter Home screen of vSphere Web Client, select [Inventory List] – [Hosts].
2. From the host list in the left pane, select the host system that uses volume[s] that you have created.
3. Click the [Storage] tab under the management tab, then select [Storage Adapters] menu.
4. Select the adapter that is connected to the ETERNUS hybrid storage system with the target volume then click the icon of the adapter rescan.

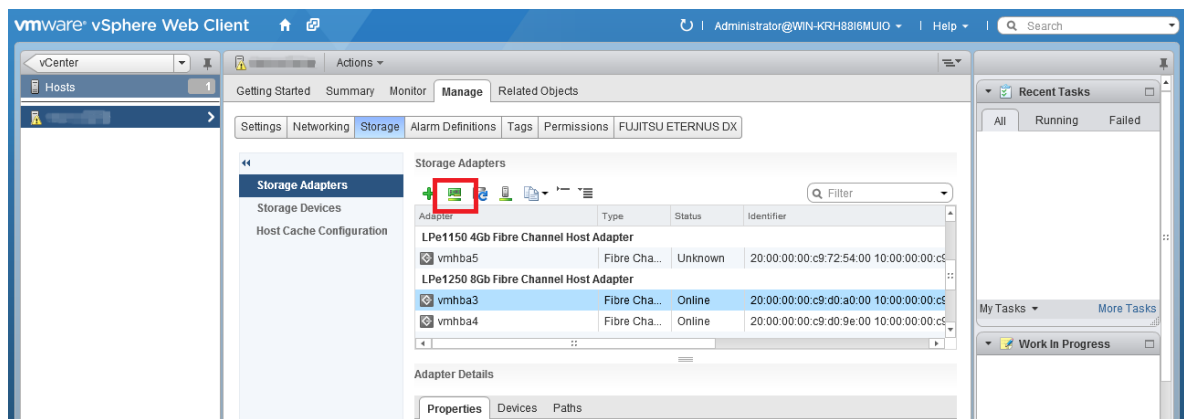

2. Storage Registration issue

Storage Registration feature fails when your environment meets following conditions:

- Using ETERNUS vCenter Plug-in 2.2.0.
- “Storage System Name” is not set on the target ETERNUS hybrid storage system.

In this case, please set “Storage System Name” by using ETERNUS Web GUI, then run Storage Registration feature of ETERNUS vCenter Plug-in again.

This document is devoted to providing technical information. The contents of this document may be modified without any prior notice.
Please contact FUJITSU LIMITED if you find any error in descriptions.

FUJITSU LIMITED is not responsible for indemnity that might be caused by the contents in this documentation or any damage related to contents in this documentation.

FUJITSU LIMITED

<http://www.fujitsu.com/storage/>