

FLASHWAVE® 4100 Extension Shelf AC-Powered Outdoor FAB (Fujitsu Access Business) Cabinet




PC01B-0040-A322


Cabinet Equipped with:

- FLASHWAVE 4100 Extension Shelf
- FLASHWAVE 4100 Extension Shelf fan shelf
- 1 RU Valere® rectifier shelf
- 24-position fiber management tray w/pigtails
- Heat exchanger
- GFCI convenience outlet
- VRLA battery support (heater pad optional)
- Supports dual OC-3 line optics (OC-12 R6.1)
- Supports 28 DS1 drops (pre-wired)
- Supports 3 DS3 drops
- Temperature-hardened 10/100/1000 Ethernet support (R6.1)
- Additional DS1, DS3 & Ethernet growth easily added as needed
- Remote power for NIUs
- Single door with pivoting equipment frame
 - Full front and rear access
- Cabinet dimensions (H x W x D):
 - 39.8 x 25 x 20" (1011 x 635 x 508 mm)
- Cabinet weight:
 - 188 lb (85.3 kg) installation weight
 - 361 lb (163.8 kg) loaded w/cards and batteries
- GR-487-CORE compliant:
 - -40 to +149 °F (-40 to +65 °C)
- H-frame and outdoor wall mountable
- Power requirement:
 - 120 V AC @ 15 amps

Isometric View

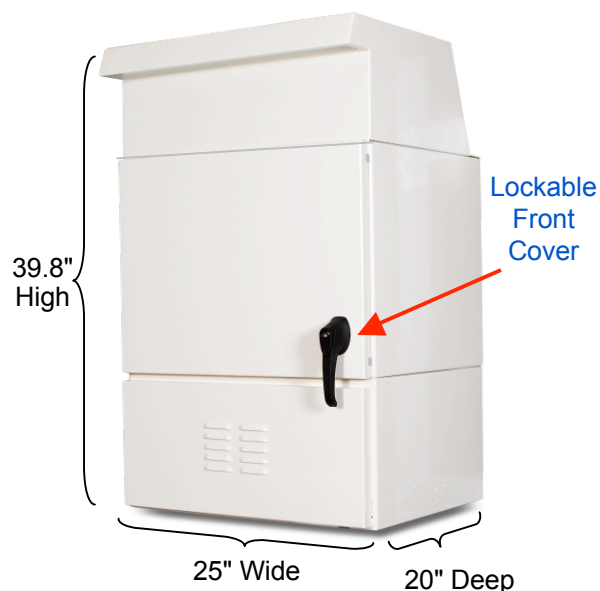


Equipment View

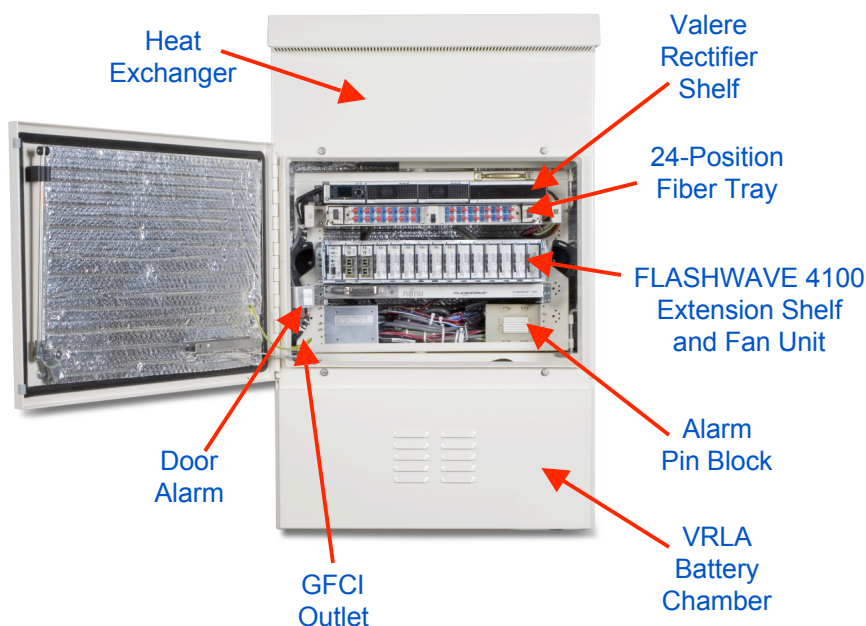

Exterior Views




Interior Frame Pivot Detail

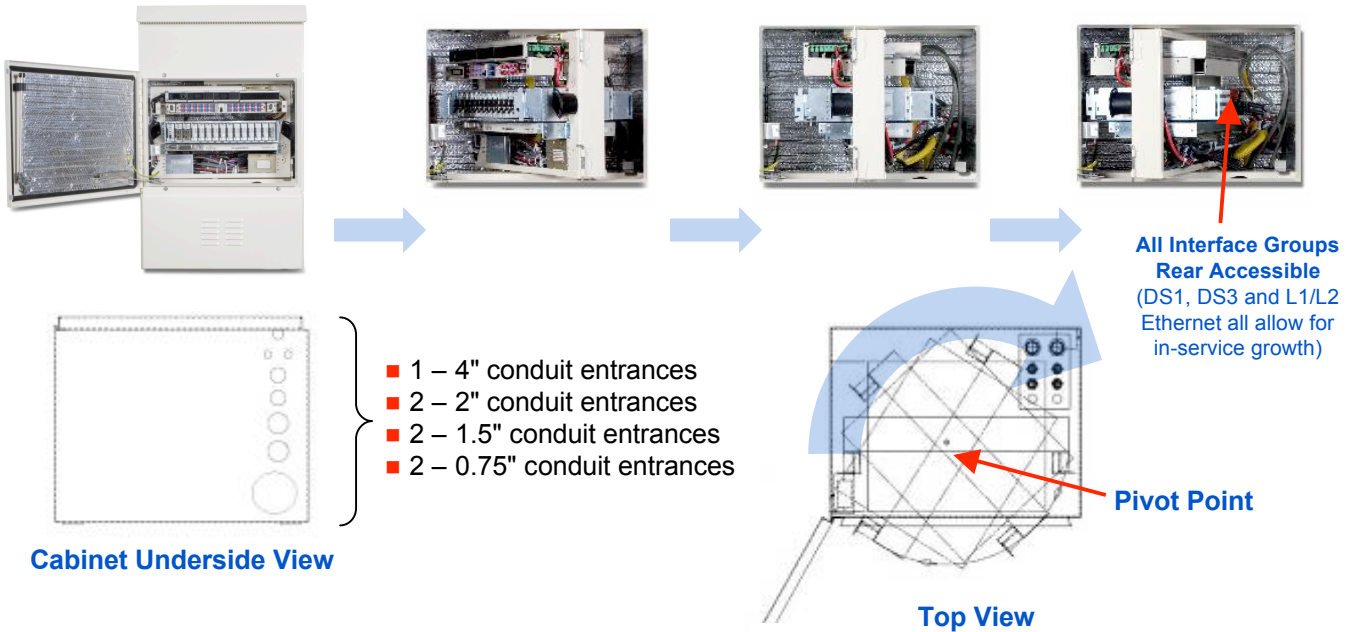

Part Number	Description	Ordering Notes
PC01B-0040-A322	FLASHWAVE 4100 Extension Shelf AC FAB Cabinet	
PC15L-S-C082-08	12 Amp Rectifier Modules (CLEI: PBP3A01AAA)	Two needed
FC9681ECD1-I02	56 DS1 Interface Adapter	One supplied with cabinet
FC9681ECD2-I03	28 DS1; 3 DS3 Interface Adapter	
FC9681ECD3-I03	6 DS3 Interface Adapter	One supplied with cabinet
Recommended: EnerSys™ SBS B14	62 Ah VRLA Battery	Four needed

Application Detail

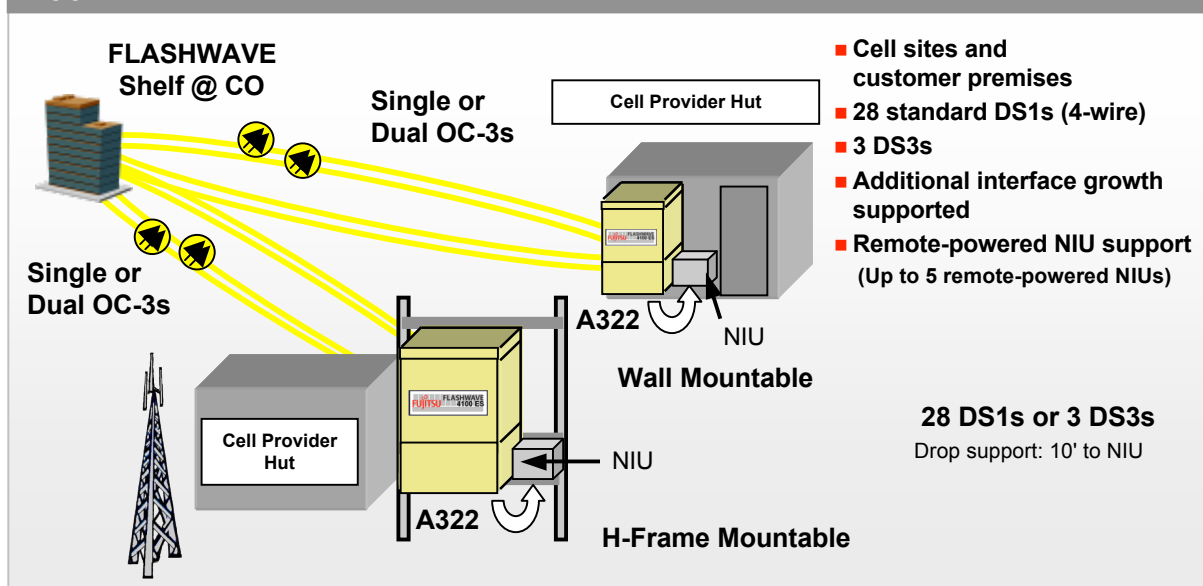

1.1/02.08