

AUTOMOTIVE RELAY

1 POLE – 30A


FTR-G3 Series

RoHS Compliant

■ FEATURES

- Compact for high density packaging
- World smallest in 30A class relays*
- 30A fuse rate
- High contact capacity with proven contact material, minimum 100,000 operations at 14V 30A
- Through hole reflow soldering available (-RW type)
- Plastic sealed

* Internal investigation as of November 2020

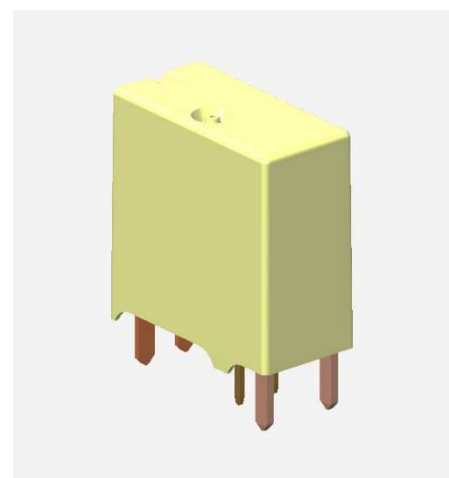

■ APPLICATIONS

Control of power window, power seat, tilt steering, door lock, wiper, sunroof etc.

■ PART NUMBERS

[Example] FTR-G3 C N 012 W1 - RW
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-G3 series
(b)	Contact arrangement	C : 1c (1 Form C)
(c)	Contact gap	N : 0.25 mm
(d)	Nominal coil voltage	012 : 12VDC
(e)	Contact material	W1 : Silver tin oxide indium
(f)	Soldering	RW : Reflow capable (THR) Nil : Flow soldering (reflow is not available)

Note: Actual marking does not carry the type name: "FTR" and option code for reflow capable type.
 E.g.: Ordering code: FTR-G3CN012W1-RW, actual marking: G3CN012W1.

FTR-G3 Series

■ SPECIFICATIONS

Item		Specifications	Remarks / Conditions	
Contact Data	Arrangement	1c (1 form C)		
	Material	Silver tin oxide indium		
	Construction	Single		
	Rating	30A 14VDC	Locked motor load	
	Max. carrying current	40.5A, 30 minute	At 20°C, nominal coil voltage, relay shall be mounted on PCB, double layer PC board, copper foil thickness 4oz. (140μm), copper foil width 3.76 x (1±5%)mm each, copper foil length 50mm±1m	
	Max. inrush current	35A 16VDC	Reference	
	Min. switching load* ¹	1A 12VDC	Reference	
	Voltage drop	Max. 100mV	At 1A 12VDC	
Coil	Rated power consumption	Approx. 640mW	At 20°C	
	Operating temperature range	-40°C to +125°C * ²		
Time	Operate	Max. 10ms	At nominal voltage, without bounce	
	Release	Max. 5ms	At nominal voltage, without bounce, without diode	
Life	Mechanical	Min. 1 x 10 ⁷ operations		
	Electrical	Min. 100 x 10 ⁵ operations	At rated contact rating	
Insulation	Insulation resistance		Min. 100MΩ	At 500VDC initial
	Dielectric withstanding voltage	Open contacts	500VAC (50/60Hz), 1 minute	Initial
		Coil-contact	500VAC (50/60Hz), 1 minute	Initial
Others	Vibration resistance	Misoperation	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration	Direction X, Y, Z, coil ON/OFF total 6 cycles
		Endurance	10 to 200Hz, acceleration 44m/s ² (4.5G) constant acceleration	Direction X, Y, Z, coil OFF total 6 hours
	Shock resistance	Misoperation	100m/s ² (11±1ms)	Direction X, Y, Z, coil ON/OFF total 36 times
		Endurance	1,000m/s ² (6±1ms)	Direction X, Y, Z, coil OFF total 18 times
	Dimensions / Weight		6.6 x 13.7 x 14.0 mm / Approx. 4.0g	

*: Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

2: Relays shall be kept frost-free.

■ Care shall be taken on the heat generated on PC board when maximum carrying current exceed 10A.

FTR-G3 Series

COIL DATA

Coil Code	Rated Coil Voltage (VDC)	Coil Resistance ± 10% (Ω)	Must Operate Voltage* (VDC)	Must Release Voltage* (VDC)
012	12	225	7.3 (at 20°C) 10.4 (at 125°C)	1.0 (at 20°C) 1.5 (at 125°C)




Note: All values in the table are valid at 20°C and zero contact current unless otherwise specified.

Note: Please use at rated coil voltage.


*: Specified operate values are valid for pulse wave voltage.

DIMENSIONS


● Dimensions

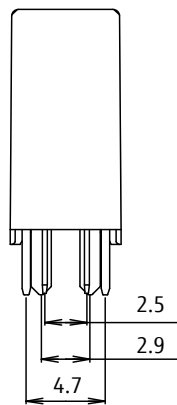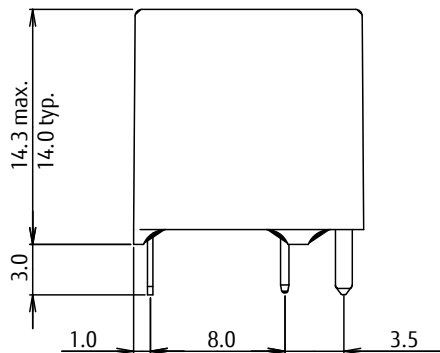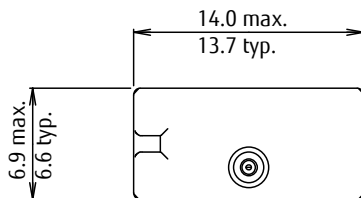

● Schematics (BOTTOM VIEW)

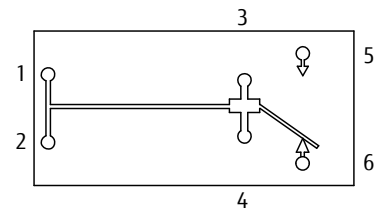

● PC Board Mounting Hole Layout

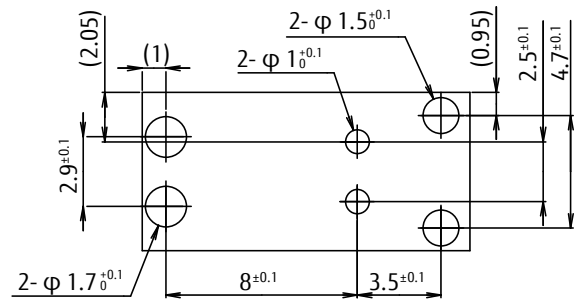

- Dimensions of the terminals do not include thickness of pre-solder.
- Dimensions do not include tolerances.

Unit: mm
(): Reference

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited for flow soldering type.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance


- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:
 Pre-Heating: maximum 120°C within 90 sec.
 Soldering: dip within 5 sec. at 255°C±5°C solder bath
 Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:
 Soldering Iron: 30-60W
 Temperature: maximum 340-360°C
 Duration: maximum 3 sec.

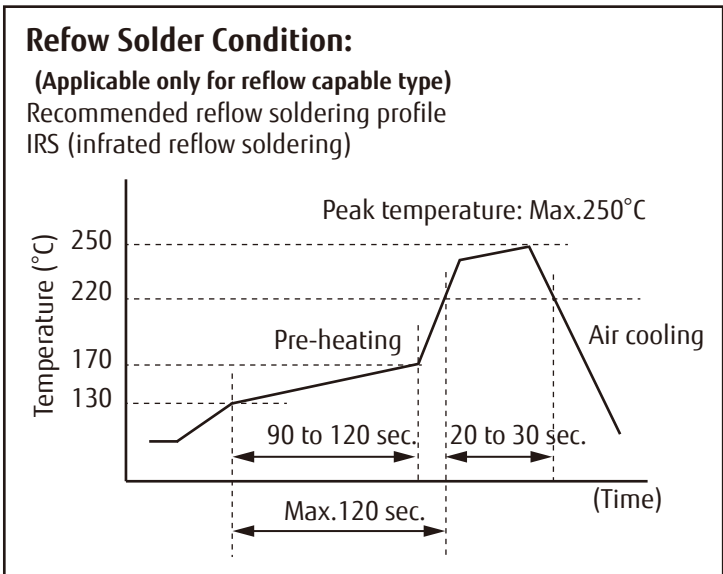

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

<p>Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 19F, 12-4, Higashi-shinagawa 4-chome, Shinagawa-ku, Tokyo, 140-0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/fcl/</p>	<p>Asia Pacific FUJITSU COMPONENTS ASIA, LTD. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex Singapore 118529 Tel: (65) 6375-8560 Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components</p>	<p>Korea FUJITSU COMPONENTS KOREA LIMITED Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82) 31-708-7108 Fax: (82) 31-709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/components/</p>
<p>North and South America FUJITSU COMPONENTS AMERICA, INC 1230 E. Arques Ave. M/S 160 Sunnyvale, CA. 94085, USA Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: us.fujitsu.com/components</p>	<p>China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86-21) 3253 0998 Fax: (86-21) 3253 0997 Email: fcsh@cn.fujitsu.com Web: www.fujitsu.com/cn/products/devices/components/</p>	
<p>Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: www.fujitsu.com/uk/components</p>	<p>Hong Kong FUJITSU COMPONENTS HONG KONG CO., LTD Unit 506, Inter-Continental Plaza No.94 Granville Road, Tsim Sha Tsui, Kowloon, Hong Kong Tel: (852) 2881-8495 Text: (852) 2894-9512 Email: fcal@sg.fujitsu.com Web: www.fujitsu.com/sg/products/devices/components/</p>	

© 2020 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Products are intended for general use, including without limitation, in personal, household and office environments, in buildings and for ordinary use in the industry. Fujitsu Products are not intended to be used in applications where extremely high safety is required ("High Safety Required Applications"), such as, but not limited to, applications in nuclear facilities, in aircraft automatic flight control, in air traffic control, in mass transit system control, in missile launch systems, in weapon systems, in medical equipment for life support or any application involving a direct serious risk of physical injury or death. Please do not use Fujitsu Products without securing the sufficient safety and reliability required for the High Safety Required Applications. In addition, Fujitsu shall not be liable against the customer and/or any third party for any claims or damages arising in connection with the use of Fujitsu Products in the High Safety Required Applications. Fujitsu warrants that its Products, if properly used and serviced, will conform to their specification and will be free from defects in material and workmanship for twelve months from delivery. The implied warranties of merchantability and fitness for a particular purpose and all other warranties, representations and conditions, express or implied by statute, trade usage or otherwise, except as set forth in this warranty, are excluded and shall not apply to the Products delivered.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk. Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date. Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. December 16, 2020