

FUJITSU Component Wireless Modules

Bluetooth® Version 5.0 Dual Mode Module

FWM7BTZ61

Overview


Compact Bluetooth Version 5.0 (dual mode) wireless radio modules compatible with both Bluetooth Low Energy and legacy Bluetooth Classic BR/EDR.



RoHS compliant

Features

- Compatible with both Bluetooth Low Energy and Bluetooth Classic technology**
 It is possible to transfer 2.4GHz ISM band data as Bluetooth version 2.1+EDR/3.0 by using the latest Bluetooth 5.0 certified radio module.
- Saving customers' development resources**
 Bluetooth Classic applications used to manage upper layer protocol stack and profile processing via the host system. This new module has an embedded upper layer protocol stack and profile processing unit that can be directly accessed from a host system with simple text based commands. This saves customers' time to develop complicated protocol stacks or profiles.
- "GATT Direct Access function"**
 This function accesses the GATT profile using simple commands via UART to enable communication with other manufacturers' Bluetooth modules. Bluetooth Low Energy communication uses this GATT profile, including Bluetooth Version 5.0 2Mbps improved speed.
- iOS devices connection**
 It can be connected to the Apple Authentication 3.0 Coprocessor (CP chip) to send and receive data with application software on iOS devices.*

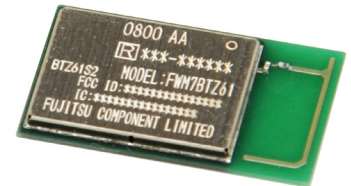


FWM7BTZ61

Note: * The CP chip must be implemented on the customer's equipment. To use the CP chip connection with this Bluetooth module, the customer needs to join the Apple, Inc. MFi License Program.

Applications

A system supporting legacy Bluetooth Classic communication with the latest Bluetooth Version 5.0 technology.

Dimensions

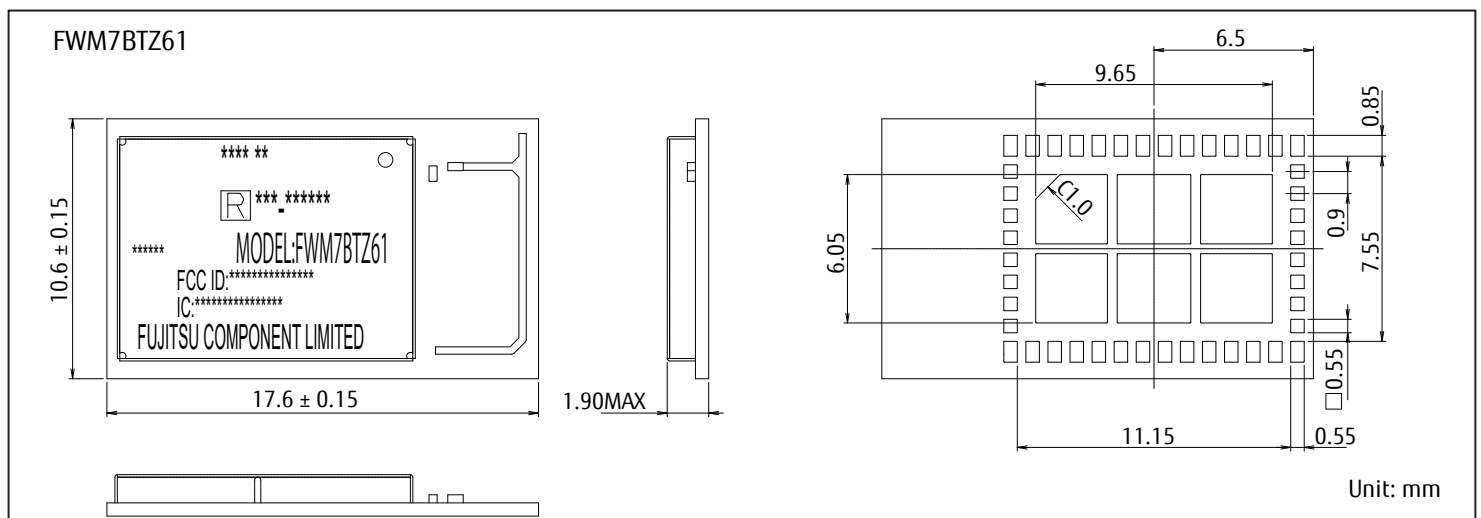

■ Specifications

Item	Specifications	
Part number	FWM7BTZ61-xxxxx	
Bluetooth technology	Conforms to Bluetooth Specification Version 5.0 Technology Dual Mode	
Bluetooth (BR/EDR)	Modulation method	0.5BT Gaussian filter 2FSK Modulation index: 0.28 to 0.35 (Basic rate 1Mbps) $\pi/4$ -DQPSK (EDR 2Mbps) 8DPSK (EDR 3Mbps)
	Symbol rate	1Msps
	Data rate	1Mbps (basic rate), 2Mbps (EDR 2Mbps), 3Mbps (EDR 3Mbps)
	No of channels	79ch
	Channel interval	1MHz
	Output level	Power Class 2
Bluetooth low energy	Modulation method	GFSK
	Symbol rate	1Msps, 2Msps
	Data rate	1Mbps, 2Mbps
	No of channels	40ch
	Channel interval	2MHz
Output level	+4dBm max.	
Antenna	Integrated (Pattern antenna)	
Supporting profile	SPP, iAP2, GATT	
Carrier frequency band	2,400MHz to 2,483.5MHz	
SoC	Cypress CYW20819	
Interface	Hardware	UART
	Software	Fujitsu Component original command system
Crystal resonator	24MHz and 32.768kHz	
Power supply voltage	1.71V to 3.63V	
Operating temperature	-30°C to +85°C	
Dimensions	17.6 x 10.6 x 1.9mm	
Mounting method	Surface mount (SMT)	
Certifications	Bluetooth qualification (QDID)*1, (Scheduled acquisition: FCC, ISED, CE, Radio Act Japan)	

Note: *1: Bluetooth SIG registration is required to use modules QDID

■ Evaluation board

Part number	Details
FWM-FUJ13-E1	Evaluation board (USB cable is attached)
FWM7BTZ61-DAU-E1	Daughter board (FWM7BTZ61 × 1 is mounted)

Note: The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Fujitsu Component is under license. Other trademarks and trade names are those of their respective owners.

Contact

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: (81-3) 3450-1682
Fax: (81-3) 3474-2385
Email: fcl-contact@cs.jp.fujitsu.com
Web: www.fujitsu.com/jp/group/fcl/en/

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fujitsu.com/uk/components/

China

FUJITSU ELECTRONIC COMPONENTS
(SHANGHAI) CO., LTD.
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070, China
Tel: (86 21) 3253 0998 /Fax: (86 21) 3253 0997
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/
components/

Korea

FUJITSU COMPONENTS KOREA, LTD.
Alpha Tower #403,
645 Sampyeong-dong,
Bundang-gu, Seongnam-si,
Gyeonggi-do, 13524 Korea
Tel: (82 31) 708-7108
Fax: (82 31) 709-7108
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/
devices/components/

North and South America

FUJITSU COMPONENTS AMERICA, INC.
1230 E. Arques Ave., M/S 160
Sunnyvale, CA 94085 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: http://us.fujitsu.com/components/

Asia Pacific

FUJITSU COMPONENTS ASIA, Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex,
Singapore 118529
Tel: (65) 6375-8560 / Fax: (65) 6273-3021
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/
components/

Hong Kong

FUJITSU COMPONENTS HONG KONG Co., Ltd.
Room 06, 28/F, Greenfield Tower, Concordia
Plaza, No.1 Science Museum Road,
Tsim Sha Tsui East, Kowloon, Hong Kong
Tel: (852) 2881 8495 Fax: (852) 2894 9512
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/
components/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2020 Fujitsu Components America, Inc. All rights reserved. Revised October 22, 2020.
