

THE POSSIBILITIES ARE INFINITE **FUJITSU**

fi-5000N



WinVista Win Server 2003 Win XP Win 2000 Professional Win Me * Win98SE * Win 98 *

* The fi-5530C2, fi-6240, fi-6140, fi-6230, fi-6130 are supported by Windows® 2000 onwards.



● FUJITSU TWAIN Driver

for Microsoft® Windows®
Operating Systems

QUALITY SCANNER

fi-5000N

TECHNICAL SPECIFICATIONS

The fi-5000N is the world's first PC-less network adapter armed with fingerprint authentication for simple and secure "onetouch" connectability. Used in conjunction with fi-series scanners, the fi-5000N ensures Fujitsu's customers' productivity well into the future.


- Integrates decentralized scanning in existing systems
 - Uses FUJITSU TWAIN/ISIS drivers similar to those installed in fi-series scanners
 - Sends scanned image data over networks like scanners transmit data to PCs
- Simple and secure image transmission
 - Fingerprint authentication technology facilitates simple, error-free image transmissions
- High speed scanning and network data transfer
 - Fast scanning and data transfer achieved with USB 2.0 and 100BASE-TX network interfaces
- Supports all fi-series scanner functions
 - Fully supports auto-de-skew, auto-cropping, multi feed detection, imprinters, image processing and other superior fi-series scanner functions
- Easily maintained with PC administration tools
 - Lists all units linked to a network
 - View and simultaneously change the settings of all units linked to a network
 - Backs up and restores user data

Supported fi-series scanners*1		fi-5530C2, fi-5530C, fi-4530C, fi-6240, fi-6140, fi-6230, fi-6130 fi-5220C, fi-4220C2, fi-4220C, fi-5120C, fi-4120C2, fi-4120C, fi-5110C
LCD display	Type	Monochrome
	Panel size	4 rows of 20 characters (Japanese: 4 rows of 10 characters)
	Language	English, Germany, French, Spanish, Italian, Japanese
Operator panel keys		Total 17 keys: [ID], [SETUP], [ESC], [ENTER], [↑], [↓], [·], Numeric key (0 to 9)
Buzzer		Yes
User Information	User name, send-to PC, PIN	Can be specified by the administrator using PC administration tools
	Fingerprint registration	Can be registered by user using fi-5000N
	Maximum number of users	32
Fingerprint authentication	Fingerprint sensor	Static capacity method / Resolution: 500 dpi
	Finger detection sensor	Yes
	Verification method	Minutiae method
	Verification time	3 seconds or less (Except in the case of extremely dry fingers)
Interface	LAN (Network connection)	IEEE802.3/802.3u compatible 10BASE-T / 100BASE-TX (auto negotiation)
	USB (Scanner connection)	USB 2.0/USB1.1 compatible (USB 2.0/1.1 auto-recognition)
Voltage or voltage range		AC 100V ±10%
Power	LCD on	Less than 8W
	LCD off	Less than 5W
Operating environment	Temperature	5 to 35 °C (42 to 95 °F)
	Relative humidity	20 to 80% (Non-condensing)
Dimensions (WxDxH)*2		127mm x 176mm x 62mm
Weight		1kg
Included drivers		TWAIN / ISIS™
Environmental compatibility*3		RoHS
Included items		AC cable, AC adapter, Setup CD-ROM, Getting Started, Manual Supplement



"One touch" scanning utilizing fingerprint recognition

*1 Does not support ScanSnap line-up products.
Please take note of the following when using the fi-5000N with fi-6240, fi-6140, fi-6230 or fi-6130 scanners:
It is necessary to update firmware for fi-5000N units with A0, A1 and D0 model revision numbers in order to support fi-6240, fi-6140, fi-6230 and fi-6130 scanners.
Refer to the Readme.pdf that has been saved in the setup CD-ROM (inside the fi-5000N folder) that comes included with fi-5000N network adapters.
*2 Projecting items are not included in these dimensions.
*3 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements(2005/95/EC).

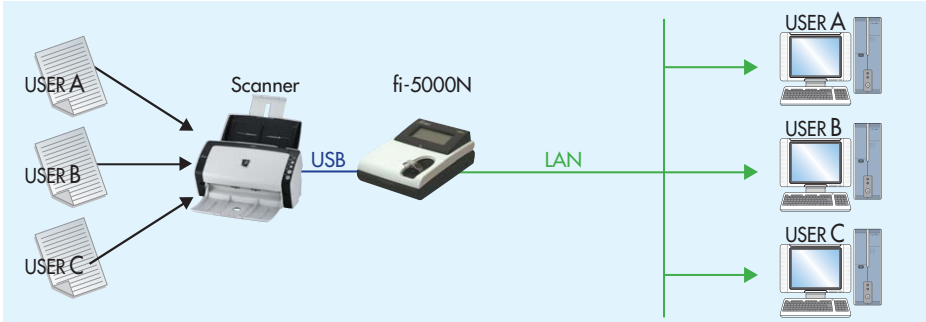

An example of a fi-5000N being used in a system configuration

*Microsoft, Windows and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.
*ISIS is a registered trademark of EMC Corporation of the United States.
*Other product names are the trademarks or registered trademarks of the respective companies.
*Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition June 2007

Japan contact

PFU LIMITED
International Sales Dept., Imaging Business Div.
Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
Kawasaki-city, Kanagawa 212-8563, Japan
Phone: (81-44) 540-4668 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU xxx xxx
xxx xxx xxx xxx
xxx xxx xxx xxx
xxx xxx xxx xxx
xxx xxx xxx xxx
Phone: (1-23) 456-7890 Fax: 123-456
<http://www.xxxx.com/>

