

THE POSSIBILITIES ARE INFINITE **FUJITSU**

A6 COLOR DOCUMENT SCANNER

fi Image Scanner
-60F


A6 Scanner



A6	Flatbed	Auto de-skew	Auto-cropping	COLOR	USB 2.0	Mono. 1 seconds/sheet	Color 1.3 seconds/sheet	600 dpi
-----------	----------------	---------------------	----------------------	--------------	----------------	---------------------------------	-----------------------------------	----------------

Win Vista *	Win XP	Win Server 2003 *	Win 2000 Professional	Win Me	Win 98SE	Win 98
--------------------	---------------	--------------------------	------------------------------	---------------	-----------------	---------------

* Windows Vista™ and Windows Server™ 2003 compatible TWAIN drivers are only available as web downloads.

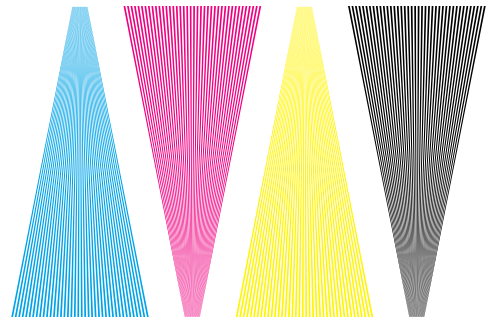

POWERED BY

● FUJITSU TWAIN Driver

for Microsoft® Windows® Operating Systems



QUALITY SCANNER

As an ENERGYSTAR® partner, PFU Limited, a Fujitsu company, has determined that this product meets the ENERGYSTAR® guidelines for energy efficient. ENERGYSTAR® is a registered trademark in the United States.



TECHNICAL SPECIFICATIONS

The fi-60F image scanner's small footprint expands the scanning market. These features will insure Fujitsu's customers' productivity well into the future.

World's fastest A6 scanner

- Only requires 1 second to scan a document in grayscale or monochrome (200dpi)
- Color scans completed in 1.3 seconds (150dpi)

Easy to use

- Auto-de-skew and auto-cropping produce perfect scans every time, even with the cover left open
- USB2.0 and USB1.1 interfaces facilitate easy connectivity

Smallest scanner in its class


- 145 mm (Width) x 234mm (Depth) x 40mm (Height)
- Its lightweight and small size is ideal for front desks, counters and offices
- Perfect for scanning ID cards, passports, etc

Excellent image quality

- 600dpi optical resolution



Original image



Cropped image

Product name	FI-60F	
Scanner type	Flatbed	
Scanning modes	Simplex, Color / Grayscale / Monochrome	
Image sensor type	Color CIS (Contact Image Sensor) (CMOS CIS)	
Light source	R,G,B LED (variable light source)	
Scanning range	Maximum: A6 (148 x 105mm or 5.83 x 4.13in.)	
Scanning speed (A4 portrait)*1	Color	1.3 seconds (150dpi)
	Grayscale / Monochrome	1.0 seconds (200dpi)
Background colors	Black	
Optical resolution	600dpi	
Output resolution	Color (24 bit)	50 to 600dpi (adjustable by 1dpi increments)
	Grayscale (8 bit)	
	Monochrome (1 bit)	
Output format	Color: 24bit, Grayscale: 8bit, Monochrome: 1bit	
AD converter	65,536 levels (16bit)	
Interface	USB 2.0 / USB 1.1	
Connector shape	B type	
Output mode (half-tone)	Dither / Error diffusion	
Voltage or voltage range	AC 100 to 240V, +10% / -10%	
Power	Operating: 8W or less (Sleep mode: Less than 2W)	
Operational environment	Temperature: 5 to 35°C (42 to 95°F)	
	Relative humidity: 20 to 80% (Non-condensing)	
Dimensions: Width x Depth x Height*2	145 x 234 x 40mm (5.7 x 9.2 x 1.6in.)	
Weight	0.9kg (2lb)	
Included drivers	TWAIN, ISIS™	
Environmental compatibility*3	ENERGY STAR® and RoHS	
Others	Document cover	Included (removable)
	Document holding pad color	Black
	Power switch	None (unit switches on and off when linked computer does)
Included items	AC cable, AC adapter, USB cable, Setup CD-ROM, Getting Started, QuickScan Pro brochure	

*1 Actual scanning speeds are affected by data transmission and software processing times.

*2 Projecting items are not included in these dimensions.

*3 Pfu Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2005/95/EC).

Options

Description	Parts number	Comments
Image Processing Software Option V2.5	PA43402-C22901	This image processing software enables the scanner to efficiently binarize scanned data prior to transmission.

*Microsoft, Windows, Windows Server and Windows Vista are registered trademarks of Microsoft Corporation in the United States and/or other countries.

*ISIS is registered trademark of EMC Corporation of the United States.

*Any other products or company names appearing in this document are the trademarks or registered trademarks of the respective companies.

*Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition April 2007.

Japan contact

PFU LIMITED

International Sales Dept., Image Business Division,
Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
Kawasaki-city, Kanagawa 212-8563, Japan
Phone: (81-44) 540-4668 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU x x x x x x x
x x x x x x x x x x x
x x x x x x x x x x x
x x x x x x x x x x x
x x x x x x x x x x x
Phone: (1-23) 456-7890 Fax: 123-456
<http://www.x x x x .com/>

