


# MB87M3550

## The Fujitsu WiMAX 802.16-2004 SoC

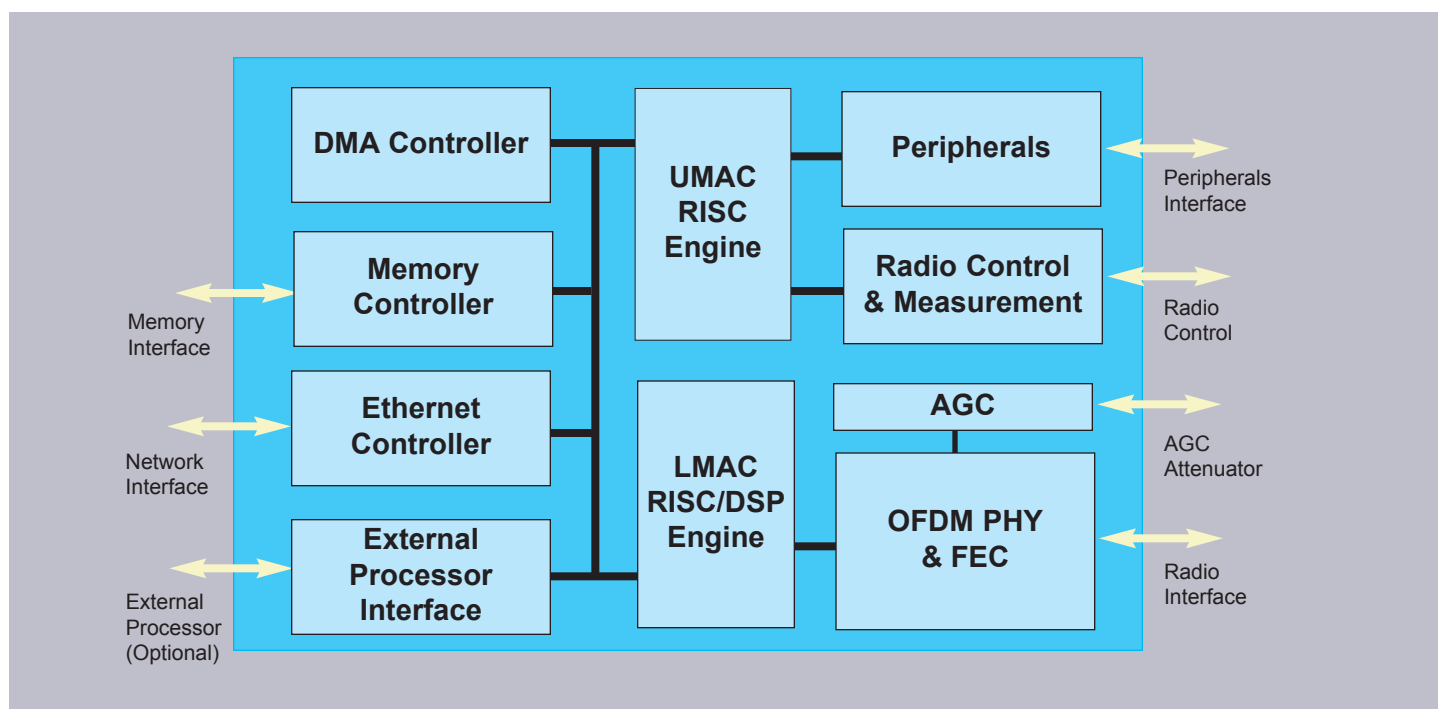

### ► Features

- Fully compliant with IEEE 802.16-2004 standard
- Supports both subscriber station and base station for TDD or FDD applications
- Integrated 256 OFDM PHY with 64QAM, 16QAM, QPSK, and BPSK modulation
- Uplink subchannelization
- Flexible baseband interface with integrated high-performance ADC and DAC
- Automatic Frequency Control (AFC) with integrated DAC
- Dynamic Frequency Selection (DFS) with integrated ADC
- Integrated ADC for transmit and receive power measurements
- Security implementation using DES, AES, CCM encryption/decryption
- Dual RISC processors for implementing upper & lower layer MAC
- Integrated memory controller and DMA controller
- Integrated Ethernet engine for network interface
- Rich set of integrated peripherals and RF control
- Programmable AGC for supporting broad range of RF attenuation

# MB87M3550 The Fujitsu WiMAX 802.16-2004 SoC

## ▶ Applications

- BWA systems compliant with fixed WiMAX specifications
  - Low-cost subscriber stations
  - Enterprise CPEs
  - Base stations
- Two 11GHz licensed and license-exempt bands
- Suitable independent frequency bands at 2.5, 3.5, 3.6 or 5.8GHz
- Half-FDD/Full-FDD or TDD applications

## ▶ Description

Fujitsu has developed a cost-effective, fully integrated MAC and PHY mixed signal baseband processor for Broadband Wireless Access applications. This SoC is designed to support frequencies ranging from 2 to 11GHz in both licensed and license-exempt bands. It supports all available bandwidths from 1.75MHz to 20MHz. The Fujitsu WiMAX SoC is fully compliant with the IEEE 802.16-2004 WiMAX standard and can be configured to be used in both base station and subscriber station applications.

Highly efficient adaptive modulation schemes, including 64QAM, 16QAM, QPSK and BPSK, are supported by this SoC. The SoC's data rate can go up to 75Mbps when applying the 64QAM modulation in a 20MHz channel and using all 192 sub-carriers. Uplink subchannelization is also supported as defined in the standard. Performance enhancement can be realized with the dual RISC engines embedded into the SoC. These two processors not only gracefully handle the essential functions required by the WiMAX specification, but also allow additional headroom to handle user application software.

## ▶ Reference Design

A complete reference design is available and planned to be certified by WiMAX Forum. The system includes all the required software & hardware for a cost-effective system solution. The Fujitsu 802.16 platform enables a BWA platform for subscriber stations or base stations with the following features:

- Compliant with IEEE 802.16-2004 standard specification
- MAC portability to different RTOS
- MAC security sub layer for subscriber station authentication and data encryption
- Multiple Service Class support to differentiate service quality
- Dynamic Service Management to activate the service class when needed

### **Certification and Compliance**

Fujitsu has designed the WiMAX chip to comply with the IEEE 802.16-2004 standard.

## FUJITSU MICROELECTRONICS AMERICA, INC.

Corporate Headquarters

1250 E. Arques Ave. Sunnyvale, CA 94088-3470

Tel: (800) 866-8608 Fax: (408) 737-5999

E-mail: [inquiry@fma.fujitsu.com](mailto:inquiry@fma.fujitsu.com) Web Site: <http://us.fujitsu.com/micro>

©2005 Fujitsu Microelectronics America, Inc.  
All company and product names are trademarks or registered trademarks of their respective owners.  
Printed in the U.S.A. BWA-FS-21190-6/2006