


BGA 256, 320, 352,  
420, 484, 543, 544,  
554, 676  
PBGA 256, 352,  
416, 420, 480, 484,  
496

PKG code	Maximum storage capacity			PKG code	Maximum storage capacity		
	pcs/tray	pcs/inner box	pcs/outer box		pcs/tray	pcs/inner box	pcs/outer box
BGA-256P-M20	40	400	1600	BGA-484P-M07	40	400	1600
BGA-256P-M21	40	400	1600	BGA-484P-M09	40	400	1600
BGA-256P-M22	40	400	1600	BGA-496P-M02	40	400	1600
BGA-256P-M27	40	400	1600	BGA-543P-M01	40	400	1600
BGA-320P-M06	40	400	1600	BGA-544P-M01	40	400	1600
BGA-352P-M36	40	400	1600	BGA-544P-M02	40	400	1600
BGA-352P-M41	40	400	1600	BGA-544P-M04	40	400	1600
BGA-416P-M05	40	400	1600	BGA-554P-M02	40	400	1600
BGA-420P-M21	40	400	1600	BGA-676P-M06	40	400	1600
BGA-420P-M25	40	400	1600	BGA-676P-M07	40	400	1600
BGA-480P-M12	40	400	1600	BGA-676P-M10	40	400	1600
BGA-480P-M13	40	400	1600	BGA-676P-M11	40	400	1600
BGA-480P-M14	40	400	1600				

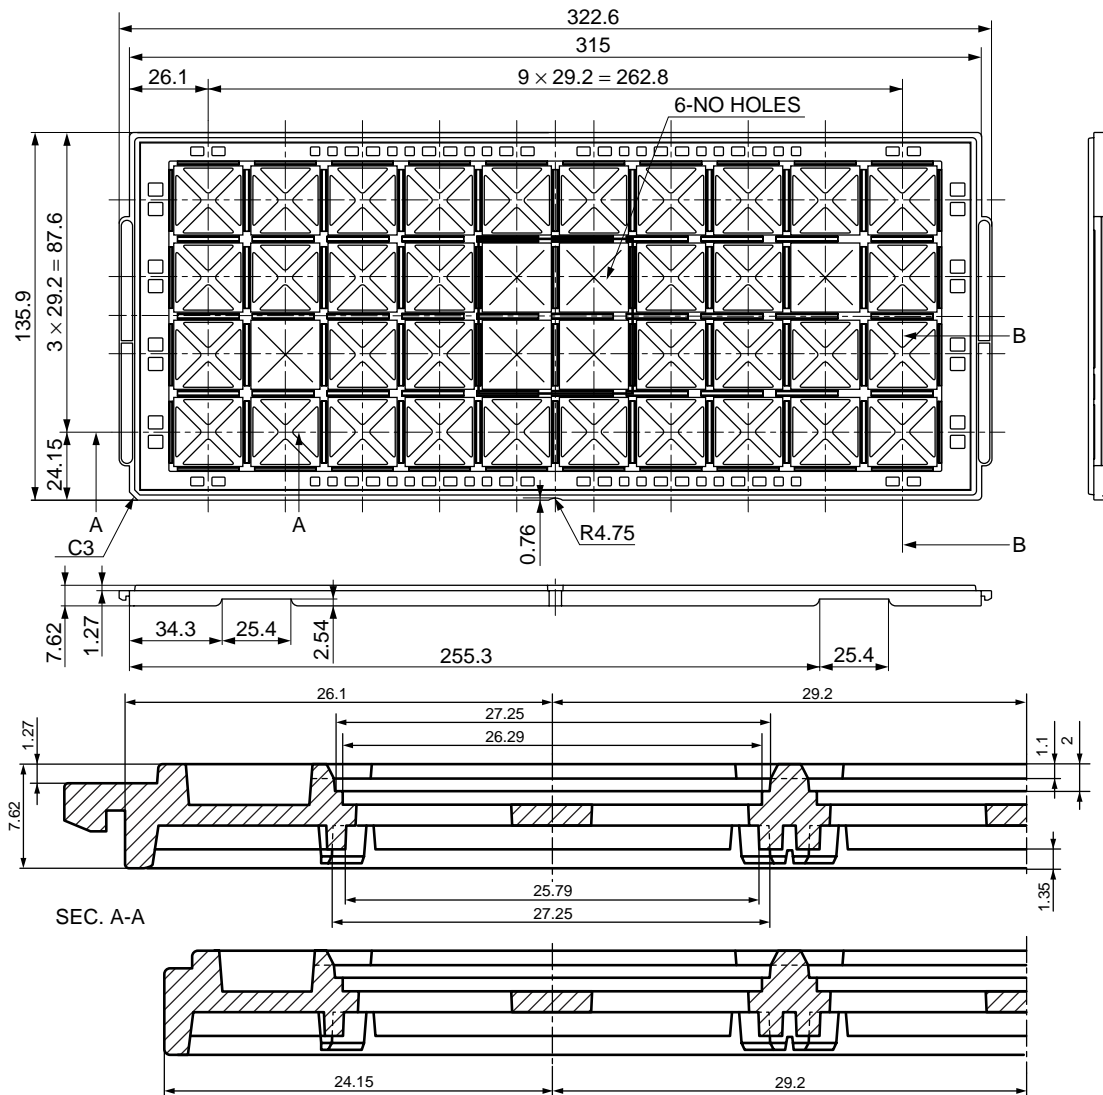


SEC. A-A  
SEC. B-B  
© 2006 FUJITSU LIMITED BGA27x27 : ST-BG272720TJ-1-1-Y-1

(Dimensions in mm)

Material : Conductive polyphenyleneether  
Heat proof temperature : 150 °C Max  
Weight : 90 g

**■ IEC (JEDEC) TRAY Dry Pack Packing Specifications**

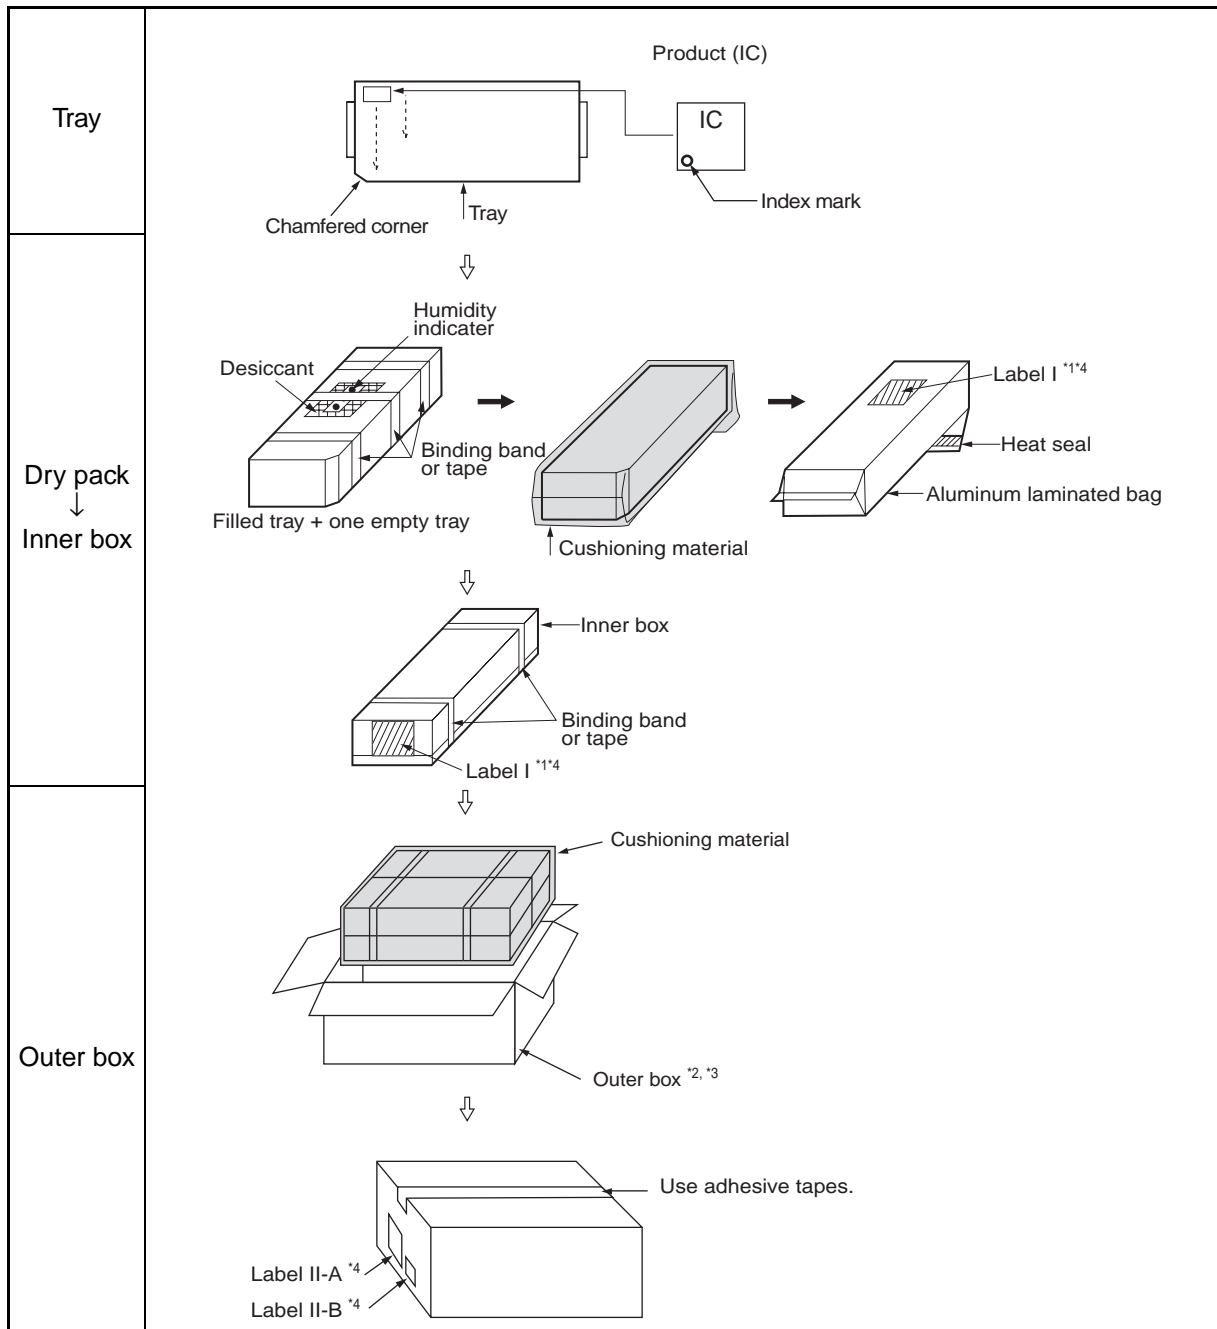

\*1: For a product of witch part number is suffixed with "E1", a " " marks is display to the moisture barrier bag and the inner boxes.

\*2: The size of the outer box may be changed depending on the quantity of inner boxes.



\*3: The space in the outer box will be filled with empty inner boxes, or cushions, etc.

\*4: Please refer to an attached sheet about the indication label.

Note: The packing specifications may not be applied when the product is delivered via a distributor.

■ Product label indicators

**Label I: Label on Inner box/Moisture Barrier Bag/ (It sticks it on the reel for the emboss taping) [C-3 Label (50mm x 100mm)  
Supplemental Label (20mm x 100mm)]**

XXXXXXXXXXXXXXXX (Customer part number or FJ part number)	 	← C-3 Label
(3N)1 XXXXXXXXXXXXXXXX XXX (LEAD FREE mark) (Part number and quantity)	QC PASS	
(3N)2 XXXXXXXXXXXXXXXX XXXXXX (FJ control number)		
XXX pcs (Quantity) XXXXXXXXXXXXXXXX (Customer part number or FJ part number)		
XXXXXXXXXXXXXXXX (Customer part number or FJ part number bar code)		
XXXX/XX/XX (Packed years/month/day) ASSEMBLED IN XXXX		← Perforated line
XXXXXXXXXXXXXXXX (Customer part number or FJ part number) (FJ control number bar code)		← Supplemental Label
XX/XX (Package count) XXXX-XXX XXX	XXXX-XXX XXX	
XXXXXXXXXXXX (FJ control number) (Lot Number and quantity)		
XXXXXXXXXXXXXXXX (Comment)		

**Label II-A: Label on Outer box [D Label] (100mm x 100mm)**

発注者 XXXXXXXXXXXXXXXX (Customer Name) (CUST.)	受注者 (VENDOR) 富士通株式会社	← D Label
受渡場所名 XXXXXXXXXXXXXXXX (Delivery Address) (DELIVERY POINT)	XXX (FJ control number)	
納品キ一番号 XXXXXXXXXXXXXXXX (TRANS.NO.) (FJ control number)	XXX (FJ control number)	
品名コード XXXXXXXXXXXXXXXX (PART NO.) (Customer part number or FJ part number)	XXXXXXXXXXXXXXXXXXXX (Part number)	
品名 (PART NAME) XXXXXXXXXXXXXXXX (Part number)		
入数/納入数量 XXX/XXX (Q'TY/TOTAL Q'TY)	単位 XX (UNIT)	
発注者用備考 (CUSTOMER'S REMARKS) XXXXXXXXXXXXXXXXXXXX	梱包個数 (PACKAGE COUNT) XXX/XXX	
(3N)3 XXXXXXXXXXXXXXXX XXX (FJ control number + Product quantity)	(FJ control number + Product quantity bar code)	
(3N)4 XXXXXXXXXXXXXXXX XXX (Part number + Product quantity)	(Part number + Product quantity bar code)	
(3N)5 XXXXXXXXXXXXXXXX (FJ control number)	(FJ control number bar code)	

**Label II-B: Outer boxes product indicate**

XXXXXXXXXXXXXXXX (Part number)		
(Lot Number)	(Count)	(Quantity)
XXXX-XXX	X 箱	XXX 個
XXXX-XXX	X 箱	XXX 個
	計	XXX 個


\*1: In the case of direct delivery from Fujitsu to customer, the distributor name might be revised with [blank] or [Direct sales].

\*2: Just as \*1, the distributor address might be revised with [blank] or [Fujitsu's].

\*3: Depending on shipment state, "Label II-A" and "Label II-B" on the external boxes might not be printed.

**■ Dimensions for Containers**


**1. Dimensions for inner box**

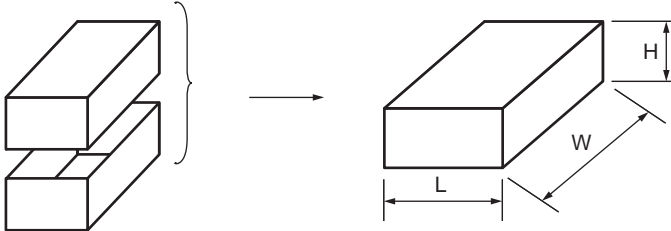

L	W	H
165	360	75

(Dimensions in mm)

**2. Dimensions for outer box**

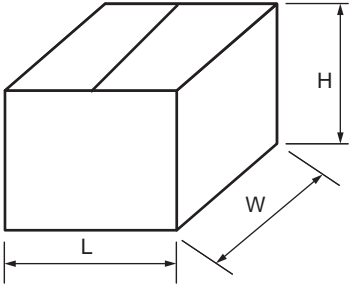

L	W	H
355	385	195

(Dimensions in mm)