


TeamPOS 2000

Summary:

The following is the installation procedure for the video driver in Windows 98SE.


A. Procedure for Installing the Windows 98SE video driver in Single Display Mode

1. Establish a directory on the hard drive (example: C:\video), transfer the file into it and un-zip the file using WinZip. Select [Start], then [Settings], then [Control Panel] and double click on [Display]. Select [Settings] and then click on [Advanced]. Select [Adapter] and a VGA property window will open. Click on [Change] then [Next] and then select [Display a list], click [Next], then [Have Disk], then [Browse] and the below window will open.

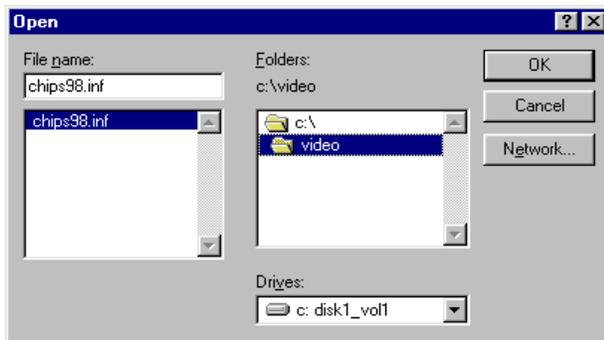


2. Find the directory containing the video files (example: c:\video), click [OK] and then [OK] again. A window titled Select Device will open, select [Chips and Technologies 69030 AGP/PCI], click [OK] then [Next], then [Finish], then [Apply], and finally [Close]. A window will open asking “Do you want to restart your computer now?” Click [Yes].

3. After the computer restarts, go back into the Display Properties [Settings] tab and set the display resolution and color depth per the picture below.

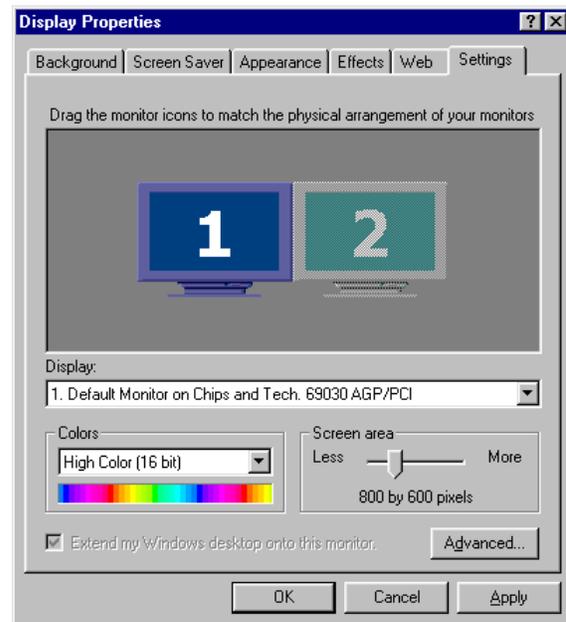

TeamPOS 2000

4. Lastly under the [Settings] tab in Display Properties ensure the #1 monitor is highlighted and then go into the [Advanced] Tab and click the [Chips] tab. Change the setting under Display Device to CRT or LCD dependent on which device is being used for viewing. Click [Apply] and then [OK] four times.

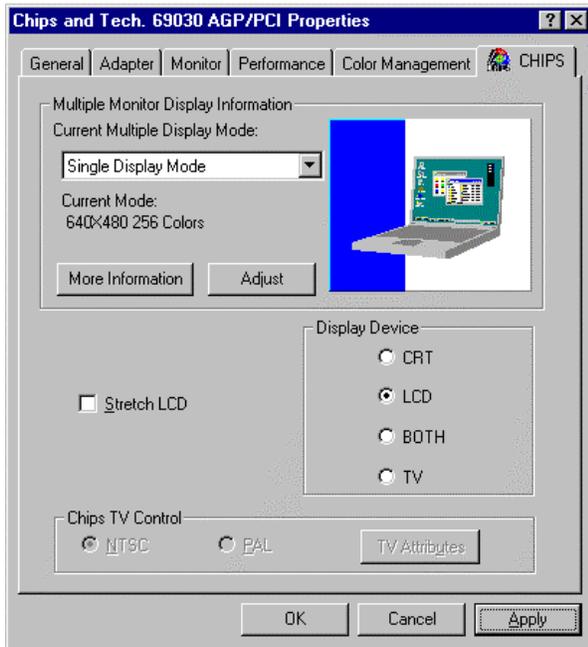


TeamPOS 2000

B. Procedure for Installing the Windows 98SE video driver in Single Display Dual Timing Mode.

Note: In this mode the information on both screens will be the same.

1. Perform procedure A steps 1-4 . Then in the Display Properties option ensure the number one monitor is highlighted and select [Advanced] and then the [CHIPS] tab. On the drop down menu select [Single Display Dual Timing Mode] then click [Apply] , and [OK] four times. Finally if need be set the color palette and resolution per step 3 of procedure A.

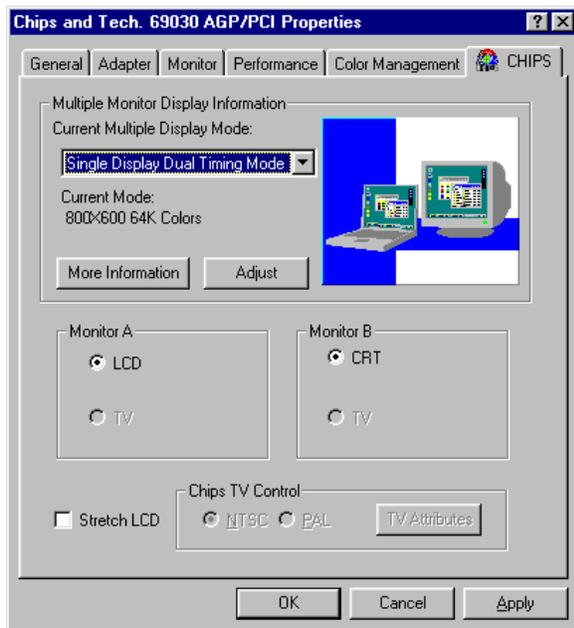


TeamPOS 2000


C. Procedure for Installing the Windows 98SE video driver in Dual Display Mode.

Note: In this mode the information on the display can be separated to run two separate channels.

1. Perform procedure A steps 1-4 . Ensure in the [Chips] tabs screen under Display Device, Both is not selected. Then in the Display Properties option select the [Settings] tab. Click on the #2 monitor. A message will display asking, “Do you want to enable this monitor?” Click [Yes]. Click [Apply] and then [OK].

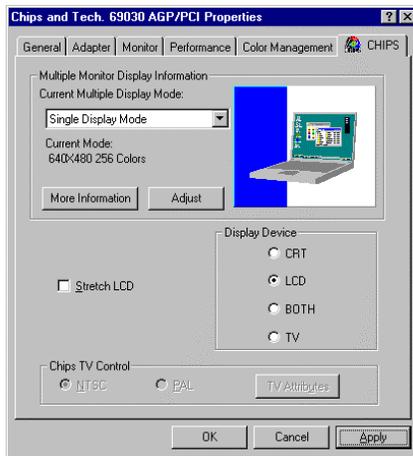

3. By default the LCD is the primary display device and the CRT is the secondary. Switching the selections will cause the CRT to become the primary display device and the LCD the secondary.

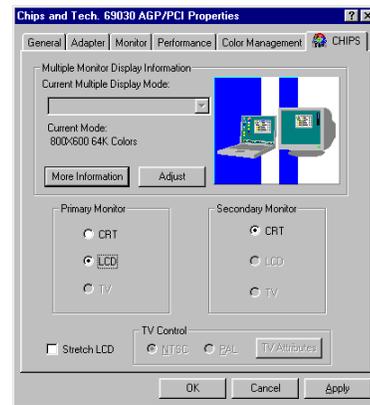

2. To change the screen resolution and color palette, go into the Display Properties [Setting] tab and set it per the picture below. The resolution for both monitors should be set to 800x600 while the color depth set to 16 Bit.

