

The Fujitsu F50

Currency/Media Dispensing Unit

Single Cassette Dispenser



to the OEM sales channel to meet the needs of a greater number of applications.

The Fujitsu Model F50 media dispenser offers tremendous features at a very low price point — all without any sacrifice of quality or reliability. Compact in size, but packed with functionality, the F50 will drive down your production costs and decrease the total cost of ownership for your customers through higher reliability and reduced maintenance.

High-end Features Without High Cost. The F50 offers many features usually found only on more expensive units. For example, double-pick detection ensures proper media dispensing, and advanced onboard and remote diagnostics provide the ability to detect sensor problems before actual failure. Best of all, the F50 is a solid, rugged, industrial grade unit that will last.

The F50 also provides you with maximum flexibility in product design. It can be installed in either a wide-and-shallow or a narrow-and-deep profile by using the available front or side delivery tray. The adjustable storage bin can be used for a variety of media sizes enabling you to use the same dispenser for domestic or international currency.


Products Your Customers Really Need. Small footprint, high-end features, reliability, low maintenance — now you have the opportunity to get an advanced, flexible media dispenser at an entry-level price and better satisfy the cost-of-ownership requirements of your customers.



Now There's Fujitsu. With over 30 years of experience in designing and building media dispensing devices of legendary quality, Fujitsu has expanded its family of products available

For more information contact Randy Fox, Director of OEM Products, at 858-731-4588. E-mail: rfox@ftxs.fujitsu.com

F50 Single Cassette Dispenser

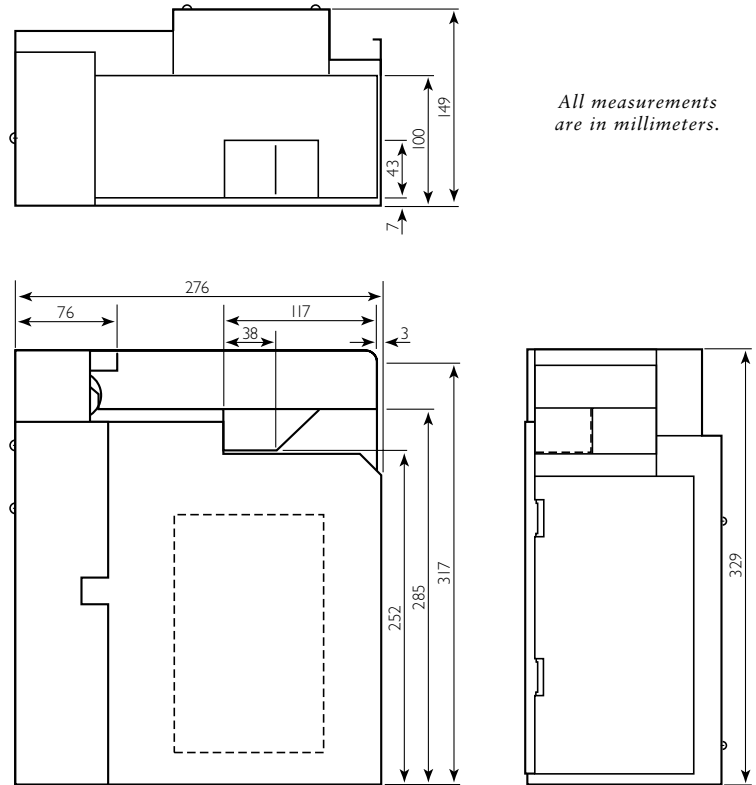

SPECIFICATIONS

Dimensions (W x D x H)	276 x 149 x 329 mm		(1-Denomination)	Accommodation 150 mm
Weight (w/o media)	7 kg		Capacities/Denomination	New US Note 1,200 (Approx.)
Service Access	Front or Side		Reject Bin	Integrated
# of Cassettes	Integrated - 1 Denomination		Reject Bill Area Capacity	Approx 20 Bills
Bill Count Speed	1.5 Bills/Second		Bill Low Sensor	None
Media Spec.	Dimension	Max 82 x 165 mm Min 65 x 130 mm	Interface	RS232C
	Thickness	0.07 ~ 0.15 mm		
Bills/Transaction	99 Bills/Transaction		Electrical Power Requirements	DC+ 24 V± 10% Max: 4A Ave: 2A DC + 5 V± 5% 1A
Bill Retrieval	None		Temperature	Operation 0 ~ 32° C Stop State -5 ~ 50° C
			Relative Humidity	Operation 10 ~ 85% Stop State 8 ~ 95%



For further information contact:
FUJITSU TRANSACTION SOLUTIONS INC.
 2801 Network Boulevard
 Frisco, Texas 75034
 Phone: 800-340-4425
 www.ftxs.fujitsu.com

Registered trademarks and trademarks are the property of their respective owners. Specifications subject to change without notice. Fujitsu endeavors to ensure that the information in this document is correct and fairly stated, but does not accept liability for any error or omissions. The development of Fujitsu products and services is continuous, and published information may not be up to date. It is important to check the current position with Fujitsu.