

fi-60F Image Scanner

A6 COLOR DOCUMENT SCANNER


A6 Scanner



A6	Flatbed	Auto de-skew	Auto-cropping	COLOR	USB 2.0	Color 1.3 <small>seconds/sheet</small>	Mono. 1 <small>second/sheet</small>	600 dpi
-----------	----------------	---------------------	----------------------	--------------	----------------	--	---	----------------

Win 7 *	WinVista	Win Server 2003/2008 *	Win XP	Win 2000 Professional
----------------	-----------------	-------------------------------	---------------	------------------------------

* Windows® 7 and Windows Server™ 2003/2008 compatible TWAIN/ISIS drivers are available as web downloads.
* For the latest driver support for your operating system, please visit the fi-series Web site.

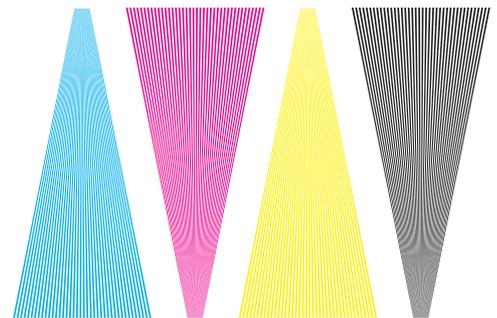

POWERED BY

PFU Limited, a Fujitsu company, has determined that this product meets the ENERGYSTAR® guidelines for energy efficient. ENERGYSTAR® is a registered trademark in the United States.

for Microsoft® Windows® Operating Systems

QUALITY SCANNER



TECHNICAL SPECIFICATIONS

New and improved features


The fi-60F image scanner's small footprint expands the scanning market. These features will insure Fujitsu's customers' productivity well into the future.

- **World's fastest A6 scanner**
 - Only requires 1 second to scan a document in grayscale or monochrome (200dpi)
 - Color scans completed in 1.3 seconds (150dpi)
- **Easy to use**
 - Auto-de-skew and Auto-cropping produce perfect scans every time, even with the cover left open
 - USB2.0 and USB1.1 interfaces facilitate easy connectivity
- **Smallest scanner in its class**
 - 145mm (Width) x 234mm (Depth) x 40mm (Height)
 - Its lightweight and small size is ideal for front desks, counters and offices
 - Perfect for scanning ID cards, passports, etc
- **Excellent image quality**
 - 600dpi optical resolution
- **Easy to use**
 - Bundled with ScandAll PRO Lite software.



Product name	FI-60F	
Scanner type	Flatbed	
Scanning modes	Simplex, Color / Grayscale / Monochrome	
Image sensor type	Color CIS (Contact Image Sensor) (CMOS CIS)	
Light source	R,G,B LED (variable light source)	
Document size	Maximum: A6 (105 x 148mm)	
Scanning speed*1 (A4 Portrait)	Color	1.3 seconds (150dpi)
	Grayscale	1.0 seconds (200dpi)
	Monochrome	
Expected daily volume	100 times/day	
Background colors	Black	
Optical resolution	600dpi	
Output resolution	Color (24bit)	50 to 600dpi (adjustable by 1dpi increments)
	Grayscale (8bit)	
	Monochrome (1bit)	
Output format	Color: 24bit, Grayscale: 8bit, Monochrome: 1bit	
AD converter	65,536 levels (16bit)	
Interface	USB2.0 / USB1.1	
Connector shape	B type	
Image processing function	Dither / Error diffusion	
Power requirements	AC 100 to 240V ±10%	
Power consumption	Operating: 8W or less (Sleep mode: Less than 2W)	
Operational environment	Temperature: 5 to 35°C (42 to 95°F)	
	Relative humidity: 20 to 80% (Non-condensing)	
Dimensions: Width x Depth x Height*2	145 x 234 x 40mm (5.7 x 9.2 x 1.6in.)	
Weight	0.9kg (2lb)	
Included software / drivers	TWAIN, ISIS™, ScandAll PRO Lite	
Environmental compliance	ENERGY STAR® and RoHS*3	
Others	Document cover	Included (removable)
	Document holding pad color	Black
	Power switch	None (unit switches on and off when linked computer does)
Included items	AC cable, AC adapter, USB cable, Setup CD-ROM, Getting Started, QuickScan™ Pro brochure	

*1 Actual scanning speeds are affected by data transmission and software processing times.
 *2 Projecting items are not included in these dimensions.
 *3 PFU Limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

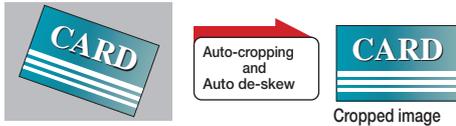

Original image

Options

Description	Parts number	Comments
Image Processing Software Option V2.5	PA43402-C22901	This image processing software enables the scanner to efficiently binarize scanned data prior to transmission.

Trademarks

- *Microsoft, Windows, Windows Server and Windows Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- *ISIS is a registered trademark of EMC Corporation in the United States.
- *Other company names and product names are the trademarks or registered trademarks of the respective companies.

⚠ Safety Precautions

- Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.
- Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to this product.
- Be sure to limit the use of this product to listed power ratings.

Visit the fi-Series web site for ordering and purchasing information <http://imagescanner.fujitsu.com>

Japan contact

PFU LIMITED
 International Sales Dept., Imaging Business Div.
 Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
 Kawasaki-city, Kanagawa 212-8563, Japan
 Phone: (81-44) 540-4668 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU x x x x x x x
 x x x x x x x x x x x x
 x x x x x x x x x x x x
 x x x x x x x x x x x x
 Phone: (1-23) 456-7890 Fax: 123-456
<http://www.x x x x .com/>

Please note that the scanning and printing of paper currency as well as stock and bond certificates is illegal. Specifications are subject to change without notice.