


The Fujitsu G60

Powerful Multi-Cassette Media Recycling Module

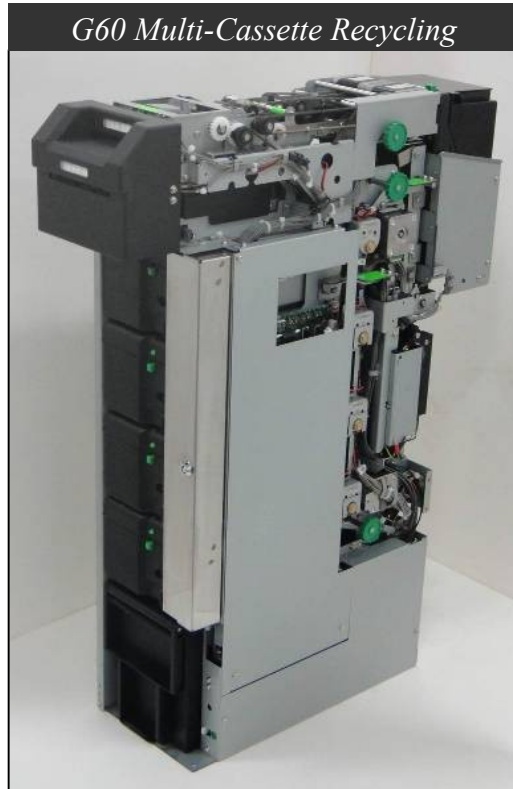

Now There's Fujitsu.

With over 30 years of experience in designing and building media dispensing devices of legendary quality, Fujitsu has expanded the family of products available to its OEM sales channel to meet the needs of a greater number of applications.

Fujitsu for you.


Bill Recycling Module is backed by Fujitsu's team of experienced, dedicated professionals who are committed to bringing you the devices you need to create solutions that will help your customers succeed. Tell us about your unique OEM requirements and make Fujitsu a part of your team.

Main features:

- **High reliability**
 - Advanced technology and quality for banknote validation like ATM
 - 4 recycling cassettes can be configured flexibly to store up to 4 denominations.
 - High-speed note transaction in a bunch
- **Easy operability**
 - Enables to insert and return mixed denominations at a time
 - Reduces operations to collect and replenish banknotes by replacing cassettes
 - User display illuminates banknote slot. (Option)
- **Easy maintenance**
 - Easy to remove jammed banknotes by accessing all the transport paths

FUJITSU FRONTECH LIMITED


shaping tomorrow with you

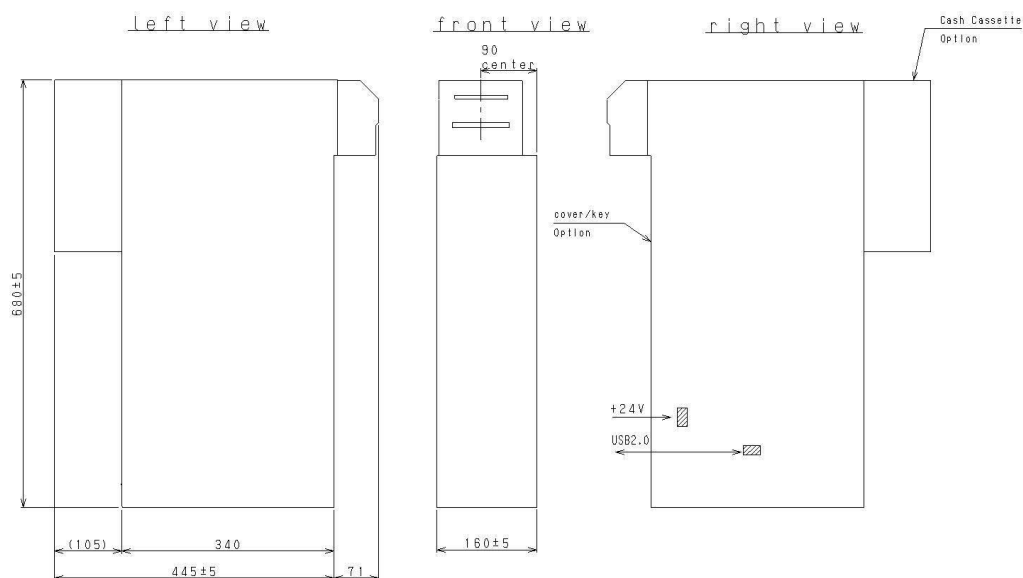

SPECIFICATIONS

Dimensions (W x D x H)	160mm x 340mm x 680mm
Weight (W/O Bills)	Approx. 25kg
Service Access	Front or Rear access
Bills Transaction (deposit)	20 Bills
Bills Transaction (dispense)	20 Bills
Recycle Stacker capacity	100 Bill (Approx.) × 4 Stackers
Cash Cassette capacity (Option)	500 Bills (Approx.)
Cash Box capacity	1000 Bills (Approx.)
Acceptable Media Range	
Maximum (mm)	Max. 83mm × 177mm (T.B.D.)
Minimum (mm)	Min. 60mm × 120mm
Thickness (mm)	0.09 ~ 0.20
Processing performance	Deposit 1 Bill / 1.5 sec 20 Bills / 10 sec Dispense 1 Bill / 2.0 sec 20 Bills / 12 sec
Interface Specification	USB 2.0 Full Speed CEN / XFS
Electrical Power Requirements	DC + 24V ± 10% MAX 15A
Temperature	Operation 0~40°C Stop State -5~50°C
Relative Humidity	Operation 10~85% Stop State 8~95%
RoHS-compliant unit	Yes

(* Above specifications may be changed without prior notice.)



FUJITSU FRONTECH LIMITED

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <http://www.frontech.fujitsu.com/en/>

Inquiry: <http://www.frontech.fujitsu.com/en/contact/>

All rights reserved Copyright© FUJITSU FRONTECH LIMITED 2010

January 2011 FTGB-03-009-EN01