

COMPACT POWER RELAY (automotive applications) 1 POLE - 6A (For 24V car battery)

FTR-P3 Series

■ FEATURES

- Compact for high density packaging.
- High contact capacity with proven contact material.
(100,000 operations, 28V, 6A)
- Coil power saving
(900mW nominal achieved with state-of-the-art magnetic design)
- Ease of PCB layout
(all terminals on perimeter, coil and contact terminals separated)
- Over-voltage circuit breaking capability with 0.6mm gap.
- Packaging for auto-insertion.
- Application examples: lamp (LED)
- Reflowable & high stand-off
- RoHS compliant



■ Part Numbers

[Example] FTR-P3 C P 024 W1 - 06
 (a) (b) (c) (d) (e) (f)

(a)	Relay type	FTR-P3	: FTR-P3-Series
(b)	Contact configuration	C	: 1 form C
(c)	Contact gap	P	: 0.6mm gap
(d)	Coil rated voltage	024	: 24VDC Coil rating table at page 3
(e)	Contact material	W1	: Silver oxide tin-indium
(f)	Special type	06	: High stand-off (Reflowable type)

Actual marking does not carry the type name: "FTR -06"
 E.g.: Ordering code: "FTR-P3CP024W1-06", actual marking: "P3CP024W1"

■ Specification

Item			Characteristics	Remarks / conditions
Contact data	Configuration		1 form C (SPDT)	
	Material		Silver oxide tin-indium	
	Contact path voltage drop		Max. 100mV	At 1A/12VDC
	Contact rating		6A at 28VDC	Resistive load
	Max. carrying current ^{*1}		20A/ 1 hour ^{*3}	25°C, at rated coil voltage
	Max. switching voltage		28VDC	Reference
	Max. switching current		6A (resistive load) ^{*2}	Reference
	Min. switching load ^{*2}		6VDC, 1A	Reference
Coil data	Operating ambient temperature range		40°C ~ +125°C	No frost
	Storage temperature range		40°C ~ +125°C	No frost
Timing data	Operate		Max. 10ms	At nominal voltage, without bounce
	Release		Max. 5ms max. (without bounce, no diode) Max. 15ms max. (without bounce, with diode)	At nominal voltage
Life	Mechanical		Min. 1 x 10 ⁶ operations	
	Electrical		Min. 100 x 10 ³ operations	6A at 28VDC (resistive load)
Insulation	Resistance (initial)		100MΩ min. (at 500VDC)	
	Dielectric withstanding voltage (initial)		500VAC (50/60Hz, 1min.)	
Other	Vibration resistance	Misoperation	10 to 200Hz, acceleration 43m/s ² (4.4G) constant acceleration	
		Endurance	10 to 200Hz, acceleration 43m/s ² (4.4G) constant acceleration	
	Shock resistance	Misoperation	Min. 100m/s ² (11 ± 1ms)	
		Endurance	Min. 1,000m/s ² (6 ± 1ms)	
	Weight		Approx. 5g	

^{*1}: Need to consider the heat from PCB when max. current is more than 10A.

^{*2}: Minimum switching loads and maximum switching current mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

^{*3}: Switching during 20A conduction may cause breaking failure.

■ Coil Data


Coil code	Rated Coil Voltage	Coil Resistance +/-10%	Must Operate Voltage*	Must Release Voltage*	Power Consumption
	(VDC)	(Ω)	(VDC)	(VDC)	(W)
024	24	640	14.4	1.9	0.9

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise stated.

* Specified operate vallues are valid for pulse wave voltage.

■ Characteristic Data (Reference)


* Characteristic data is not a guaranteed value, but measured values of samples from production line.

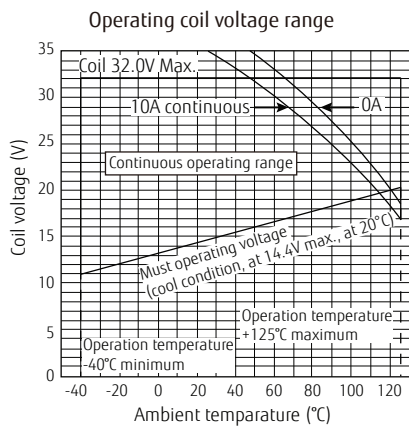

Note: Coil temperature shall not exceed 155°C


■ Dimensions

- Dimensions

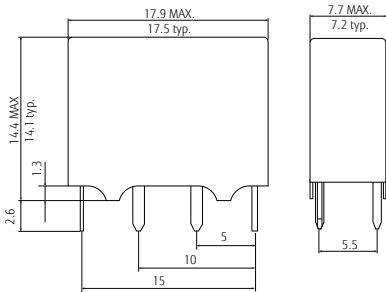


- * Dimensions of the terminals do not include thickness of pre-solder.
- * Dimensions do not include tolerances. Please ask specification in case you need tolerances.

- Schematics
(BOTTOM VIEW)

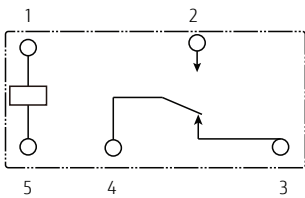

- PC Board Mounting Hole Layout
(BOTTOM VIEW)

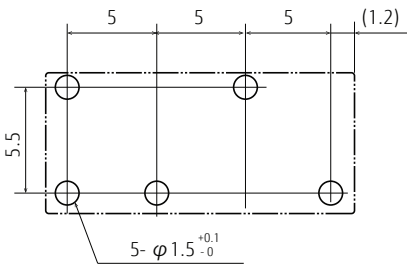

(): Reference value
Unit: mm

- * Tolerance of PC board mounting hole layout : ±0.1 unless otherwise specified.

Cautions

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU including amendments.
- Use of Cadmium in electrical contacts is exempted as per Annex III of the RoHS directive 2011/65/EU. Please consider expiry date of exemption. Relays with Cadmium containing contacts are not to be used for new designs.
- All relays are lead-free. Please refer to Lead-Free Status Info for older date codes at:
<http://www.fujitsu.com/downloads/MICRO/fcai/relays/lead-free-letter.pdf>
- Characteristic data is not guaranteed values, but measured values of samples from production line.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at
255°C ± 5°C solder bath


Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 350-360°C

Duration: maximum 3 sec.

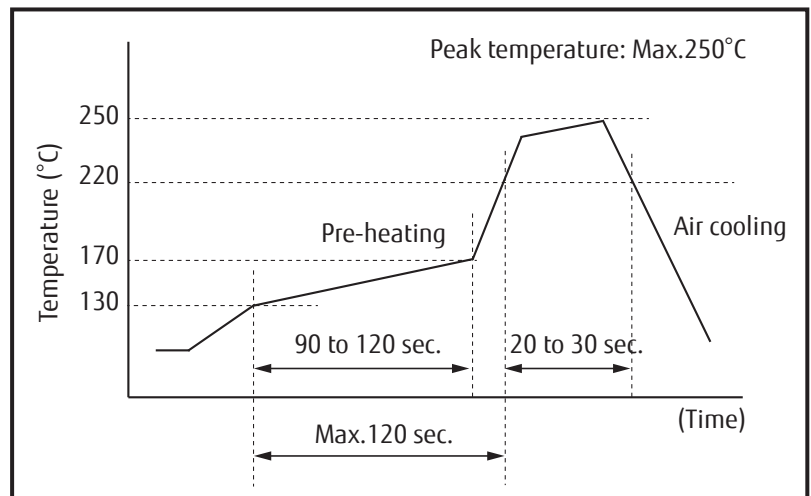

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower 19F,
12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,
Tokyo, 140-0002, Japan
Tel: (81-3) 3450-1682
Fax: (81-3) 3474-2385
Email: fcl-contact@cs.jp.fujitsu.com
Web: www.fujitsu.com/jp/fcl/

North and South America

FUJITSU COMPONENTS AMERICA, INC
2290 North First Street, Suite 212
San Jose, CA 95131, USA
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: us.fujitsu.com/components

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fujitsu.com/uk/components

Asia Pacific

FUJITSU COMPONENTS ASIA, LTD.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components

China

FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070,
China
Tel: (86-21) 3253 0998
Fax: (86-21) 3253 0997
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components

Hong Kong

FUJITSU COMPONENTS HONG KONG CO., LTD
Unit 506, Inter-Continental Plaza
No.94 Granville Road, Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: (852) 2881-8495
Tex: (852) 2894-9512
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components/

Korea

FUJITSU COMPONENTS KOREA LIMITED
Alpha Tower #403, 645 Sampyeong-dong,
Bundang-gu, Seongnam-si, Gyeonggi-do,
13524 Korea
Tel: (82) 31-708-7108
Fax: (82) 31-709-7108
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/components/

©2018 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. September 26, 2018