

SOLID STATE RELAY


MAXIMUM LOAD CURRENT 1.5 A / 2A SE SERIES

RoHS compliant



■ FEATURES

- Conforms to UL, CSA standards
- Ultra slim and light weight, SIL terminals type
 - Size: 5.0 (W) × 20.0 (L) × 17.0 (H)mm
 - Weight: approximately 4.0 g
- High reliability, long life and maintenance free
- High isolation (between input and output)
 - Dielectric strength: 2,500 Vrms
- Internal zero cross circuit type available
- RoHS compliant since date code: 6522 (May 22nd, 2006)
Please see page 5 for more information

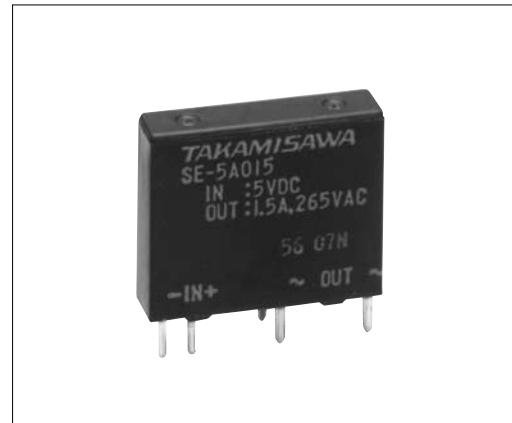

■ ORDERING INFORMATION

[Example] $\frac{SE}{(a)}$ - $\frac{12}{(b)}$ $\frac{A}{(c)}$ $\frac{02}{(d)}$ $\frac{V}{(e)}$ $\frac{F}{(f)}$

(a)	Series Name	SE : SE Series
(b)	Nominal Voltage (Input side)	3: 3 VDC 5: 5 VDC 12: 12 VDC 24: 24 VDC
(c)	Load Voltage	A : AC type
(d)	Load Current	015 : 1.5 A 02 : 2.0 A
(e)	Output Protection	Nil: No varistor V : Varistor type (2.0A type only)
(f)	Zero Cross Circuit	F: No zero cross type C: Zero cross type


■ SPECIFICATIONS

Item		AC 1.5 A		AC 2.0 A		Remarks
		no zero cross	zero cross	no zero cross	zero cross	
INPUT side	Nominal Voltage (DC)	3 V, 5 V, 12 V, 24 V				
	Operate Range	±20% of nominal voltage				
	Must Operate Voltage	80% of nominal voltage				
	Must Release Voltage	Minimum 1 VDC				
	Input Impedance	3 VDC Type	130Ω	180Ω	130Ω	180Ω
5 VDC Type		330Ω	470Ω	330Ω	470Ω	±10%
12 VDC Type		1.0 kΩ	1.5 kΩ	1.0 kΩ	1.5 kΩ	±10%
24 VDC Type		2.2 kΩ	3.0 kΩ	2.2 kΩ	3.0 kΩ	±10%
OUTPUT side	Load Voltage Range	AC 24 to 265V rms				
	Maximum Load Current	1.5 Arms		2.0 Arms		see CHARACTERISTIC DATA
	Minimum Load Current	10 mArms				
	1 Cycle Surge Current	50 A (60 Hz 1 cycle)				
	Max. Off-State Leakage Current	0.5 mA rms		1.0 mA rms		(at 100 V rms 60 Hz)
		1.0 mA rms		2.0 mA rms		(at 200 V rms 60 Hz)
Max. On-State Voltage Drop	1.2 V rms		1.3 V rms		at maximum load current	
Maximum Operate Time	1 ms	1/2 cycle + max.1 ms	1 ms	1/2 cycle + max.1 ms		
Maximum Release Time	1/2 cycle + 1ms max.					
Operating Temperature Range	-30°C to + 85°C					
Storage Temperature Range	-40°C to +100°C					
Case Color	Black					
Weight	Approximately 3.5 g		5.1 g			

■ INSULATION

Item	AC 1.5A type	AC 2.0A type	Note
Resistance (initial)	Minimum 1,000 MΩ (500VDC)		Input - Output
Surge Voltage	2,500V rms 1min.		


■ BLOCK DIAGRAM

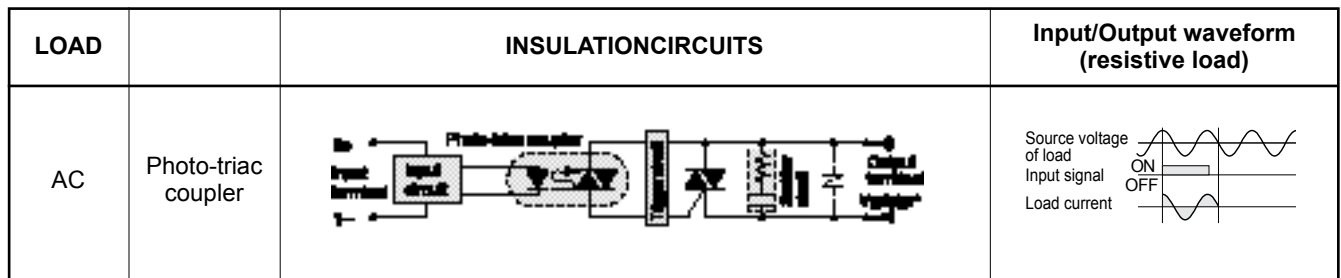


*: only 2A type had varistor

■ CHARACTERISTIC DATA







SE-()A015 type (1.5 A type)

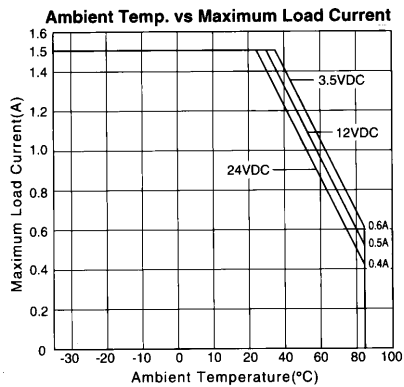

SE-()A02 type (2.0A type)

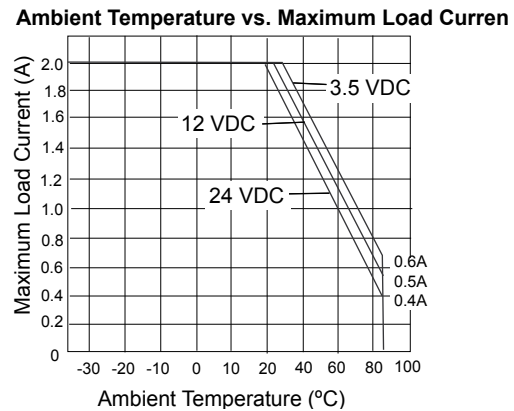

■ REFERENCE DATA

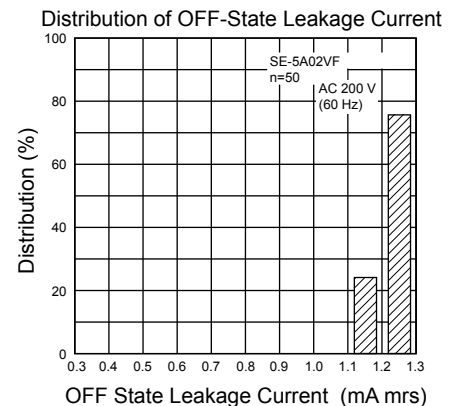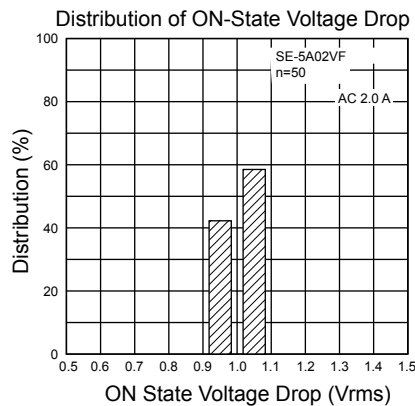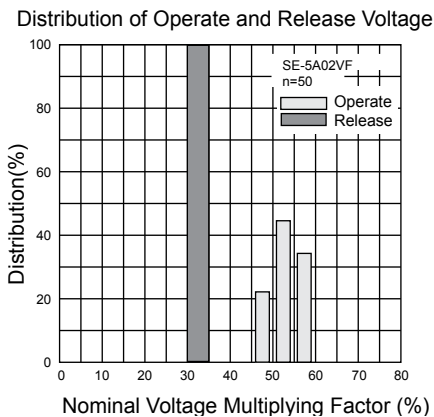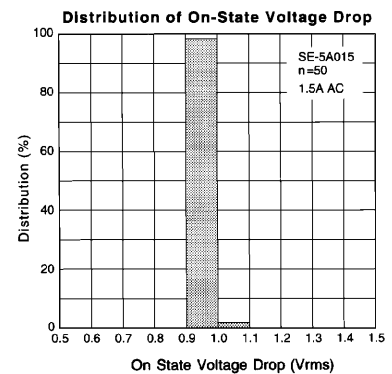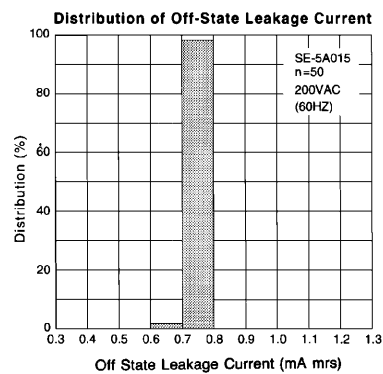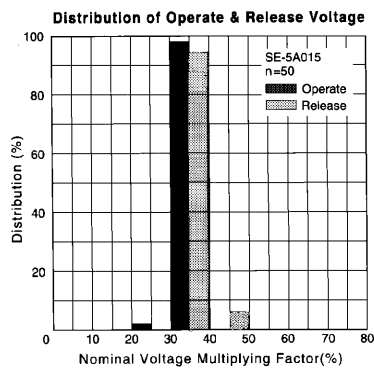


SE SERIES


■ DIMENSIONS

● Dimensions


SE- () A015 type

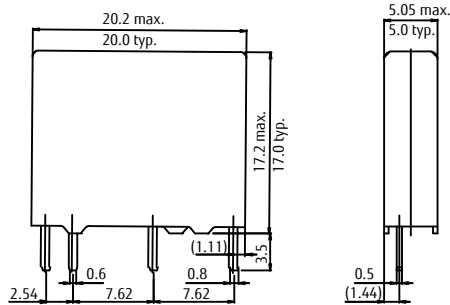

● Schematics (BOTTOM VIEW)






● PC board mounting hole layout (BOTTOM VIEW)




Unit: mm

SE- () A02 type

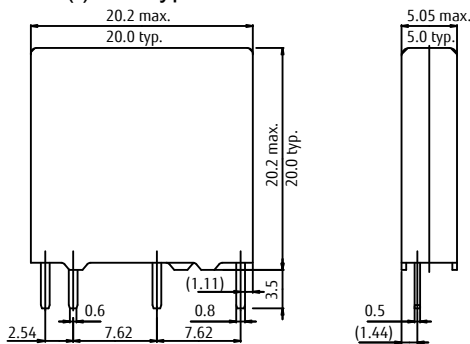

■ NOTES

When large noise and surge are impressed on the load side, there is the possibility of the occurrence of malfunction or damage. In such a case, a varistor should be inserted in the circuit.

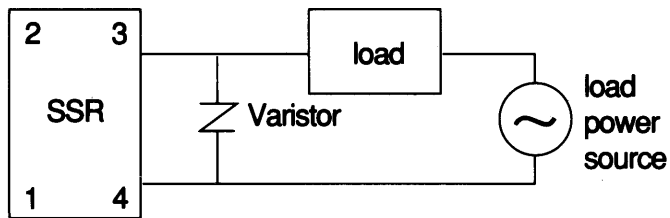

CAUTIONS

- All values mentioned in this datasheet are provided under ideal conditions. Please perform the confirmation test before actual use.
- Reflow soldering is prohibited.
- Do not use relays in the atmosphere with sulfide gas, chloride gas or nitric oxide. Contact resistance may increase.
- Do not use silicon or silicon-containing product or materials near relays. It may cause contact failure.

GENERAL INFORMATION

1. ROHS Compliance

- All relays produced by Fujitsu Components are compliant with RoHS directive 2011/65/EU, including commission delegated directive 2015/863.

2. Recommended lead free solder condition

- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.
- Recommended solder for assembly: Sn-3.0Ag-0.5Cu.

Flow Solder Condition:

Pre-Heating: maximum 120°C
within 90 sec.

Soldering: dip within 5 sec. at 255°C±5°C solder bath

Relay must be cooled by air immediately after soldering

Solder by Soldering Iron:

Soldering Iron: 30-60W

Temperature: maximum 340-360°C

Duration: maximum 3 sec.

We highly recommend that you confirm your actual solder conditions

3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to electromechanical relays, unless otherwise indicated.

4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

Fujitsu Components International Headquarter Offices

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower 19F,
12-4, Higashi-shinagawa 4-chome, Shinagawa-ku,
Tokyo, 140-0002, Japan
Tel: (81-3) 3450-1682
Fax: (81-3) 3474-2385
Email: fcl-contact@cs.jp.fujitsu.com
Web: www.fujitsu.com/jp/fcl/

North and South America

FUJITSU COMPONENTS AMERICA, INC
1230 E. Arques Ave. M/S 160
Sunnyvale, CA. 94085, USA
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: us.fujitsu.com/components

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: www.fujitsu.com/uk/components

Asia Pacific

FUJITSU COMPONENTS ASIA, LTD.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex
Singapore 118529
Tel: (65) 6375-8560
Fax: (65) 6273-3021
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components

China

FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD.
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070,
China
Tel: (86-21) 3253 0998
Fax: (86-21) 3253 0997
Email: fcsh@cn.fujitsu.com
Web: www.fujitsu.com/cn/products/devices/components/

Hong Kong

FUJITSU COMPONENTS HONG KONG CO., LTD
Unit 506, Inter-Continental Plaza
No.94 Granville Road, Tsim Sha Tsui, Kowloon,
Hong Kong
Tel: (852) 2881-8495
Tex: (852) 2894-9512
Email: fcal@sg.fujitsu.com
Web: www.fujitsu.com/sg/products/devices/components/

Korea

FUJITSU COMPONENTS KOREA LIMITED
Alpha Tower #403, 645 Sampyeong-dong,
Bundang-gu, Seongnam-si, Gyeonggi-do,
13524 Korea
Tel: (82) 31-708-7108
Fax: (82) 31-709-7108
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/devices/components/

© 2020 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes. The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. September 25, 2020