


# POWER RELAY

## 1 POLE—3A to 5 A (CADMIUM FREE CONTACTS TYPE)

### VG SERIES

#### ■ FEATURES

- UL, CSA recognized, TV-5 rated
- 1 form A (SPST-NO) or 1 form C (SPDT) contact
- Reliable low power consumption miniature power relay  
—Sustained voltage: 200 V
- Slim type meets high density mounting requirement
- Easy circuit design with completely separated terminal arrangement (coil and contact terminals)
- Plastic sealed type back filled with nitrogen available
- Environmentally friendly cadmium free contact type is available



#### ■ ORDERING INFORMATION

[Example]  $\frac{VG}{(a)}$  -  $\frac{12}{(*)}$   $\frac{H}{(b)}$   $\frac{M}{(c)}$   $\frac{S}{(d)}$   $\frac{E}{(e)}$  -  $\frac{K}{(f)}$  -  $\frac{UL}{(g)}$

(a)	Series Name	VG: VG Series
(b)	Nominal Voltage	Refer to the COIL DATA CHART
(c)	Contact Rating	Nil : 3 A H : 5 A T : 5 A (only TV-5)
(d)	Contact Arrangement	Nil : 1 form C (SPDT) M : 1 form A (SPST-NO)
(e)	Coil Type	Nil : Standard type S : High sensitivity type (only 3 A type available)
(f)	Contact Material (Rating)	Nil : Gold overlay silver-nickel (3 A, 5 A) Nil : Silver alloy (only TV-5) E : Silver-nickel (3 A, 5 A)
(g)	Enclosure	Nil : Flux free type C : Plastic sealed type (with tape) K : Plastic sealed type
(h)	Standard	UL: UL, CSA approved type

Note: Actual marking omits the hyphen (-) of (\*)

# VG SERIES

## ■ SAFETY STANDARD AND FILE NUMBERS

UL508, 873 (File No. E56140)

C22.2 No. 1, No. 14 (File No. LR35579)

Please note that UL/CSA ratings may differ from the standard ratings.

	Type	Nominal voltage	Contact rating
TV-Rating	VG-TM	5 to 48 VDC	TV-5 120 VAC 1/8 HP 120 VAC/240 VAC 5 A 24 VDC/240 VAC resistive (*) Pilot duty C 150
General	VG-H	5 to 48 VDC	1/8 HP 120 VAC/240 VAC 5 A 24 VDC/120 VAC resistive Pilot duty C 150
	VG	5 to 48 VDC	1/10 HP 120 VAC/240 VAC 3 A 30 VDC/120 VAC resistive Pilot duty D 150

\* Only UL approval

## ■ SPECIFICATIONS

Item		Standard Type			High Sensitive Type
		TV-5 Type	5 A Type	3 A Type	3 A Type
		VG-( ) TM	VG-( ) H VG-( ) HE	VG VG-E	VG-S VG-SE
Contact	Arrangement	1 form A (SPST-NO)		1 form A (SPST-NO) or 1 form C (SPDT)	
	Material	Silver alloy		Gold overlay silver alloy (VG-H, VG), silver alloy (VG-HE, E)	
	Style	Single			
	Resistance (initial) (at 1 A 6 VDC)	Maximum 200 mΩ	Maximum 70 mΩ (VG-H, VG), Max. 100 mΩ (VG-HE, E)		
	Rating (resistive)	5 A 120 VAC 5 A 24 VDC		3 A 120 VAC 3 A 30 VDC	
	Maximum Carrying Current	5 A			
	Maximum Switching Power	1,000 VA, 150 W		500 VA, 90 W	
	Maximum Switching Voltage	250 VAC, 150 VDC			
	Maximum Switching Current	5 A		3 A	
	Minimum Switching Load*1	10 mA 5 VDC (VG-H, VG), 100 mA 5 VDC (VG-TM, VG-HE, E)			
	Coil	Nominal Power (at 20°C)	0.36 to 0.4 W		
Operate Power (at 20°C)		0.18 to 0.2 W			0.102 to 0.13 W
Operating Temperature		-40°C to +70°C (no frost)			-40°C to +85°C (no frost)
Time Value	Operate (at nominal voltage)	Maximum 10 ms			
	Release (at nominal voltage)	Maximum 5 ms			
Insulation	Resistance (at 500 VDC)	Minimum 1,000 MΩ			
	Dielectric Strength	between open contacts	900 VAC 1 minute	750 VAC 1 minute	
		between coil and contacts	4,000 VAC 1 minute		
	Surge Strength	7,000 V (at 1.2 × 50 μs)			
Life	Mechanical	1 × 10 <sup>7</sup> operations minimum			
	Electrical	1 × 10 <sup>5</sup> operations minimum (at contact rating)			
Other	Vibration Resistance	Misoperation	10 to 55 Hz (double amplitude of 1.5 mm)		
		Endurance	10 to 55 Hz (double amplitude of 1.5 mm)		
	Shock Resistance	Misoperation	100 m/s <sup>2</sup> (11 ±1 ms)		
		Endurance	1,000 m/s <sup>2</sup> (6 ±1 ms)		
	Weight	Approximately 12 g			

\*1 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with the actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.







# VG SERIES

## COIL DATA CHART



	MODEL			Nominal voltage	Coil resistance ( $\pm 10\%$ )	Must operate voltage	Must release voltage	Nominal power
	TV	Standard Type						
	5 A Type	5 A Type	3 A Type					
Standard Type	VG- 5TM	VG- 5H (M) (E)	VG- 5 (M) (E)	5 VDC	69 $\Omega$	35 VDC	0.25 VDC	360 mW
	VG- 6TM	VG- 6H (M) (E)	VG- 6 (M) (E)	6 VDC	100 $\Omega$	4.2 VDC	0.3 VDC	360 mW
	VG- 9TM	VG- 9H (M) (E)	VG- 9 (M) (E)	9 VDC	225 $\Omega$	6.3 VDC	0.45 VDC	360 mW
	VG-12TM	VG-12H (M) (E)	VG-12 (M) (E)	12 VDC	400 $\Omega$	8.4 VDC	0.6 VDC	360 mW
	VG-18TM	VG-18H (M) (E)	VG-18 (M) (E)	18 VDC	870 $\Omega$	12.6 VDC	0.9 VDC	380 mW
	VG-24TM	VG-24H (M) (E)	VG-24 (M) (E)	24 VDC	1,450 $\Omega$	16.8 VDC	1.2 VDC	400 mW
	VG-48TM	VG-48H (M) (E)	VG-48 (M) (E)	48 VDC	6,000 $\Omega$	33.6 VDC	2.4 VDC	390 mW
High Sensitive Type			VG- 5 (M) S (E)	5 VDC	120 $\Omega$	3.5 VDC	0.25 VDC	210 mW
			VG- 6 (M) S (E)	6 VDC	150 $\Omega$	4.2 VDC	0.3 VDC	240 mW
			VG- 9 (M) S (E)	9 VDC	325 $\Omega$	6.3 VDC	0.45 VDC	250 mW
			VG-12 (M) S (E)	12 VDC	575 $\Omega$	8.4 VDC	0.6 VDC	250 mW
			VG-18 (M) S (E)	18 VDC	1,400 $\Omega$	12.6 VDC	0.9 VDC	240 mW
			VG-24 (M) S (E)	24 VDC	2,230 $\Omega$	16.8 VDC	1.2 VDC	260 mW

Note: All values in the table are measured at 20°C.










## CHARACTERISTIC DATA

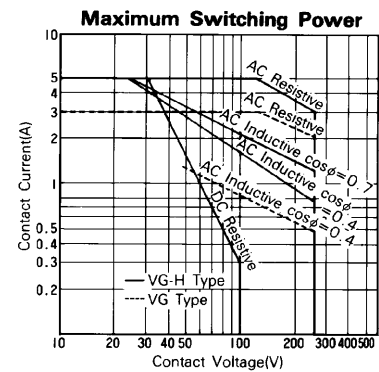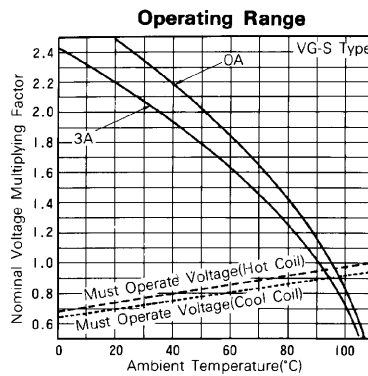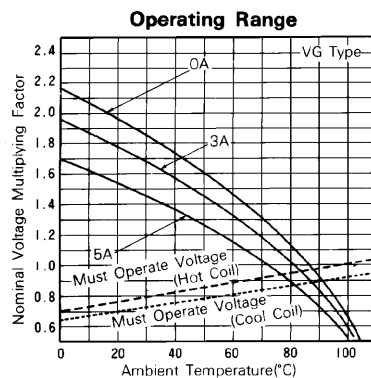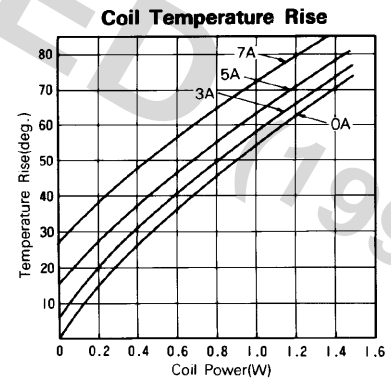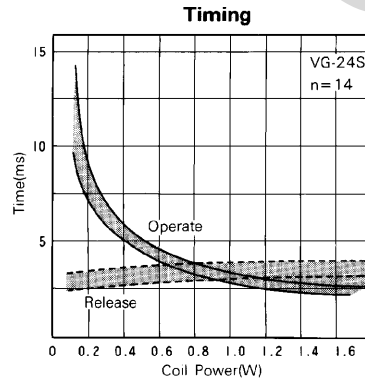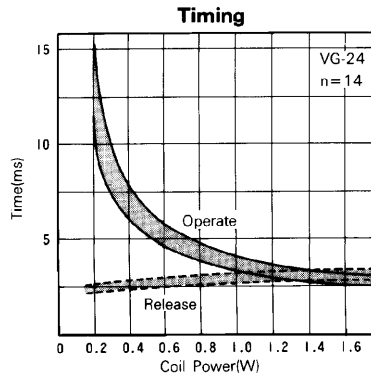

# VG SERIES

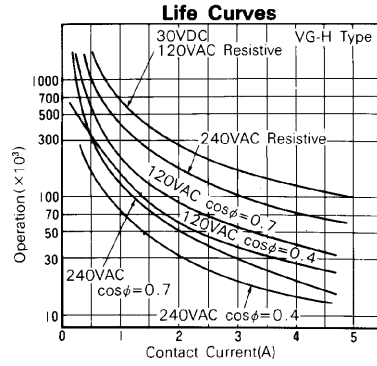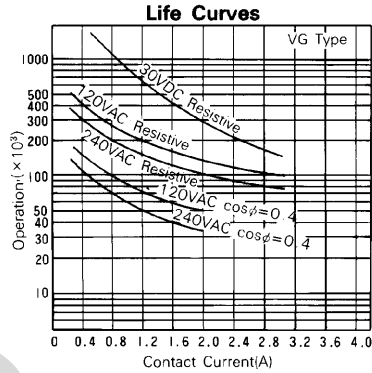

## REFERENCE DATA

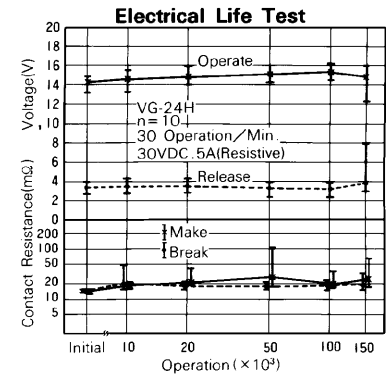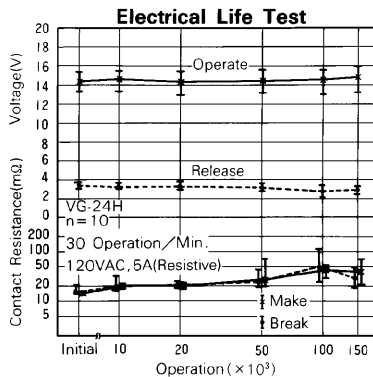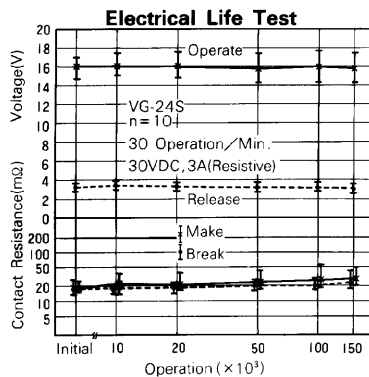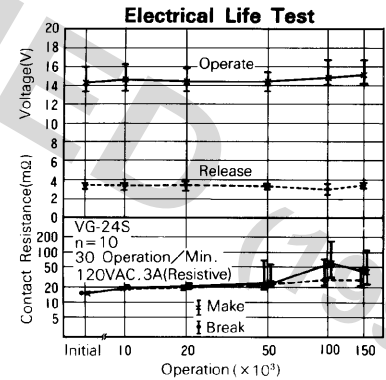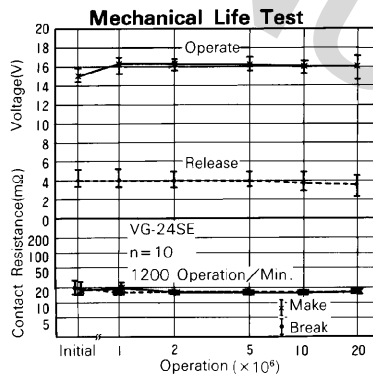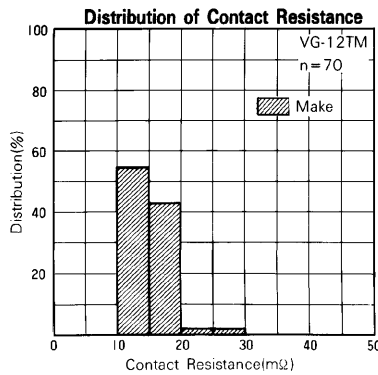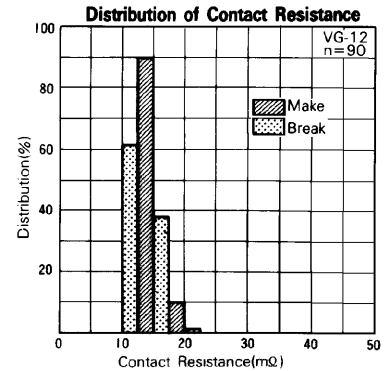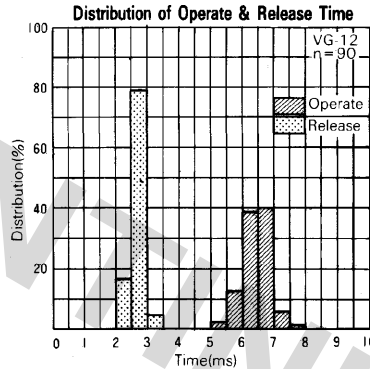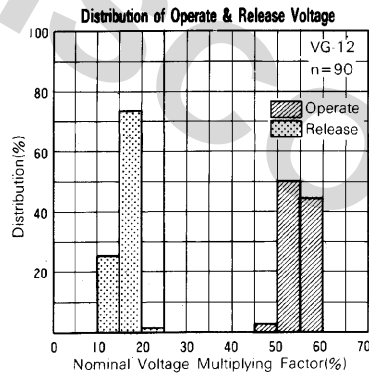


# VG SERIES


## ■ DIMENSIONS

### ● Dimensions


#### VG-M type

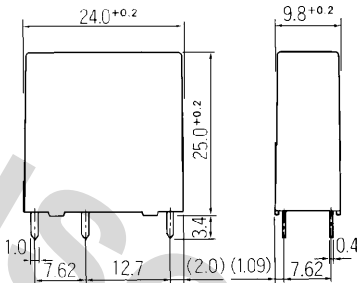




### ● Schematics (BOTTOM VIEW)






### ● PC board mounting hole layout (BOTTOM VIEW)

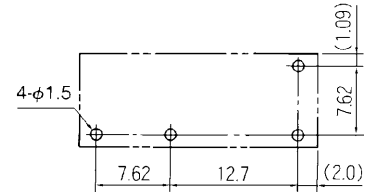




#### VG type

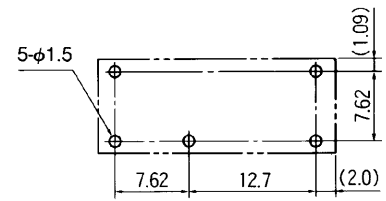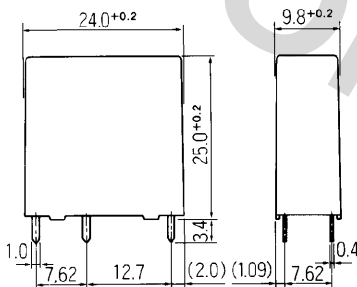

#### VG-M-K type (Plastic sealed type)

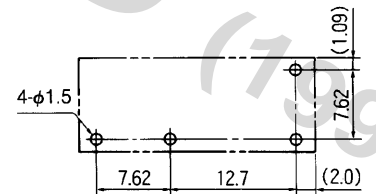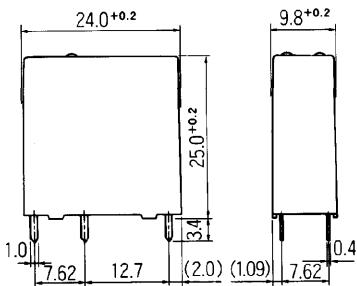

#### VG-K type (Plastic sealed type)

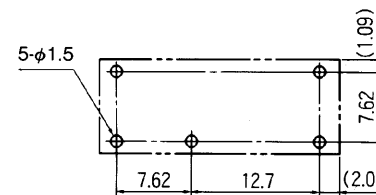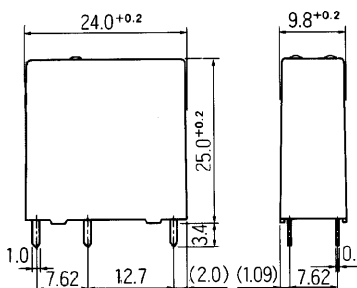


Unit: mm


# VG SERIES

## ● Dimensions



VG-M-C type (Plastic sealed type with tape)

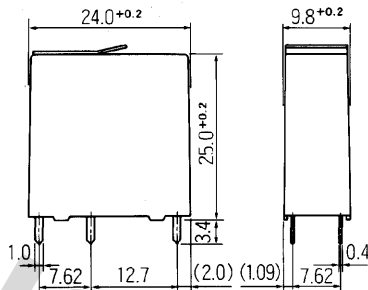



VG-C type (Plastic sealed type with tape)

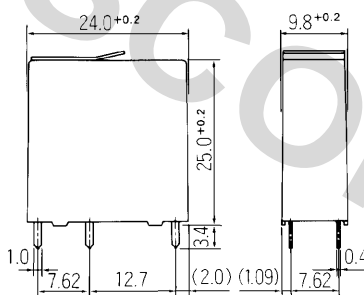

## ● Schematics (BOTTOM VIEW)



## ● PC board mounting hole layout (BOTTOM VIEW)

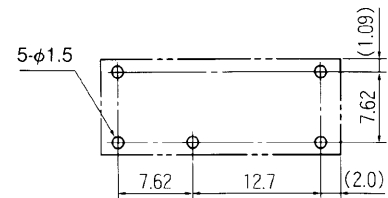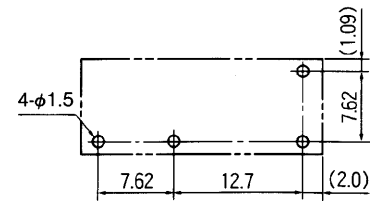

Unit: mm

### Fujitsu Components International Headquarter Offices

#### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

#### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [marcom@fcai.fujitsu.com](mailto:marcom@fcai.fujitsu.com)  
Web: [www.fcai.fujitsu.com](http://www.fcai.fujitsu.com)

#### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info.marketing@fceu.fujitsu.com](mailto:info.marketing@fceu.fujitsu.com)  
Web: [www.fceu.fujitsu.com](http://www.fceu.fujitsu.com)

#### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 375-8560  
Fax: (65) 273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
[www.fcal.fujitsu.com](http://www.fcal.fujitsu.com)