


FUJITSU Component Thermal Printer FTP-64HMCL153 series

Fujitsu 4" high speed (100mm/s) thermal printer mechanism

Overview

The compact, low voltage FTP-64HMCL series provides an ultra low profile design and high speed printing (100mm/s).

The series is suitable for a variety of applications, such as POS/ECR, kiosk terminals, ticket machines, label printers, banking machines, measuring devices, medical equipment, etc.

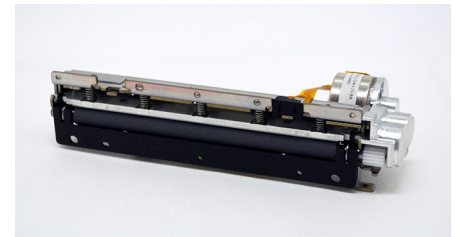

FTP-64HMCL153

Features

- **High-speed printing**
It can print 100mm/s (800 dotlines/s) maximum by using Fujitsu Components' unique head drive control
- **Rear paper insertion mechanism with locking platen**
Fujitsu Components' unique platen release mechanism allows for a straight paper path and easy head maintenance
- **Multi-feature diecast frame**
The rugged die-cast frame provides excellent ESD performance, is shock/vibration resistant and the heat-sink allows for continuous printing.
- **Compact size**
Depth: 29.1mm, width: 144.6mm, height: 42.5mm
- **High resolution**
8 dots/mm head provides clear print out
- **RoHS compliant**
- **UL recognized. File number E171434**

■ Part numbers

Item	Part Number
Printer mechanism	Back insertion FTP-64HMCL153
Interface board	FTP-62HDSL101#01
Interface cable	USB FTP-629Y301#01
	RS-232C FTP-628Y302
Power supply cable	FTP-629Y601


■ Specifications

Item	Specifications	
Part number	FTP-64HMCL153	
Printing method	Thermal sensitive line dot method	
Dot structure	832 dots/lines	
Dot pitch (horizontal)	0.125mm (8 dots/mm) - Dot density	
Dot pitch (vertical)	0.125mm (8 dots/mm) - Line feed pitch	
Effective printing area	104mm	
Paper width	114mm +0/-1	
Paper thickness	60-150μm (there may be exceptions)	
Cutting type	---	
Printing speed	100mm/s (800 dot lines/s) *1	
Character types	Alphanumeric KANA: 159 types International and special: 195 types OCRI: 103 types CCRIII: 23 types OCRIV: 103 types Extended numeric: 12 types JIS KANJI level 1,2, non-Kanji: JIS KANJI: approx. 6,800 Traditional Chinese: 13,503	
Character dimensions (W x H), number of characters	8 x 16 dots, 104 columns, ANK, 12 x 24 dots, 69 columns, ANK 16 x 16 dots, 52 columns, ANK 24 x 24 dots, 34 columns, ANK	24 x 40 dots, 34 columns, OCRI 24 x 48 dots, 34 columns, OCRII 36 x 60 dots, 23 columns, OCRIV 24 x 48 dots, 34 columns, extended numeric
Power	For head	4.2 to 9.5VDC, 2.4A (7.2V, 176 Ω, +25°C, concurrent applied dot number: 64 dots)
	For printer motor	4.2 to 9.5VDC, 1.5A maximum (using Fujitsu Components' standard constant current circuit drive)
	For logic	3.3 or 5 VDC ±10%. 0.1A maximum
Dimensions (WxDxH)	Printer mechanism	144.6 x 29.1 x 42.5mm
Weight	Printer mechanism	170g
Expected life	Head	Pulse durability: 100 million pulse/dot (using Fujitsu Components' standard driving method) Wear resistance: 100km (at 12.5% print ratio)
Environmental conditions	Operating temperature	+5°C to +40°C (guarantee)
	Operating humidity	20 to 85% RH (no condensation)
	Storage temperature	-40°C to +70°C (excluding paper)
	Storage humidity	5 to 95% RH (no condensation)
Detection functions	Head temperature	By thermistor
	Motor temperature	Thermistor
	Paper out/Mark detect	By photointerrupter
	Head release	By slide switch
Recommended thermal sensitive paper	PD150R (Oji paper)	

*1: Head voltage 7.6V, ambient temperature 25°C, concurrent applied dots 128 dots maximum, high speed mode, motor drive current 600mA/phase, use standard paper

■ Dimensions

- Printer mechanism 4-inch

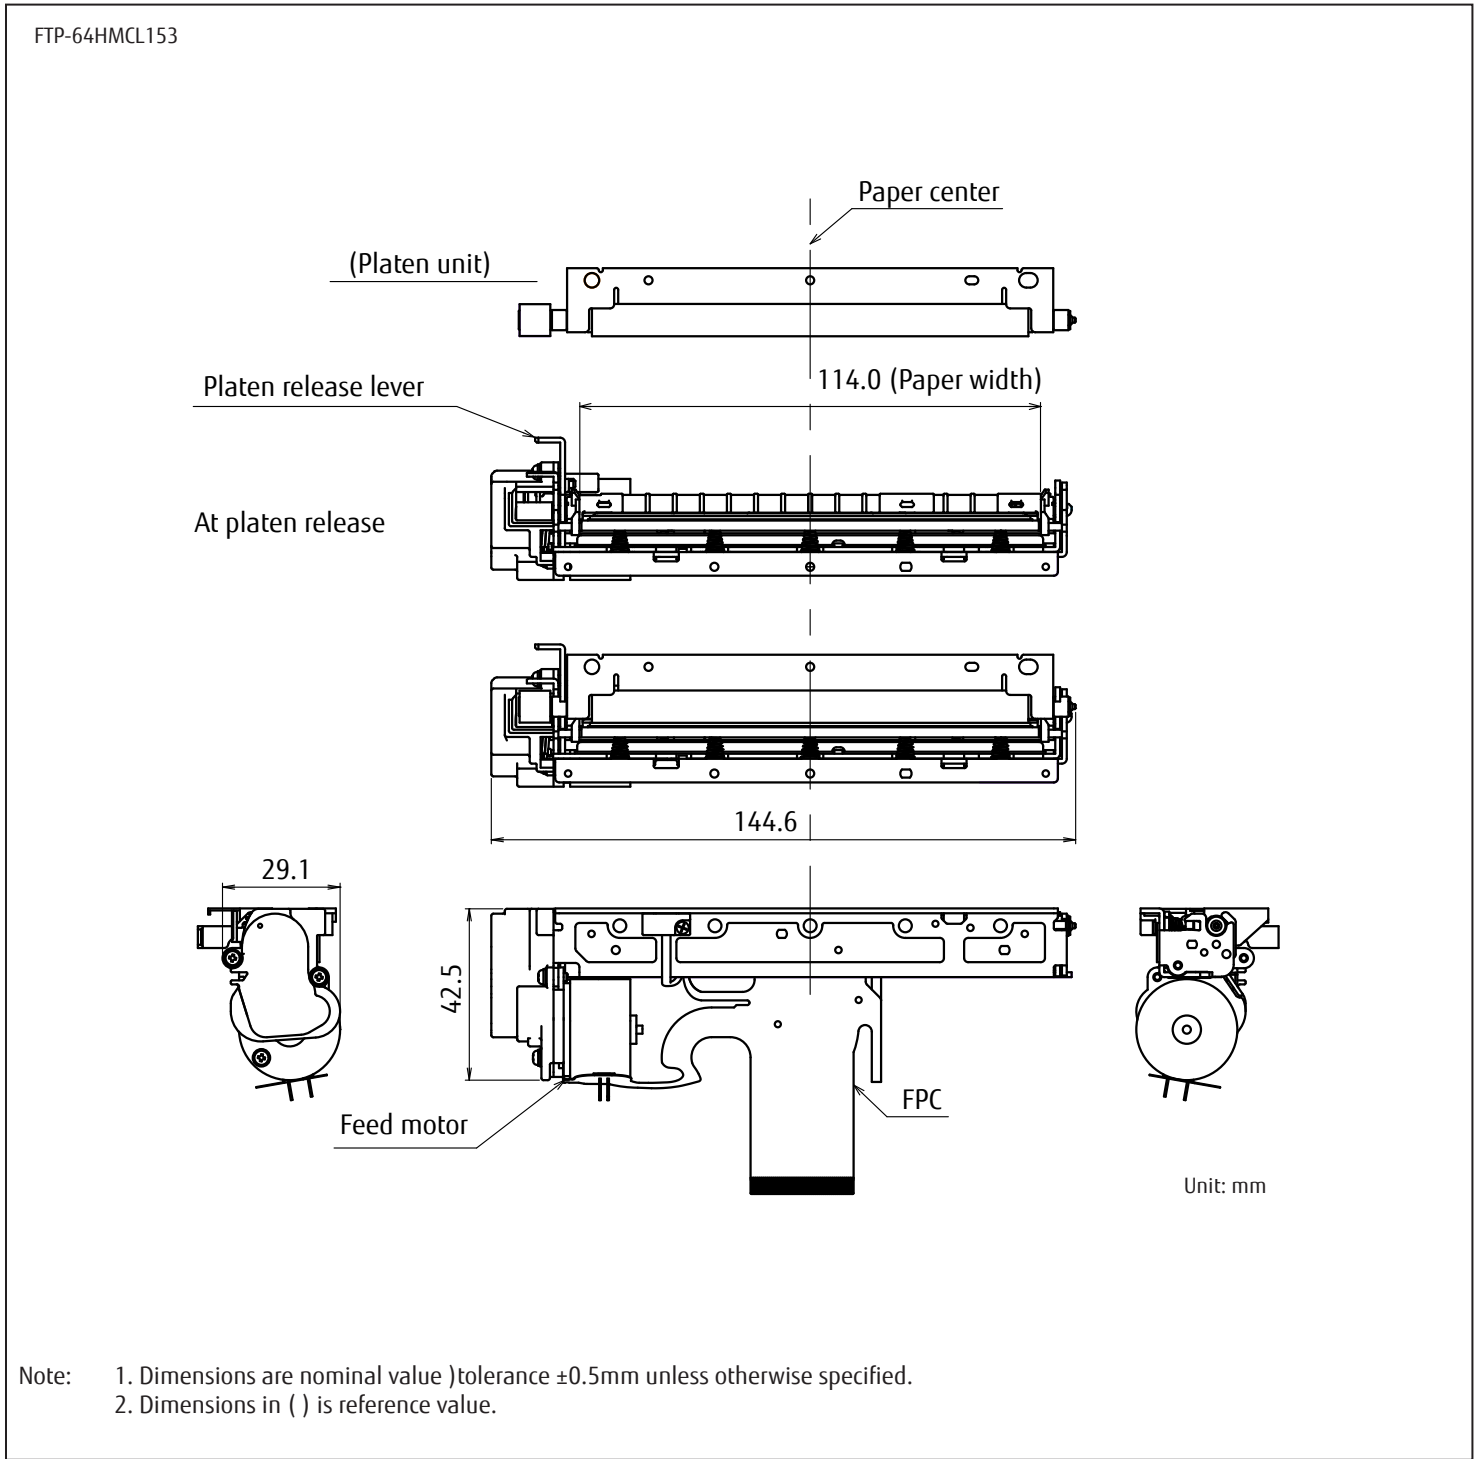

■ Connector pin assignments of cutter (FPC) 52559-4052 (Molex)

No	Signal	Content	I/O
1	VSEN	Paper sensor power	IN
2	PHK	Cathode for photo interrupter	OUT
3	PHE	Emitter for photo interrupter	OUT
4	N.C.	Not connected	-
5	N.C.	Not connected	-
6	VH	Head drive power	IN
7	VH	Head drive power	IN
8	VH	Head drive power	IN
9	VH	Head drive power	IN
10	DI	Data in	IN
11	CLK	Clock	IN
12	GND	Head ground	-
13	GND	Head ground	-
14	GND	Head ground	-
15	GND	Head ground	-
16	STB7	Strobe7	IN
17	STB6	Strobe6	IN
18	STB5	Strobe5	IN
19	VDD	Logic power	IN
20	TM	Thermistor	OUT
21	STB4	Strobe4	IN
22	STB3	Strobe3	IN
23	STB2	Strobe2	IN
24	STB1	Strobe1	IN
25	GND	Head ground	-
26	GND	Head ground	-
27	GND	Head ground	-
28	GND	Head ground	-
29	/LAT	/Data latch	IN
30	DO	Data out	OUT
31	VH	Head drive power	IN
32	VH	Head drive power	IN
33	VH	Head drive power	IN
34	VH	Head drive power	IN
35	N.C.	Not connected	-
36	N.C.	Not connected	-
37	SW	Platen switch release	OUT
38	SW	Platen switch release	OUT
39	FG	Flame grand	-
40	MTM	Motor thermistor	OUT

■ Connector pin assignments of cutter (FPC) 52559-4052 (Molex)

No	Signal	Content	I/O
41	MTM	Motor thermistor	OUT
42	N.C.	Not connected	-
43	MT_/A	Excitation signal /A	SINK/SOURCE
44	MT_/A	Excitation signal /A	SINK/SOURCE
45	MT_A	Excitation signal A	SINK/SOURCE
46	MT_A	Excitation signal A	SINK/SOURCE
47	MT_/B	Excitation signal /B	SINK/SOURCE
48	MT_/B	Excitation signal /B	SINK/SOURCE
49	MT_B	Excitation signal B	SINK/SOURCE
50	MT_B	Excitation signal B	SINK/SOURCE

Contact

Japan
 FUJITSU COMPONENT LIMITED
 Shinagawa Seaside Park Tower
 12-4, Higashi-shinagawa 4-chome,
 Tokyo 140 0002, Japan
 Tel: (81-3) 3450-1682
 Fax: (81-3) 3474-2385
 Email: fcl-contact@cs.jp.fujitsu.com
 Web: www.fujitsu.com/jp/group/fcl/en/

Europe
 FUJITSU COMPONENTS EUROPE B.V.
 Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands
 Tel: (31-23) 5560910
 Fax: (31-23) 5560950
 Email: info@fceu.fujitsu.com
 Web: emea.fujitsu.com/components/

China
 FUJITSU ELECTRONIC COMPONENTS
 (SHANGHAI) CO., LTD.
 Unit 4306, InterContinental Center
 100 Yu Tong Road, Shanghai 200070, China
 Tel: (86 21) 3253 0998 / Fax: (86 21) 3253 0997
 Email: fcsh@cn.fujitsu.com
 www.fujitsu.com/cn/products/devices/
 components/

Korea
 FUJITSU COMPONENTS KOREA, LTD.
 Alpha Tower #403,
 645 Sampyeong-dong,
 Bundang-gu, Seongnam-si,
 Gyeonggi-do, 13524 Korea
 Tel: (82 31) 708-7108
 Fax: (82 31) 709-7108
 Email: fcal@sg.fujitsu.com
 www.fujitsu.com/sg/products/
 devices/components/

North and South America
 FUJITSU COMPONENTS AMERICA, INC.
 1230 E. Arques Ave., MS 160
 Sunnyvale, CA 94085 U.S.A.
 Tel: (1-408) 745-4900
 Fax: (1-408) 745-4970
 Email: components@us.fujitsu.com
 Web: http://us.fujitsu.com/components/

Asia Pacific
 FUJITSU COMPONENTS ASIA, Ltd.
 102E Pasir Panjang Road
 #01-01 Citilink Warehouse Complex,
 Singapore 118529
 Tel: (65) 6375-8560 / Fax: (65) 6273-3021
 Email: fcal@sg.fujitsu.com
 www.fujitsu.com/sg/products/devices/
 components/

Hong Kong
 FUJITSU COMPONENTS HONG KONG Co., Ltd.
 Room 06, 28/F, Greenfield Tower, Concordia
 Plaza, No.1 Science Museum Road,
 Tsim Sha Tsui East, Kowloon, Hong Kong
 Tel: (852) 2881 8495 Fax: (852) 2894 9512
 Email: fcal@sg.fujitsu.com
 www.fujitsu.com/sg/products/devices/
 components/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2020 Fujitsu Components America, Inc. All rights reserved. Revised November 13, 2020.