

FUJITSU Component Wireless Modules

Bluetooth® Version 5.0 Sensor Embedded Beacon

FWM8BLZ07A

Overview

A Bluetooth Version 5.0 sensor embedded beacon. Integration of 6 different sensors for IoT applications make multiple sensing capabilities to many different types of combination of the requirement.

Suitable for a variety of applications, such as monitoring work environments, machine operating conditions, and cargo transportation conditions.



RoHS compliant

Features

- **Selection of 3 types of sensor data reporting**
 - Via advertise packet - Beacon outputs sensor data by using auto broadcast function
 - Via Fujitsu Components Data Communication (FDC) (*1)
Beacon outputs sensor data in preset intervals
 - Using Sensor Value Characteristic (*2)
Data is stored in sensor module and central equipment accesses the module to read data
- **Integrates 6 different sensors for IoT applications, enabling the use of multiple sensors in different combinations.**
- **OTA configuration mode**
In *Over-The-Air* (OTA) config mode the beacon unit settings and data can be re-configured by connecting to the central device
- **LED status indicator**
The Beacon status can be displayed on the LED indicator
- **Long operation life with coin cell battery**
The Beacon is able to operate for more than 6 months at advertise packet output (*3), 3 months at FDC output (*4), 6 months at Sensor Value Characteristic output (*5).



FWM8BLZ07A

■ Sensor specifications

Sense interval	990 ms (changeable between 200 to 60,000 ms)
Temperature	-30°C to +60°C
Humidity	20% to 80%, accuracy ±3.0%
Barometric pressure	300 hPa to 1,000 hPa, accuracy ±1.0 hPa
Illuminance	0 LX to 10,000 LX
3-axis acceleration	±16G, accuracy ±3.0%
Sound level	0 dB SPL to 90 dB SPL

Notes:

- *1: Fujitsu Component unique data transmission profile, equipped in the beacon as standard
- *2: Sensor Value Characteristic is a function set in 'Characteristic', GATT specification of Bluetooth Smart, to have central equipment read. *Sensor Value Characteristic* is a unique Fujitsu Component name.
- *3: At 5 seconds sense interval and advertise interval.
- *4: At 5 seconds sense intervals and 1 second connection interval.
- *5: At 5 seconds sense interval.

■ Specifications

Item	Specifications
Part number	FWM8BLZ07A (xxxxxx: suffix to specify each customer's settings)
Type	Sensor embedded beacon
Antenna	Embedded (pattern antenna)
Bluetooth technology	Bluetooth core specification Version 5.0 (LE single mode)
Transmit power	-16, -12, -8, -4, 0, +4 dBm (changeable by command)
IC	Nordic Semiconductor nRF52832
Power supply	Coin cell lithium battery CR2450 (not included)
Operating temperature / humidity	-30°C to +60°C, 20 to 80% RH
Dimensions / Weight	40 x 31 x 12mm / Approx. 10g (without battery)
Certifications	Bluetooth Qualification (QDID), Radio Act (Japan), FCC, ISED, CE
Other	Battery voltage notification function Secure advertise function (*6)

Notes: *6: Encryption of advertise data is not available by the secure advertise function.

■ Battery specifications

Note: Use of coin type lithium battery CR2450
Please use the battery meets Figure 1 (minus electrode height min. 0.9mm, diameter max. 23 mm) to keep enough clearance between beacon holder and battery.


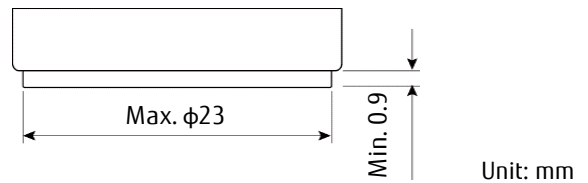


Figure 1

■ Dimensions

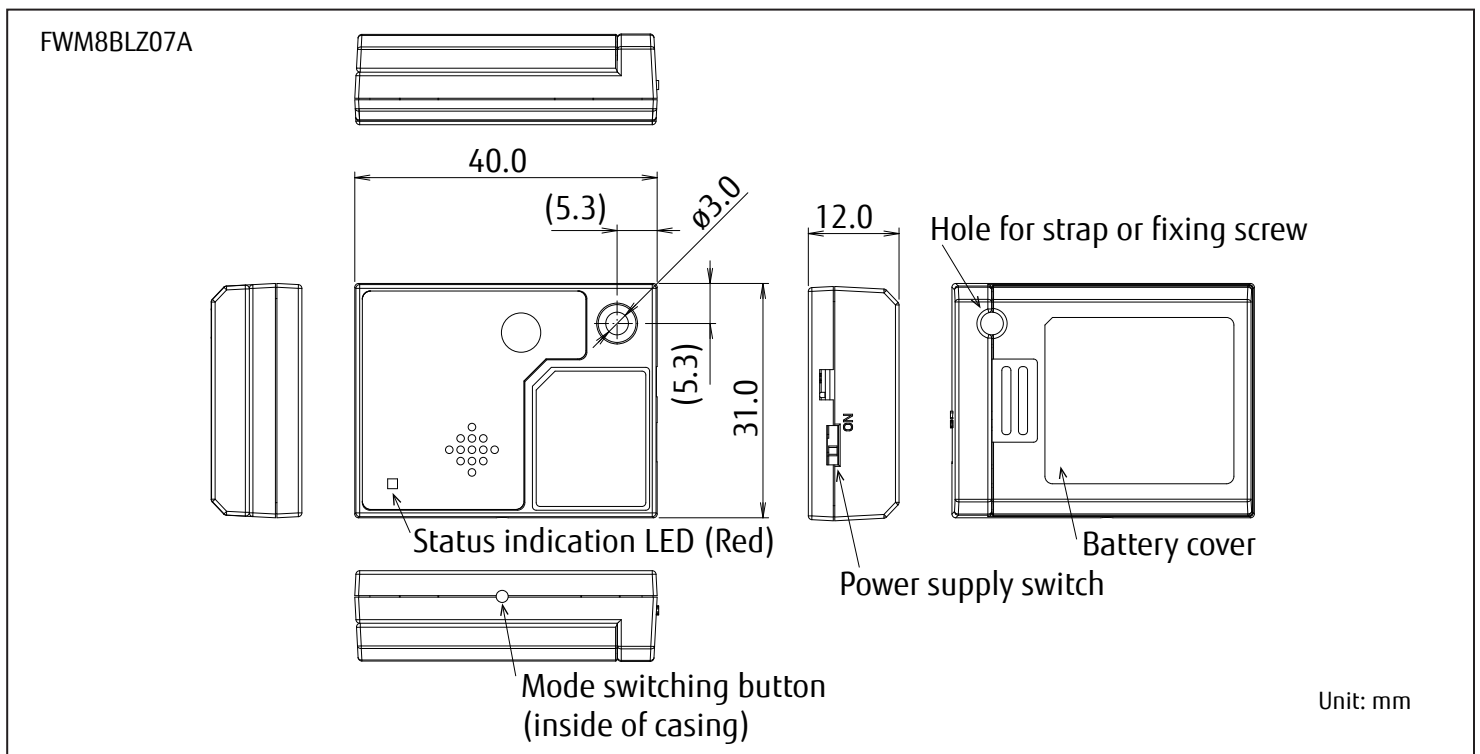

Note: The *Bluetooth*® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Fujitsu Component is under license. Other trademarks and trade names are those of their respective owners.

Contact

Japan FUJITSU COMPONENT LIMITED Shinagawa Seaside Park Tower 12-4, Higashi-shinagawa 4-chome, Tokyo 140 0002, Japan Tel: (81-3) 3450-1682 Fax: (81-3) 3474-2385 Email: fcl-contact@cs.jp.fujitsu.com Web: www.fujitsu.com/jp/group/fcl/en/	Europe FUJITSU COMPONENTS EUROPE B.V. Diamantlaan 25 2132 WV Hoofddorp Netherlands Tel: (31-23) 5560910 Fax: (31-23) 5560950 Email: info@fceu.fujitsu.com Web: emea.fujitsu.com/components/	China FUJITSU ELECTRONIC COMPONENTS (SHANGHAI) CO., LTD. Unit 4306, InterContinental Center 100 Yu Tong Road, Shanghai 200070, China Tel: (86 21) 3253 0998 /Fax: (86 21) 3253 0997 Email: fcsh@cn.fujitsu.com www.fujitsu.com/cn/products/devices/ components/	Korea FUJITSU COMPONENTS KOREA, LTD. Alpha Tower #403, 645 Sampyeong-dong, Bundang-gu, Seongnam-si, Gyeonggi-do, 13524 Korea Tel: (82 31) 708-7108 Fax: (82 31) 709-7108 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/ devices/components/
North and South America FUJITSU COMPONENTS AMERICA, INC. 1230 E. Arques Ave., M/S 160 Sunnyvale, CA 94085 U.S.A. Tel: (1-408) 745-4900 Fax: (1-408) 745-4970 Email: components@us.fujitsu.com Web: http://us.fujitsu.com/components/	Asia Pacific FUJITSU COMPONENTS ASIA, Ltd. 102E Pasir Panjang Road #01-01 Citilink Warehouse Complex, Singapore 118529 Tel: (65) 6375-8560 / Fax: (65) 6273-3021 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/ components/	Hong Kong FUJITSU COMPONENTS HONG KONG Co., Ltd. Room 06, 28/F, Greenfield Tower, Concordia Plaza, No.1 Science Museum Road, Tsim Sha Tsui East, Kowloon, Hong Kong Tel: (852) 2881 8495 Fax: (852) 2894 9512 Email: fcal@sg.fujitsu.com www.fujitsu.com/sg/products/devices/ components/	

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2020 Fujitsu Components America, Inc. All rights reserved. Revised February 18, 2020.
