



Customer display utility

1. Firmware update


(1) Run “Fujitsu Linedisplay Utility.exe”

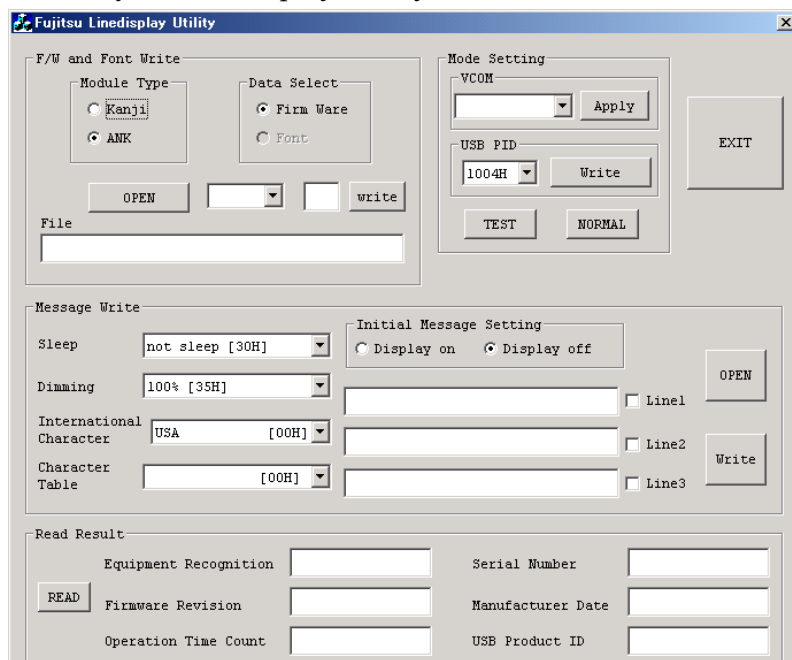


(2) Set COM port to COM46.

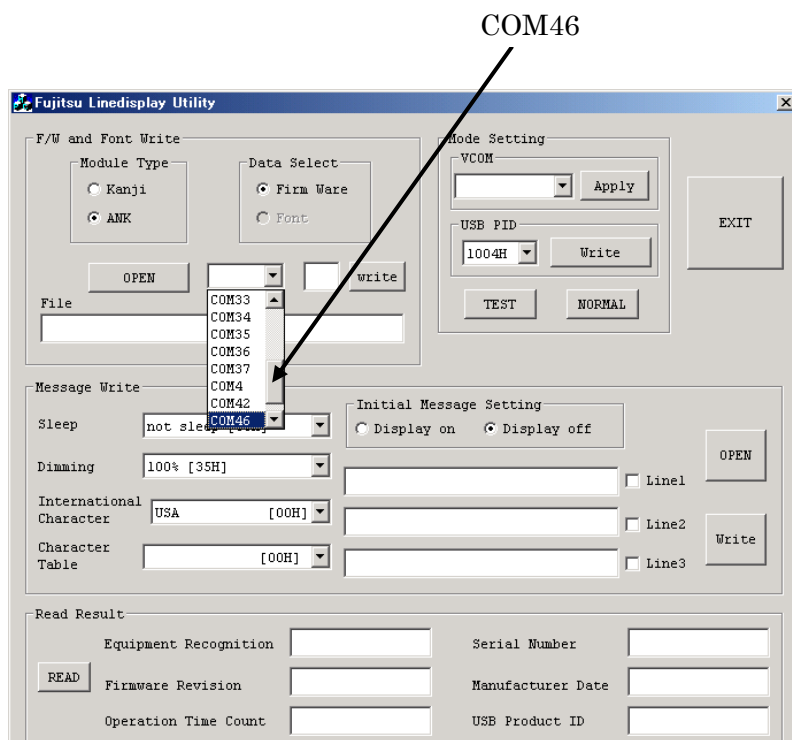

- (3) Click “OPEN” button and select firmware file “1P90A03005.bin”.

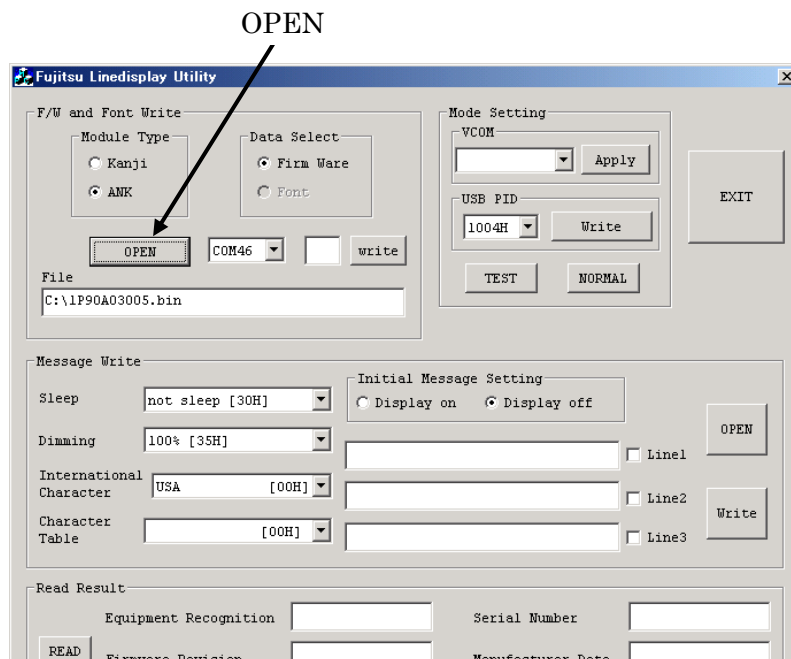


- (4) Click “write” button. After that the firmware update is completed correctly, “OK” will display.

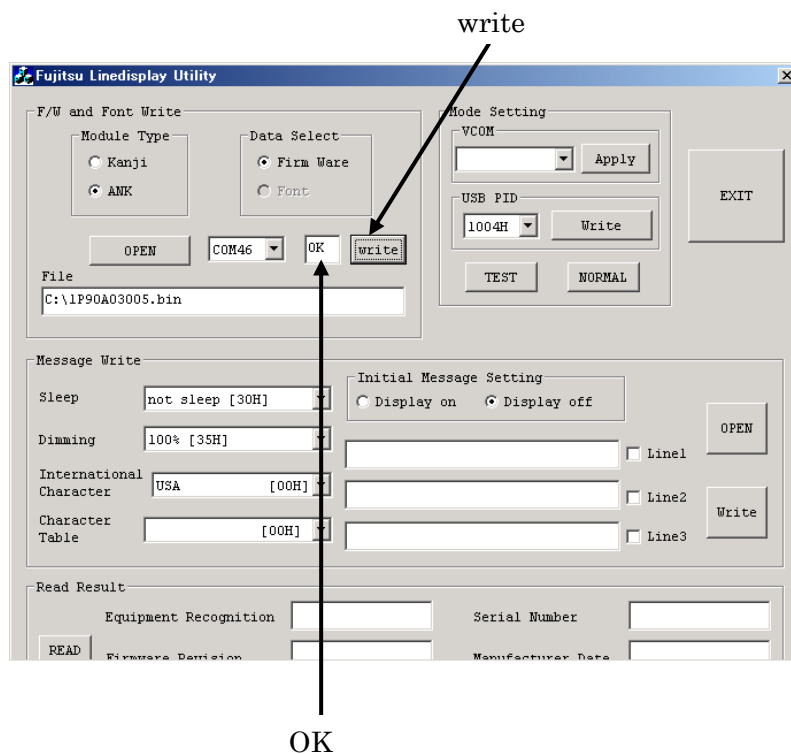


2. Set to Cyrillic character

(1) Select “Cyrillic” in Character Table

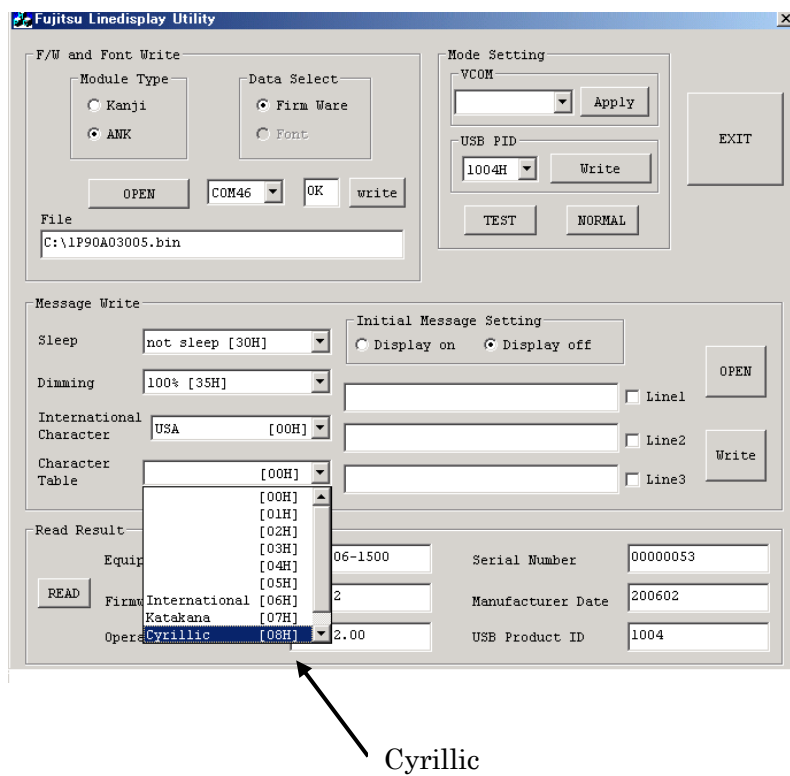

(2) Click “write” button.

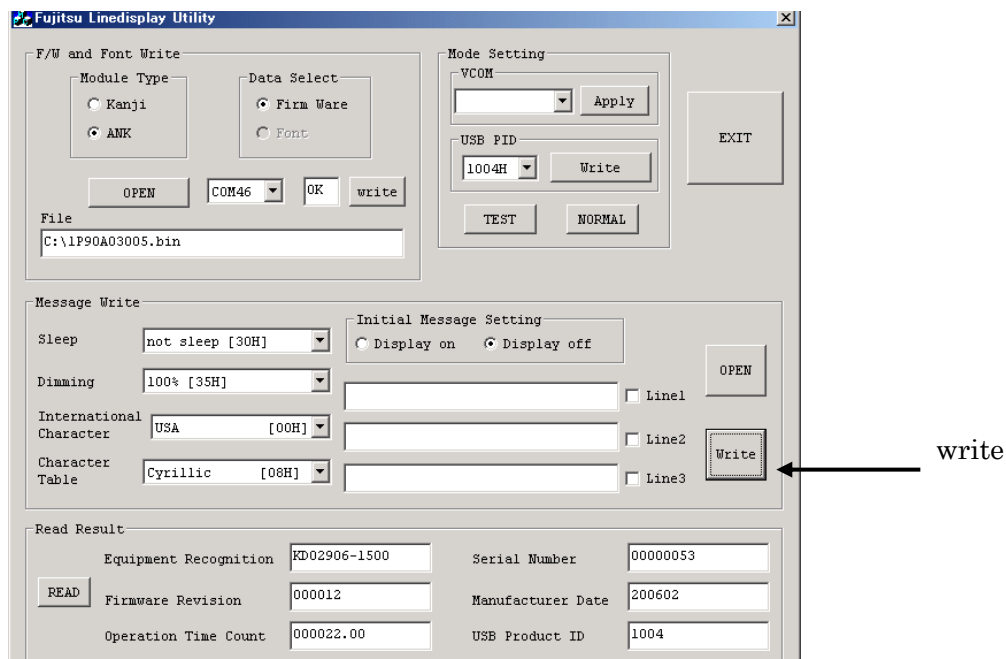

(3) Click “EXIT” button.