


Fujitsu Cash Handling Component F56

Multi Cassette Media Dispenser

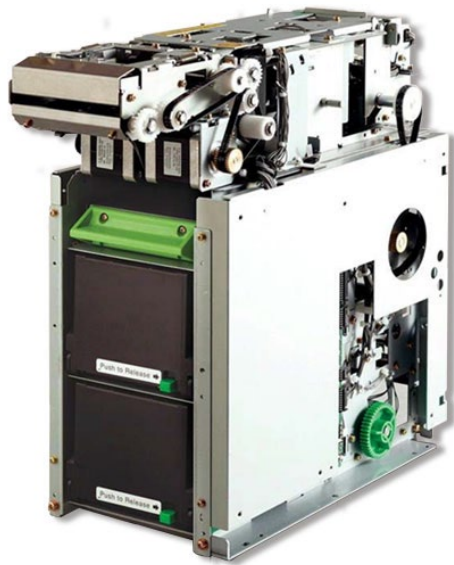

■ Compact and Multi Cassette Media Dispenser

Designed for the OEM market, the Fujitsu F56 dispenser features six cassettes that can hold up to a total of 3,000 notes or other media.

- Width 6.3 in (160mm)
- Depth 15.4 in (392mm)
- Height 14 .8 in (375mm) 2-Denominations
- Up to 500 notes / cassette

■ High-end features at low cost

The Fujitsu F56 offers many features usually found only in more expensive units.


- RS232C
- Bunch presenter
- Bill low sensor
- Denomination sensor
- Shutter (option)
- Predictive failure analysis
- Lockable cassette option
- Firmware download
- Single note reject

■ Flexible, Easy integration

The Fujitsu F56 provides you with maximum flexibility in product design. It can be installed as a front-service or rear-service configuration.



F56 Multi Cassette Bill Dispenser

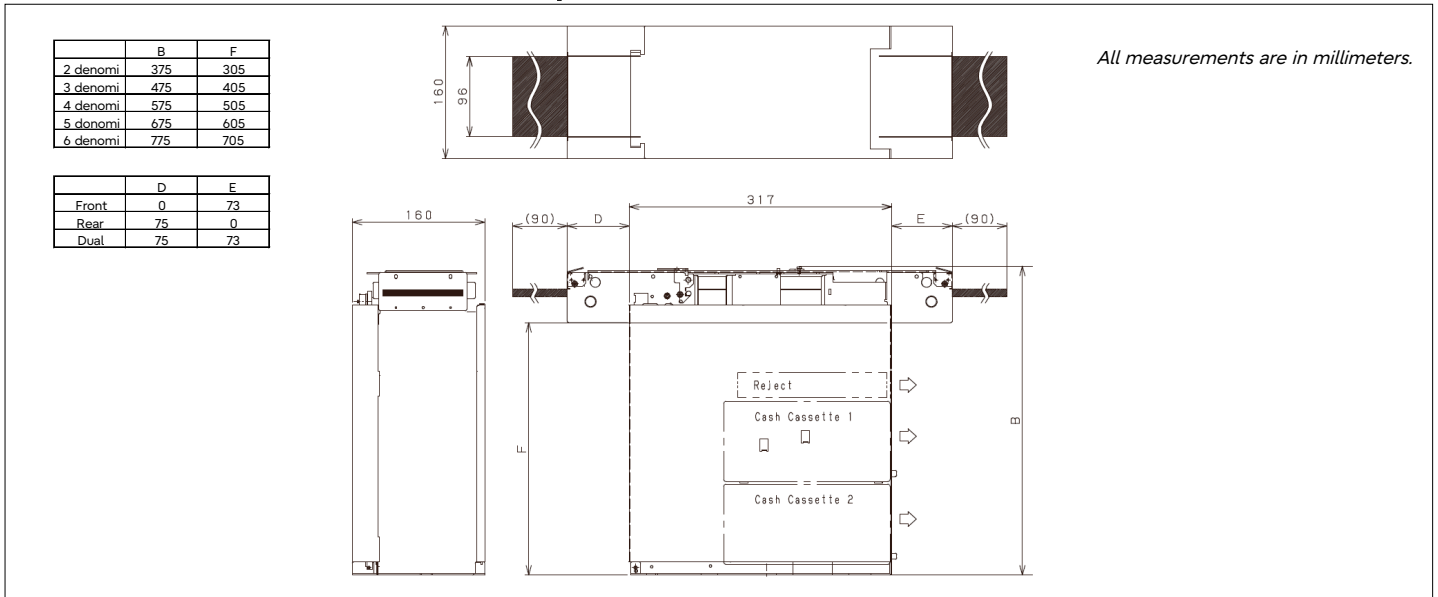

Specifications

| | | |
|---|--|----------------------|
| Dimensions (W x D x H) 2-denominations (Rear access) | 160mm x 392mm x 375mm (Cassette: 116mm x 216mm x 98mm) | |
| Weight (W/O media) | Approx. 11kg (Cassette: 0.7kg) | |
| Service Access | Front or Rear access or Dual | |
| Number of Cassettes | Up to 6 cassettes (Standard 2 cassettes) | |
| Bill count speed | 2 notes / second | |
| Acceptable Media Range | Max. 82mm x 160mm Min. 60mm x 120mm Thickness 0.09 - 0.3mm | |
| Bill transaction | 20 bills /transaction | |
| Bill retrieval (Optional) | One time standard Max. 60 bills | |
| Shutter (Optional) | Optional | |
| Capacities / denominations | Accommodation: 60mm New notes: Approx. 500 each cassette | |
| Standard | UL,TUV certified | |
| Reject bill area capacity | Max. 20 bills | |
| Bill low sensor | Fixed sensor Approx. 40 bills each cassette | |
| Interface | RS232C | |
| Electrical Power Requirements | DC +24V(±10%) | Max. 7A, Ave. 5A |
| Temperature | Operation 0 - 40°C | Stop State -5 - 50°C |
| Relative Humidity | Operation 10 - 85%RH | Stop State 8 - 90%RH |

Note1. Note capacity is based on the condition of notes.

Note2. Above specifications may be changed without prior notice.

Contact

Fujitsu Frontech Limited

Global Business Unit

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <http://www.fujitsu.com/jp/group/frontech/en/>

Inquiry: <http://www.fujitsu.com/jp/group/frontech/en/contact/>