

FUJITSU Cash Handling Component G610

Powerful Multi-Cassette Media Recycling Module



Second generation

Fujitsu's cash recycling technology has evolved into the second generation. The bill transport performance improved by the analysis of various kinds of banknote conditions and operational needs worldwide contributes to accomplishing the higher stability of their equipment's running.

Fujitsu for you

The FUJITSU G610 is backed by Fujitsu's team of experienced, dedicated professionals who are committed to bringing you the devices you need to create solutions that will help your customers succeed. Tell us about your unique OEM requirements and make Fujitsu a part of your team.

Main features

■ High security

- The module structure to place its entire unit in the UL and/or the CEN-4 compliant safes
- Advanced banknote validation
- Easily to build into "Through-the-Wall" ATMs

■ Quick ATM development

- Slot-type presenter (4 length options) with design affinity of familiar cash dispensing devices
- Compact size module with slide rails
- Compliant to the world standard CEN/XFS 3.0, and USB1.1 interface

■ High flexibility


- The deposit cassette and the recycle cassette can be configured in any combination from 1 to 4 cassettes.

■ Easy maintenance

- Easy to remove jammed papers from the safe by pulling out the entire module

G610 Multi-Cassette Recycling Module

All measurements are in millimeters.

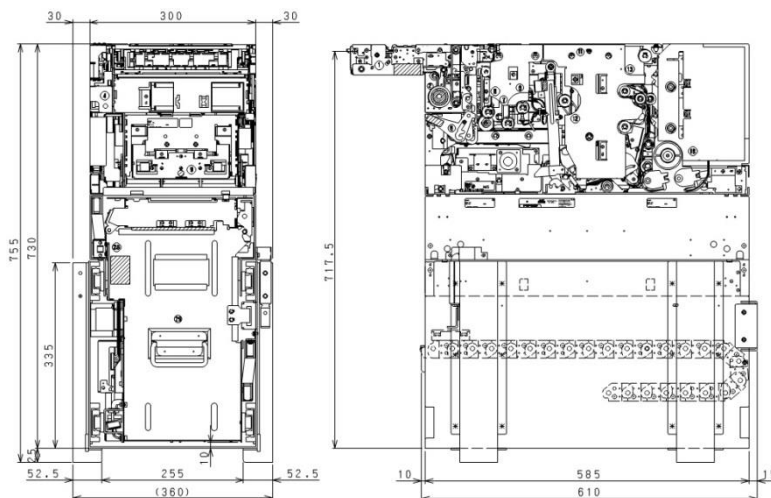

Specifications

Dimensions (W x D x H)	360mm x 610mm x 755mm (A cradle and side rails are included)	
Weight (W/O media)	Approx. 130kg (A cradle, slide rails and cassettes are included)	
Service Access	Front or Rear access	
Number of Cassettes	Up to 4 Cassettes The deposit cassette and the recycle cassette can be configured in any combination from 1 to 4 cassettes.	
Acceptable Media Range	Max. 86mm x 166mm Min. 60mm x 120mm	
Capacities	Approx. 8,300 New Bills 3 Recycling Cassettes + 1 Deposit Cassette Recycling Cassette: Approx. 2,000 New Bills Deposit Cassette: Approx. 2,300 New Bills	
CEN/XFS Service Providers	CEN/XFS 3.0 Compatible	
Interface	USB1.1	
Electrical Power Requirements	DC +24V (+10%, -8%)	Ave. 22.5A Peak 31.0A
Temperature	Operation 5 - 50°C	Stop State -5 - 50°C
Relative Humidity	Operation 20 - 80%RH	Stop State 10 - 90%RH

Note1. Note capacity is based on the condition of notes.

Note2. Above specifications may be changed without prior notice.

Contact

FUJITSU FRONTECH LIMITED

Global Business Group

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <http://www.fujitsu.com/jp/group/frontech/en/>

Inquiry: <http://www.fujitsu.com/jp/group/frontech/en/contact/>