

FUJITSU Cash Handling Component F56 Multi Cassette Media Dispenser



■ Compact and Multi Cassette Media Dispenser

Designed for the OEM market, the FUJITSU F56 dispenser features six cassettes that can hold up to a total of 3,000 notes or other media.

- Width 6.3 in (160mm)
- Depth 15.4 in (392mm)
- Height 14 .8 in (375mm) 2-Denominations
- Up to 500 notes / cassette


■ High-end features at low cost

The FUJITSU F56 offers many features usually found only in more expensive units.

- RS232C
- Bunch presenter
- Bill low sensor
- Denomination sensor
- Shutter (option)
- Predictive failure analysis
- Lockable cassette option
- Firmware download
- Single note reject

■ Flexible, Easy integration

The FUJITSU F56 provides you with maximum flexibility in product design. It can be installed as a front-service or rear-service configuration.




F56 Multi Cassette Bill Dispenser

All measurements are in millimeters.

	B	F
2 denomi	375	305
3 denomi	475	405
4 denomi	575	505
5 denomi	675	605
6 denomi	775	705

	D	E
Front	0	73
Rear	75	0
Dual	75	73

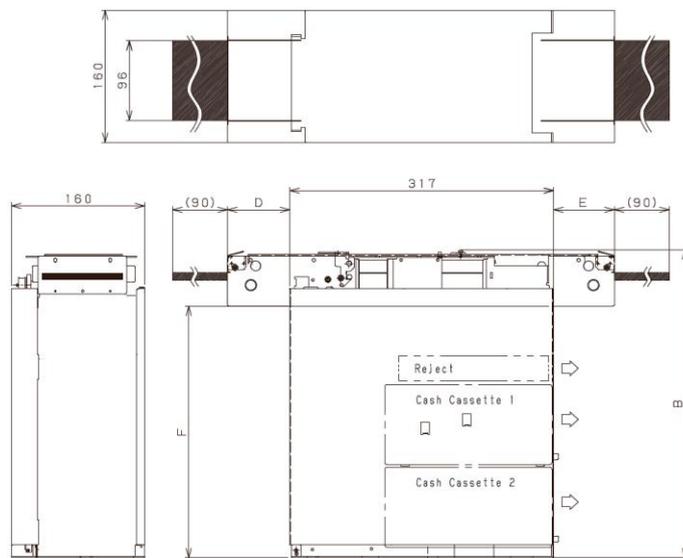

Specifications

Dimensions (W x D x H) 2-denominations (Rear access)	160mm x 392mm x 375mm (Cassette: 116mm x 216mm x 98mm)	
Weight (W/O media)	Approx. 11kg (Cassette: 0.7kg)	
Service Access	Front or Rear access or Dual	
Number of Cassettes	Up to 6 cassettes (Standard 2 cassettes)	
Bill count speed	2 notes / second	
Acceptable Media Range	Max. 82mm x 160mm Min. 60mm x 120mm Thickness 0.09 - 0.3mm	
Bill transaction	20 bills /transaction	
Bill retrieval (Optional)	One time standard Max. 60 bills	
Shutter (Optional)	Optional	
Capacities / denominations	Accommodation 60mm New notes: Approx. 500 each cassette	
Standard	UL, TUV certified	
Reject bill area capacity	Max. 20 bills	
Bill low sensor	Fixed sensor Approx. 40 bills each cassette	
Interface	RS232C	
Electrical Power Requirements	DC +24V (±10%)	Max. 7A, Ave. 5A
Temperature	Operation 0 - 40°C	Stop State -5 - 50°C
Relative Humidity	Operation 10 - 85%RH	Stop State 8 - 90%RH

Note1. Note capacity is based on the condition of notes.

Note2. Above specifications may be changed without prior notice.

Contact

FUJITSU FRONTECH LIMITED

Global Business Group

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <http://www.fujitsu.com/jp/group/frontech/en/>

Inquiry: <http://www.fujitsu.com/jp/group/frontech/en/contact/>