

# 24V DRIVEN, FTP-607 Series

# 2" HIGH SPEED THERMAL PRINTER

## FTP-627MCL401/411/601


### ■ OVERVIEW

The FTP-627 MCL Series are 24V driven high-speed printers with a ultra low profile auto cutter and long life.

The FTP-627 MCL Series can be used for a variety of applications, such as POS terminals, ticket vending machines, label printers, banking terminals, and measurement and medical equipment.

### ■ HIGHLIGHTS

- **Ultra low profile**  
Height 21.8 mm, width 81.2 mm, depth 42.2 mm
- **High speed printing**  
It can print at 100/150/200mm/s (800/1200/1600 dotlines/s) maximum by using Fujitsu's unique head drive control.
- **Auto Cutter**  
Long life and high reliable guillotine with dedicated motor.
- **Easy paper setting**  
Our lever platen release mechanism allows a wide paper route, so paper can be easily inserted.  
Conventional auto loading is also available.
- **Multifunctional die-cast frame**  
Wide operating temperature range, long continuous printing, high ESD absorption and discharge of static electricity vibration and shock resistant.
- **RoHS compliant**

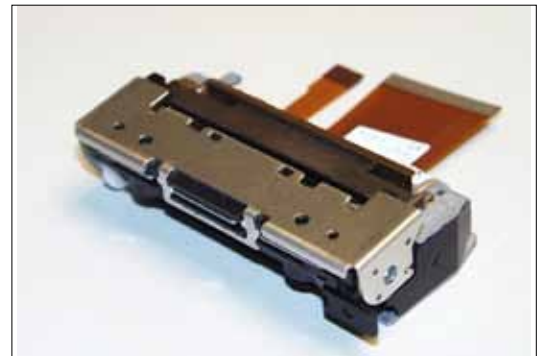

FTP-627MCL401/601



FTP-627DSL291R



FTP-627DSL601R

## ■ PART NUMBERS

			Part Number
Easy Load Model with low profile cutter			FTP-627MCL401 FTP-627MCL411 FTP-627MCL601
LSI for driving		MCL401	FTP-627CU301R
		MCL601	FTP-627CU601R
Interface board for Mech/ Cutter	Cutter supported	MCL401	FTP-627DSL291R Parallel (Centronics) /Serial (RS-232C)
		MCL411	FTP-627DSL401R (RS-232C/ USB) FTP-627DSL403R (USB Ver. 2.0) FTP-627DSL405R High-speed Serial (RS-232C)
		MCL601	FTP-627DSL601R, Medium-speed Serial (RS-232C) / USB
		MCL401	FTP-627DSL603R (USB Ver. 1.1)
			FTP-627DSL605R, Medium-speed Serial (RS-232C)
		MCL601	FTP-627DSL613R (USB Ver. 1.1) FTP-627DSL615R, Medium-speed Serial (RS-232C)
Interface cables	Parallel (Centronics)		FTP-628Y202
	Serial (RS232C)		FTP-628Y302
	USB		FTP-629Y301
Power cables	Logic		FTP-629Y401
	Head, motor		FTP-629Y601

## ■ SPECIFICATIONS

Item			Specifications
Part number			FTP-627MCL401/411/601
Printing method			Thermal-line dot method
Dot structure			432 dots/line
Dot pitch (horizontal)			0.125 mm (8dots/mm) - dot density
Dot pitch (vertical)			0.125 mm (8dots/mm) - line feed pitch
Effective printing area			54 mm
Number of columns			ANK 36 columns/line (max. 12/24 dot font)
Paper width			58 mm
Paper thickness			60 to 85μm (some paper in this range maby not be used because of paper characteristics)
Printing speed	MCL401		Maximum 100mm/sec. (800dot line/sec.)
	MCL411		Maximum 200mm/sec. (1,600dot line/sec.)
	MCL601		Maximum 150mm/sec. (1,200dot line/sec.)
Character types			Alphanumeric, kana: 159 types International characters: 195 type JIS Kanji (Kanji CG loaded board): about 6800 types
Character, dimensions, (WxH), number of columns			12 × 24 dots, (1.5 × 3.0 mm), 36 columns: ANK 24 × 24 dots, (3.0 × 3.0 mm), 18 columns: ANK 8 × 16 dots, (1.0 × 2.0 mm), 54 columns: ANK 16 × 16 dots, (2.0 × 2.0 mm), 27 columns: ANK

## ■ SPECIFICATIONS

Item			Specification	
Interface			Conforms to RS232C/Centronics / USB	
Power supply	For print head	MCL401 MCL411	24 VDC average current, 0.5A (0.9 A peak) (print ratio: 12.5%, print speed 100mm/sec.)	
		MCL601	24 VDC average current 1.0 A (1.9 A peak)	
	For motor	MCL401/411	24 VDC ±5%, 1 A maximum	
		MCL601	24 VDC ±5%, 1.1 A maximum	
	For cutter	MCL401	24 VDC ±5%, 1 A maximum	
		MCL411/601	24 VDC ±5%, 1.3 A maximum	
	For logic	MCL401/601	3.3 to 5.25 VDC, 0.1 A maximum	
		MCL411	2.7 to 5.25 VDC, 0.1 A maximum	
Dimensions	Mechanism with cutter		82.5 x 42.2 x 21.8 mm (WxDxH)	
	Interface board	DSL291	70 x 60 x 12 mm (WxDxH)	
		DSL4xx	96 x 52 x 21.2mm (WxDxH)	
		DSL6xx	95 x 70 x 21.6 mm (WxDxH)	
Weight	Mechanism with cutter		Approximately 97-107g	
	Interface board		Approximately 50g	
Life	Head	MCL401	Pulse resistance: 50 million pulses/dot (print ratio: 25%).	
		MCL411	Pulse resistance: 150 million pulses/dot (print ratio: 25%).	
		MCL601	Pulse resistance: 100 million pulses/dot (print ratio: 25%).	
		MCL401	Abrasion resistance: paper traveling distance 50km	
		MCL411	Abrasion resistance: paper traveling distance 150km	
		MCL601	Abrasion resistance: paper traveling distance 100km	
	Cutter	MCL401	500,000 cuts	
		MCL411	500,000 cuts	
		MCL601	1,000,000 cuts	
	Platen		5,000 times (open/close)	
Operating environment	Operating temperature*		0°C to +50°C	
	Operating humidity		20 to 85% RH (no condensation)	
	Storage temperature		-20°C to +60°C (paper not included)	
	Storage humidity		5 to 95% RH (no condensation)	
Detection function	Head temperature detection		Detected by thermistor	
	Paper out/mark detection		Detected by photo-interruptor	
	Platen release		Detected by sliding switch	
Recommended thermal sensitive paper			High sensitive paper	TF50KS-E4 (Nippon paper)
			Standard paper	TF60KS-E (Nippon paper), FTP-020PU001 (58mm), PD150R (Oji paper), FTP-020PU701 (58mm)
			Medium life storage paper	TF60KS-F1 (Nippon paper), FTP-020P0102 (58mm), PD170R (Oji paper), P220VBB-1 (Mitsubishi paper)
			Long life storage paper	PD160R (Oji paper), AFP-235 (Mitsubishi paper), TP50KJ-R (Nippon paper), HA220AA (Nippon paper)


\*+5°C to +40°C printing density assurance range.

## ■ FUNCTION OF INTERFACE BOARD

	Item		Item
1.	Test print function	8.	Cutter trouble detect
2.	Paper out detection	9.	Motor power saving function
3.	Paper near end detection	10.	Mark detection function
4.	Platen open detection	11.	MCU operation abnormality detection
5.	Thermal head temperature abnormality detection	12.	Power ON/OFF sequence protection
6.	Blow-out fuse detection	13.	Motor over-current protection
7.	Head voltage abnormality detection	14.	Hardware timer

## ■ DIMENSIONS

### 1. Printer mechanism

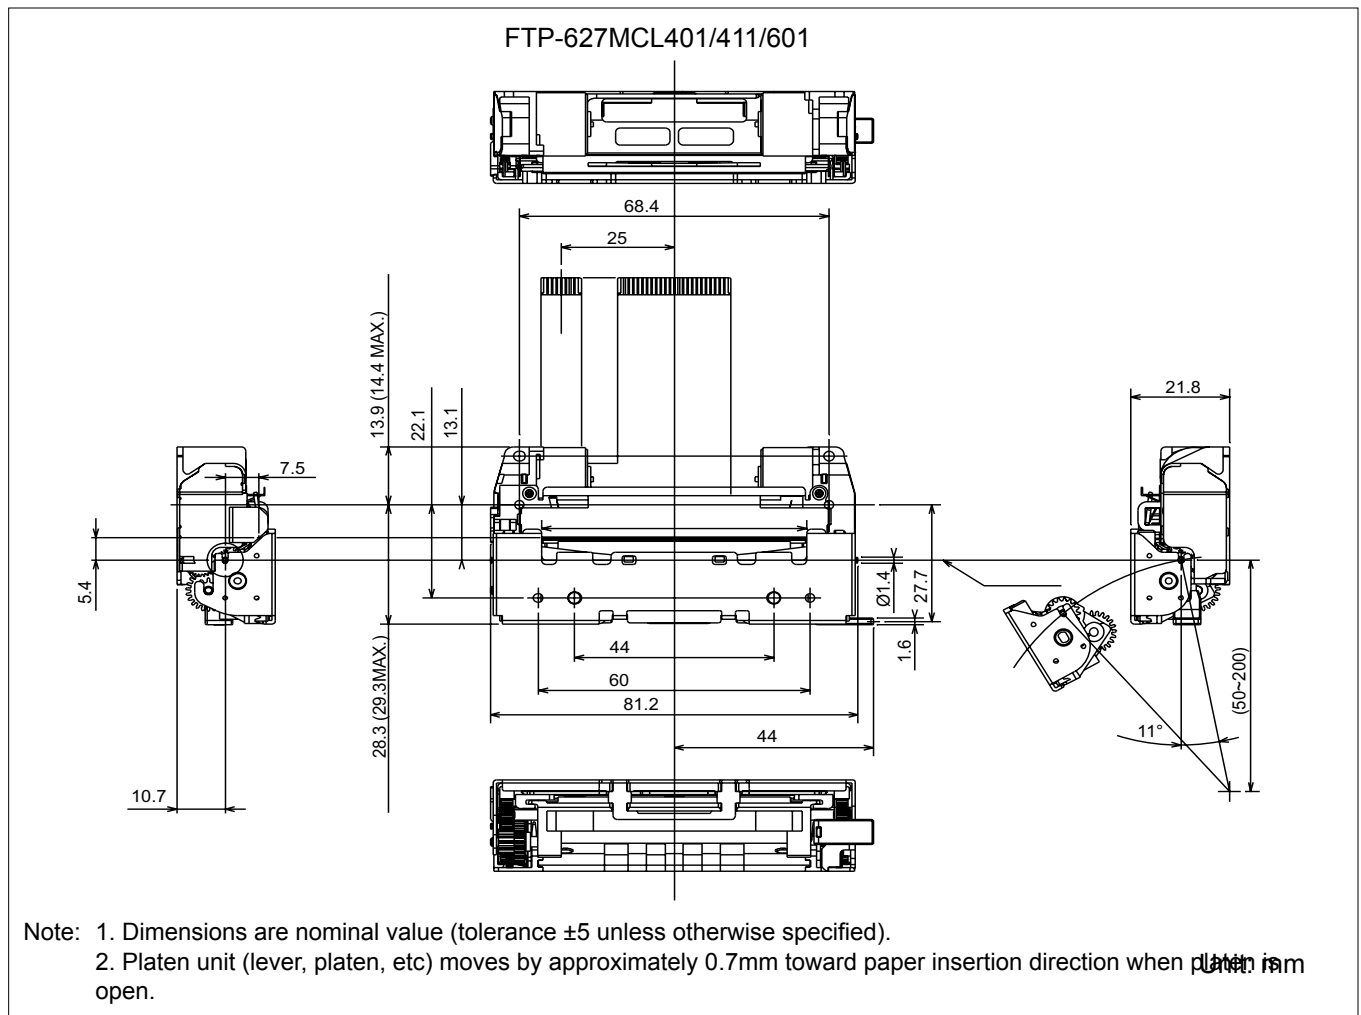

## FTP-627MCL401/411

### 1. Connector (FPC) specification (CN3/CN10)

#### (1) Connector

Mechanical unit side: FPC connector

Remote side (housing site): 52610-2471 (made by Molex)

#### (2) Pin assignment on the mechanical side

No	Signal	I/O	Contents
1	PHK	—	Photointerrupter (Cathode)
2	VSEN	I	Ground power supply for paper sensor
3	PHE	O	Photointerrupter (Emitter)
4	VH	I	Head drive power
5	DI	I	Data input
6	$\overline{\text{STB2}}$	I	Print enable signal 2
7	$\overline{\text{STB3}}$	I	Print enable signal 3
8	VDD	I	Logic Power
9	GND	—	Head ground
10	GND	—	Head ground
11	GND	—	Head ground
12	TH	O	Thermistor
13	$\overline{\text{STB1}}$	I	Print enable signal 1
14	$\overline{\text{LAT}}$	I	Data Latch
15	CLK	I	Clock
16	VH	I	Head drive power
17	VH	I	Head drive power
18	SW	—	Platen open switch
19	SW	—	Platen open switch
20	MT A	I	Motor excite signal A
21	$\overline{\text{MT A}}$	I	Motor excite signal $\overline{\text{A}}$
22	MT B	I	Motor excite signal B
23	$\overline{\text{MT B}}$	I	Motor excite signal $\overline{\text{B}}$
24	NC	—	Not connected

**FTP-627MCL601****1. Connector (FPC) specification (CN4)**


## (1) Connector

Mechanical unit side: FPC connector

Remote side (housing site): 52610-3071 (made by Molex)

## (2) Pin assignment on the mechanical side

No.	Symbol	Signal Name
1	PHK	Cathode for photo interrupter
2	VSEN	Paper sensor power
3	PHE	Emitter for photo interrupter
4	VH	Head drive power
5	VH	Head drive power
6	VH	Head drive power
7	DI	Data in
8	$\overline{\text{STB2}}$	Strobe 2
9	$\overline{\text{STB3}}$	Strobe 3
10	Vdd	Logic power
11	GND	Head ground
12	GND	Head ground
13	GND	Head ground
14	GND	Head ground
15	GND	Head ground
16	GND	Head ground
17	TM	Thermistor
18	NC	NC
19	$\overline{\text{STB1}}$	Strobe 1
20	$\overline{\text{LAT}}$	Data latch
21	CLK	Clock
22	VH	Head drive power
23	VH	Head drive power
24	VH	Head drive power
25	SW	Platen switch
26	SW	Platen switch
27	MT $\overline{\text{A}}$	Excitation signal $\overline{\text{A}}$
28	MT A	Excitation signal A
29	MT $\overline{\text{B}}$	Excitation signal $\overline{\text{B}}$
30	MT B	Excitation signal B

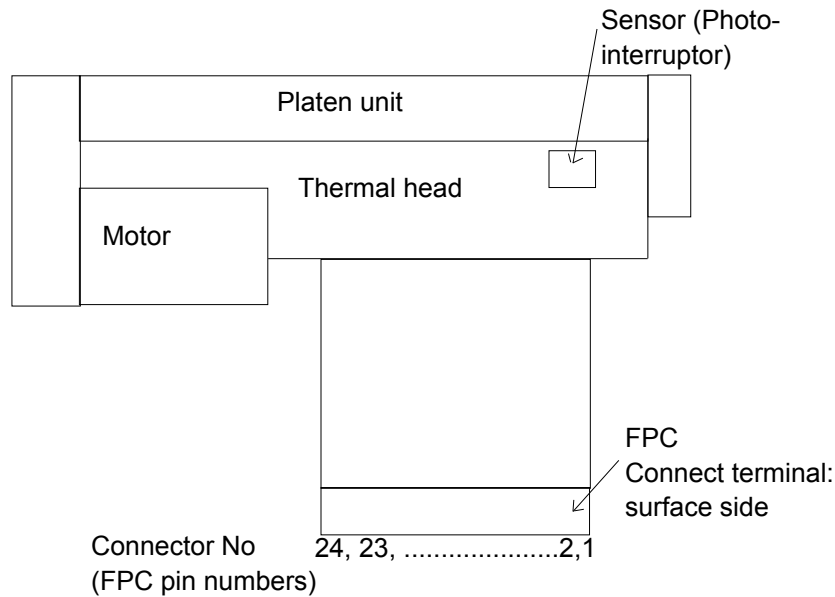

## 2. Cutter (CN4/CN5)

Connector on control circuit side: 52610-0871 Molex or equivalent

No.	Signal	I/O	Contents	No.	Signal	I/O	Contents
1	VSEN	I	Paper sensor power	2	PHE	O	Photo interruptor (emitter)
3	PHK	O	Photo interruptor (cathode)	4	MT A	I	Motor excite signal A
5	MT $\bar{A}$	I	Motor excite signal A	6	MT B	I	Motor excite signal B
7	MT $\bar{B}$	I	Motor excite signal B	8	NC	—	Not connected

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
 Gotanda-Chuo Building  
 3-5, Higashigotanda 2-chome, Shinagawa-ku  
 Tokyo 141 8630, Japan  
 Tel: (81-3) 5449-7010  
 Fax: (81-3) 5449-2626  
 Email: [promothq@fcl.fujitsu.com](mailto:promothq@fcl.fujitsu.com)  
 Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
 250 E. Caribbean Drive  
 Sunnyvale, CA 94089 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
 Web: <http://us.fujitsu.com/components/>

### Europe

Fujitsu Components Europe B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910  
 Fax: (31-23) 5560950  
 Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
 Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex  
 Singapore 118529  
 Tel: (65) 6375-8560  
 Fax: (65) 6273-3021  
 Email: [fcac@fcal.fujitsu.com](mailto:fcac@fcal.fujitsu.com)  
 Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2013 Fujitsu Components America, Inc. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice.  
 Rev. May 20, 2013.