=== 自我測試 ===

按鍵	功　能
字體	回到主功能表
內碼	暫停／繼續列印
速度	改變列印速度
連線	回到連線狀態

1. Software specification

   WL03800-J101 (11K)

2. Emulations

   ESC/P --- EPSON xxxxC Emulation Ver. 2.01
   DPL24C+ --- FUJITSU DPL24C PLUS Ver. 2.01

3. Repeat printing

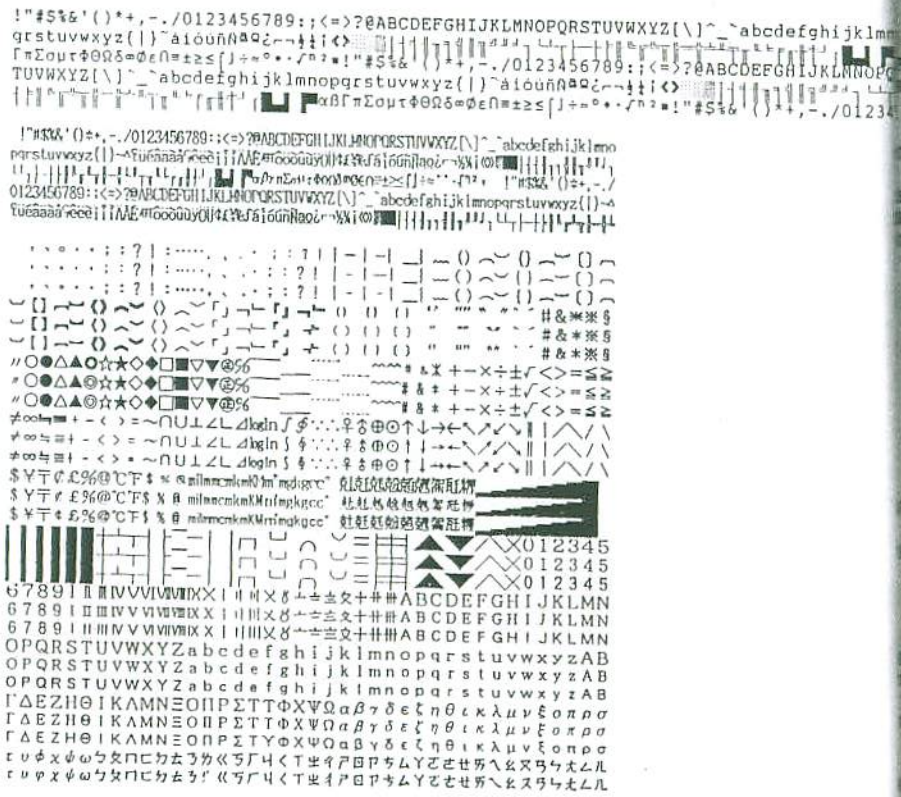

自我測試樣本

5. 要離開自我測試，按〞連線〞鍵。印表機會回復至正常連線狀態。

注意

印表機可列印一特殊的〞展示圖樣〞顯示印表機的某些能力。要列印展示圖樣時，依下列步驟：

1. 載入文書或A4尺寸的單張紙張。
2. 關閉印表機。
3. 按〞內碼〞鍵，再次打開電源，印表機將開始列印展示圖樣。
4. 要停止列印，按〞連線〞鍵，要再次開始列印，再次按〞連線〞鍵。
5. 要離開展示模式，關閉印表機。

==== PRINTER FUNCTION SPECIFICATION ====

Printing technology:	24 wire dot matrix, Logic seeking
Resolution:	Letter quality - 360 X 180 dots/inch Draft quality - 120 X 180 dots/inch High speed draft - 90 X 180 dots/inch
Color (Option):	7 colors Black,Magenta,Cyan, Violet,Yellow,Orange, and Green
Standard command set:	Epson ESC/P LQxxxxC Version 2.01
Resident emulations:	Fujitsu DPL24C PLUS Emulation
Character sets:	IBM PC char.sets 1 and 2 IBM PS/2 char.sets (Codepage 437,850,851, 852,855,860,863,865,866) ISO8859-1/ECMA 94 National character sets (USA,UK,German, French,Italian,Spanish,Swedish,Finnish, Norwegian,Danish 1 and 2,Hungarian 1 and 2, Slovak 1 and 2,Mazowia 1 and 2,Polish 1 and 2, Latin7,Latin2 1 and 2,Latin P,ISO-Latin, Kamenicky 1 and 2,Turkish 1 and 2,ELOT928, Cyrillic,Lithuanian 1 and 2,Mik,and Macedonian) 664 characters per font
Print functions:	See below.

Fonts - <Bitmap> Courier 10, Pica 10, Prestige 12, Boldface PS Compression 17, Correspondence 10, Draft 12, HI-Draft 12 OCR-B 10

Bold printing Shadow printing *Italic printing* Underline
Underlined Superscript Subscript

Double width Double height Double W & H

Bar code print: Codabar,EAN8,EAN13, Code 3 of 9, Industrial 2 of 5, Interleaved 2 of 5, Matrix 2 of 5, UPC type A

EAN example: 1234 5670

展示圖樣