
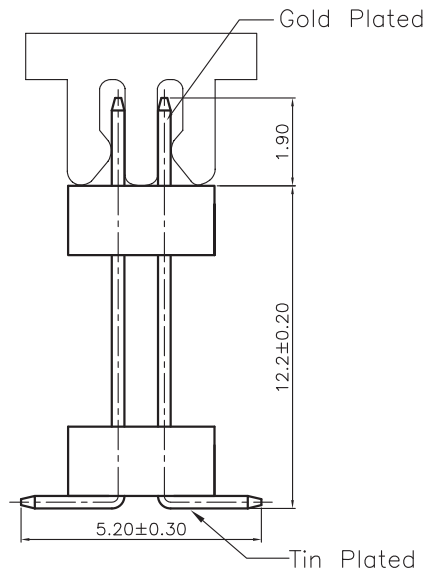
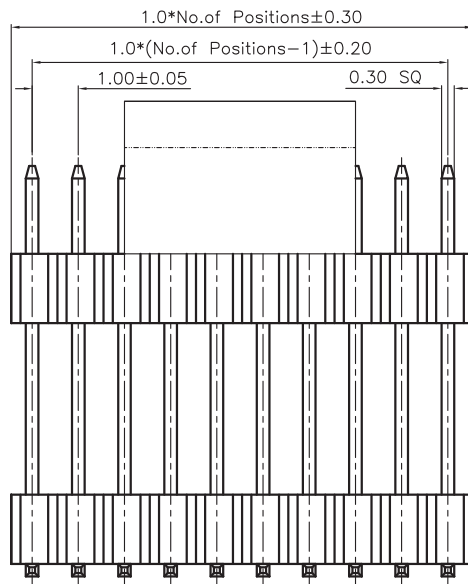


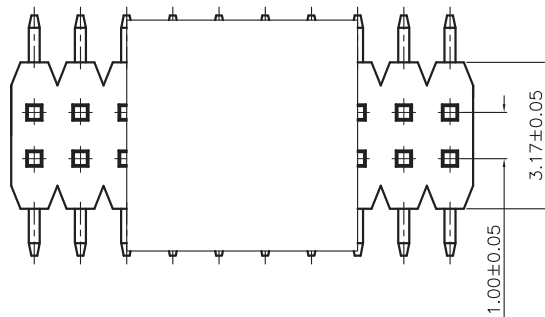

Specifications:

Current Rating:1.0A AC/DC

Voltage Rating:50V AC/DC

Contact Resistance:20m ohm. max.

Insulation Resistance:1,000M ohm. min.

Withstanding Voltage:500V For One Minute

Operating Temperature Range:-25°C ~ +105°C

Material and Finish

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)

Insulator Color:Black

Contact:Copper Alloy

Plated:Gold Plated

How To Order

2191SMDI-XXX-19122-CP

With Cap
Length


G:Gold Plated

SG:Selective Gold Plated

T:Tin Plated

No.of Positions

SMD Type&Double Insulator

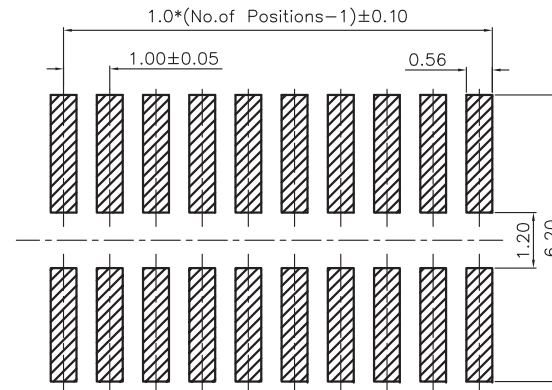

PCB Layout
(PCB Tolerance ±0.05)

RoHS Compliant

				DRAWN:	GENERAL TOLERANCE:	 繼德工業股份有限公司 Neltron Industrial Co., Ltd.		D
E				Jun Fang	.X=±0.25 .XX=±0.20			
D				CHECKED:		DESCRIPTION: 1.0mm Pin Header Double Row SMD Type		
C				Jeremy Liu	UNIT: mm			
B				APPROVAL:	SCALE:	PART NO: 2191SMDI-XXX-19122-CP		
A	16-Sep-2009	(PC0001)	Jun Fang		SHEET: 1 / 1			
REV	DATE	FILE	BY	Mike Wu	PROJECTION: 