

■ General Specifications

Description			ScanSnap S1100i
Scanner type			CDF (Continuous Document Feeding), Simplex sheetfeed two-way paper path (Straight path, U-turn path)
Scanning modes			Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)
Image sensor			CIS (Contact Image Sensor) x 1
Light source			3 Color LED (Red / Green / Blue)
Optical resolution			600 dpi
Scanning speed (A4 portrait) *1	USB bus powered	Auto mode (default) *2	7.5 seconds / page
		Normal mode (150 dpi)	
		Better mode (200 dpi)	
		Best mode (300 dpi)	
		Excellent mode (600 dpi)	35 seconds / page
Document size		Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 25.4 x 25.4 mm (1 x 1 in.)) / Automatically recognizes document size
		Normal mode with Carrier Sheet	Use of a carrier sheet permits the scanning of A3, B4, 11 x 17 in. and photographs as well as the document sizes that are listed above
		Long paper scanning *3	Max: 216 x 863 mm (8.5 x 34 in.) (300 dpi or less)
Paper weight (Thickness)			● 52 to 209 g/m², or 14 to 56 lb (Straight path) ● 52 to 80 g/m², or 14 to 20 lb (U-turn path) ● Card Portrait or Landscape (Straight Path) Non-embossed: 0.76 mm or less Embossed: 0.76 + 0.48 mm (ISO7810 Conforming)
Paper setting			Front side up
Interface *4			USB 2.0 (USB 1.1 compatible)
Power requirement			5 V / 0.5 A (x 1port)
Power consumption			During operation: 2.5 W or less, During sleep mode: 1W or less During Auto Standby (OFF) mode: Less than 0.5 W
Operation environment			Temperature: 5 to 35° C (41 to 95° F) Relative humidity: 20 to 80% (Non-condensing)
Dimensions (W x D x H) *5			273 x 47.5 x 34 mm (10.74 x 1.87 x 1.33 in.)
Device weight			350 g (0.77 lb)
Environmental compliance			ENERGY STAR® / RoHS
Multifeed detection			None
Driver			ScanSnap specific driver ● Windows®: Does not support TWAIN / ISIS™ ● Mac OS: Does not support TWAIN

\*1 Scanning speeds may vary due to the system environment used. Scanning speed means the time from “Start feeding document” to “Finish output document” after pre-pick and pushing Scan button. In case of “From pushing Scan button”, Warm-up time is added. ● Warm-up time: Less than 2 seconds from ready status (Less than 3 seconds after opening chute cover) \*2 Documents measuring approximately 148 mm in length or less are scanned in “Best mode”, while other documents are scanned in “Better mode”. \*3 The S1100i is capable of scanning documents that exceed A4 size in length. This function is available for all modes except “Excellent mode”. \*4 Computer with USB 3.0 will work as USB 2.0 guaranteed only with USB cable provided with product. \*5 When the paper output guide is in the folded position.

■ Software

	Windows®	Mac OS
Driver *1	ScanSnap Manager V6.3	ScanSnap Manager V6.3
	ScanSnap Organizer V5.2	ScanSnap Organizer V1.1
	CardMinder™ V5.2	CardMinder™ V5.2
	ABBYY FineReader for ScanSnap™ 5.0	ABBYY FineReader for ScanSnap™ 5.0
	Scan to Microsoft® SharePoint® 3.4 Scan to Microsoft® SharePoint® 5.0	-

\*1 TWAIN or ISIS™ applications cannot be used directly.

■ Included items

● Safety Precautions	● Setup DVD-ROM	● USB cable (2.0 m)
----------------------	-----------------	---------------------

■ Consumables

Description	Part number	Remarks
Cleaner F1	PA03950-0352	100 ml bottle Used to clean rollers
Cleaning Wipe	PA03950-0419	1 pack (24 sheets) Used to clean rollers

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

\*ABBYY and FineReader are trademarks of ABBYY Software, Ltd. which may be registered in some jurisdictions. ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY. \*Evmote is a registered trademark or trademark of Evmote Corporation. \*Google, Google Docs, Android and Google Play are registered trademarks or trademarks of Google Inc. \*Intel, Pentium, and Intel Core are registered trademarks or trademarks of Intel Corporation in the United States and other countries. \*ISIS™ is a registered trademark of EMC Corporation in the United States. \*Mac, Mac OS, OS X, iPad, iPhone and App Store are trademarks of Apple Inc. \*Microsoft, Windows, Windows Vista, Excel, PowerPoint, SharePoint and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. \*Word is the product of Microsoft Corporation in the United States. \*Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com, inc. in the United States and other countries. \*ScanSnap, ScanSnap logo, ScanSnap Manager, ScanSnap Organizer and CardMinder are registered trademarks or trademarks of PFU LIMITED in Japan. \*Wi-Fi and Wi-Fi Protected Setup are trademarks of Wi-Fi Alliance. \*Other company names and product names are the registered trademarks or trademarks of the respective companies.

Visit the ScanSnap homepage for additional information : <http://scansnap.fujitsu.com/>

⚠ Safety Precautions		
Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.	Do not place this device in wet or oily areas; or subject it to environments high in dust or moisture. Doing so may result in electrical shock, fire, or product damage.	

Specifications are subject to change without notice.

■ ScanSnap S1100i System Requirements

● Windows®

Compatible operating systems		Windows® 8 / 8.1 (32-bit / 64-bit)	Windows® 7 (32-bit / 64-bit) *1	Windows Vista® (32-bit / 64-bit) *2
Driver / Applications *3	ScanSnap Manager V6.3	Supported	Supported	Supported
	ScanSnap Organizer V5.2	Supported	Supported	Supported
	CardMinder™ V5.2	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported
	Scan to Microsoft® SharePoint® 3.4 Scan to Microsoft® SharePoint® 5.0	Supported	Supported	Supported
Hardware requirements *4	CPU *5	Intel® Core™ i5 2.5 GHz or higher		
	Memory capacity *5	4 GB or more		
	Display	1,024 x 768 pixels or higher	800 x 600 pixels or higher	
	Disk capacity *6	2,690 MB or more of free hard disk space		
	DVD-ROM drive	Required for installation		
	USB port *5 *7	USB2.0 / USB1.1		

\*1 Service Pack 1 or later required. \*2 Service Pack 2 or later required. \*3 For the latest support information, visit the ScanSnap homepage. \*4 The ScanSnap device may not work if the connected computer does not meet this requirement. \*5 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. \*6 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. \*7 When the ScanSnap is connected to a USB 3.0 port, the port operates as a USB 2.0 port. \* System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

● Mac OS

Compatible operating systems		OS X v10.9 *1	OS X v10.8 *2	Mac OS X v10.7 *3
Driver / Applications *4	ScanSnap Manager V6.3	Supported	Supported	Supported
	ScanSnap Organizer V1.1	Supported	Supported	Supported
	CardMinder™ V5.2	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 5.0	Supported	Supported	Supported
Hardware requirements *5	CPU *6	Intel® Core™ i5 2.5 GHz or higher		
	Memory capacity *6	4 GB or more		
	Display	1,024 x 768 pixels or higher		
	Disk capacity	1,930 MB or more of free hard disk space		
	DVD-ROM drive	Required for installation		
	USB port *6 *7	USB2.0 / USB1.1		

\*1 OS X v10.9.1 or later recommended. \*2 OS X v10.8.5 recommended. \*3 Mac OS X v10.7.5 recommended. \*4 For the latest support information, visit the ScanSnap homepage. \*5 The ScanSnap device may not work if the connected computer does not meet this requirement. \*6 Scanning speeds may drop if recommended CPU, memory capacity and USB1.1 requirements are not met. \*7 When the ScanSnap is connected to a USB 3.0 port, the port operates as a USB 2.0 port. \* System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■ Options

Description	Part number	Remarks
ScanSnap S1100 Case *1	PA03610-0001	Intended for ScanSnap S1100i and included items
ScanSnap Carrier Sheets *2	PA03360-0013	5 Carrier Sheets Intended for ScanSnap iX500, iX100, S1500, S1500M, S1100i, S1100

\*1 This product has been especially designed for storing and carrying ScanSnap S1100i. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure. \*2 Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m² or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

FUJITSU

ScanSnap  
S1100i



Enhanced with new features

- ▶ Seamlessly sync to iPad/iPhone and Android™ devices
- ▶ Easily link to cloud services and more from Quick Menu
- ▶ Link from an open software or cloud application\* with ScanSnap Folder

\* The application must support PDF and JPEG files.

Bundle Software

- ▶ CardMinder™ (Win / Mac)

Simple, Speedy & Compact.  
From Paper to PDF in One Touch!



shaping tomorrow with you



# ScanSnap S1100i

## Bring simple "One Touch" scanning to new places! Discover new levels of productivity!



### Speedy "One Touch" scanning

The S1100i delivers a snappy 7.5 seconds/page (approximately 8 ppm) scanning speed for color A4 documents at resolutions up to 300 dpi.\*

\* The time for scanning speed was measured from the point a page first enters to the point it fully exits the scanner.

### One of the smallest mobile A4 scanners in the world \*1

The ScanSnap S1100i document scanner pushes the limits of size for extreme portability while delivering smooth A4 size document scanning\*2. All you need is your laptop and one USB cable to scan and share your documents anywhere, anytime.



\*1 This statement was true based on comparisons of A4 document feed type scanners.  
\*2 The S1100i measures approximately 1/4 the size and less than 1/4 the weight when compared to the ScanSnap S1300i.

### Scans plastic cards and other various document types\*

In addition to standard paper types, the S1100i can scan plastic cards like the ones used for membership IDs.

\* Card type ISO 7810, ID-1 format = 86 x 54 mm (supports embossed cards)



### Continuous Document Feeding (CDF Function)

Even though the S1100i is one of the world's smallest document-feed scanners, you can smoothly scan multiple page documents with remarkable speed. The Continuous Document Feeding function allows you to insert pages one after another without any extra button pressing by detecting when a sheet enters and exits the S1100i.

#### ● Scanning a two-sided document using the CDF Function



### Dual scan - scanning 2 small sized documents at the same time

With this new feature, you can scan 2 small sized documents such as business card and receipt at the same time. Simply insert documents continuously to the paper feeding entry to greatly reduce your scanning time and lead to increased efficiency.




### Two selectable paper paths

Switch S1100i's paper output guide to either the folded position for the straight path or the open position for the U-turn path to best suit the document you want to scan.

#### ● Straight path


Most suitable for scanning post cards, photos, business cards, plastic cards\*, ScanSnap Carrier Sheet (Option), and common office paper.

\* This applies to standard ISO 7810 ID-1 card types.



#### ● U-turn path


Most suitable for scanning common office paper and you do not need extra space for the document output.



### Scans to a greater range of mobile devices

Like all scanners of the ScanSnap series, the S1100i supports wireless scanning to an iOS or Android mobile device or tablet for convenient mobile viewing the mobile app ScanSnap Connect Application.

\* To use the latest ScanSnap functions, download and apply the most recent software update.  
\* ScanSnap Connect Application is available as a free download from the official application distribution service of the device (e.g., Google Play and Apple App Store). The Wi-Fi of the ScanSnap installed computer must be turned on to use this feature.

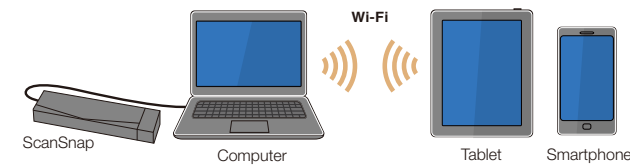

### Fast and flexible application of scanned data with Quick Menu

After scanning is complete, the Quick Menu appears. Navigate through the Quick Menu's easy to use interface to smoothly send your digitized document to an application of your choice.

\* To use the latest ScanSnap functions, download and apply the most recent software update.

#### ScanSnap Manager V6.3 [ Windows® ]

#### ScanSnap Manager V6.3 [ Mac OS ]



#### Quick Menu (Mac OS)



### Automated features for near effortless scanning


The S1100i features a powerful set of automated image processing functions including Auto deskew, Auto orientation, and Auto color detection. These functions make pre-scan work like sorting pages and changing scan settings unnecessary, so you can scan your documents with minimal effort.

### Easily links documents to clouds

You can scan nearly effortlessly to Evernote, Google Docs, Salesforce, SugarSync and Dropbox, and then conveniently browse the data from computers, tablets or smartphones - anywhere, anytime.

#### ● Introducing ScanSnap Folder [ Windows® ]

ScanSnap folder is created in the Windows OS, so you can scan directly to the ScanSnap folder when you select ScanSnap folder in the file attachment selection dialog. In this way, you do not have to save the data in the computer beforehand and the operation is smooth and effective.

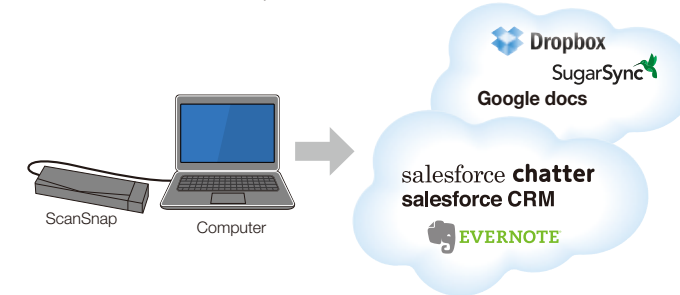

### Efficiently organize data from scanned business cards

Business card organizer software

#### CardMinder™ V5.2 [ Windows® ]

#### CardMinder™ V5.2 [ Mac OS ]

- Scan your collection of business cards into easy to navigate digital business card holders.
- Import the data from your scanned business cards into Excel, Outlook, Address Book (Mac OS) and other database programs for fast referencing and application.



CardMinder™ V5.2

### Generates Microsoft® Word, Excel®, PowerPoint® files

Top-class OCR engine

#### ABBYY FineReader for ScanSnap™ 5.0 [ Windows® ]

#### ABBYY FineReader for ScanSnap™ 5.0 [ Mac OS ]

Smoothly scan and convert paper documents into Word, Excel® and PowerPoint® documents.

\* Only Microsoft® Word and Excel® are available for Mac OS.  
\* Generated images and text may vary from the original.

#### ScanSnap S1100i Case (Option)

A convenient carrying case intended for the S1100i is available.  
(See disclaimer under "Options" in the next page)

