

ScanSnap S1500M






Color Image Scanner

ScanSnap

Compact Color Duplex Scanner for Mac OS



Scan

-  One button searchable PDF creation
-  Intelligent paper feed detection
-  Blazing 20ppm color scanning
-  50-page Automatic Document Feeder (ADF)
-  Comes with Adobe® Acrobat® 9 Professional




FUJITSU

Easily transform paper with the touch of one button


Organizing with the ScanSnap S1500M happens at the touch of a single button. All this intelligent technology working behind the scene ensures your PDF or JPEG files look their best automatically.



Blank Page Detection

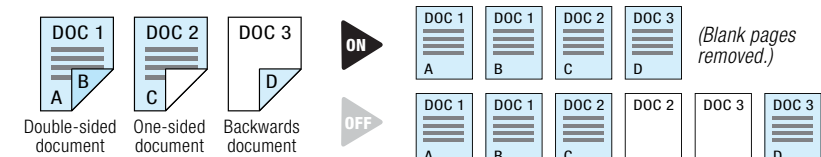


Intelligent Auto Color Detection

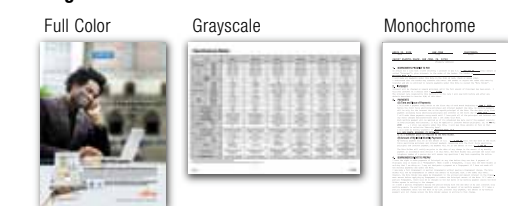

If the ScanSnap detects color, grayscale or monochrome it scans accordingly keeping file sizes to a minimum.

Auto-Size Detection

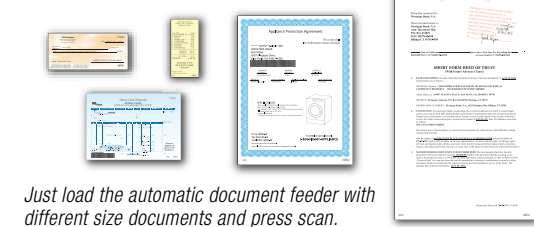

Just load the automatic document feeder with different size documents and press scan.





ScanSnap complements any setting, whether resting elegantly on the desk at home or serving dutifully in the corporate office.

Fast scanning

Simply load a stack of documents into the automatic document feeder and press the "Scan" button. Capable of holding up to 50 pages in the feeder, ScanSnap S1500M scans both sides simultaneously at a speed of up to 20 pages per minute.

Auto Deskew and Auto Orientation

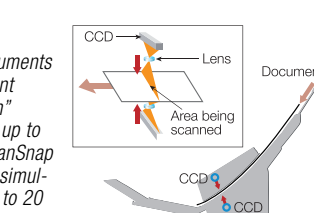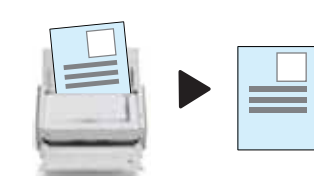

The ScanSnap S1500M provides Mac users an effective way to greatly reduce paper clutter, storage space, and security risk associated with unmanaged paperwork at home or office. Even better, documents scanned

by ScanSnap take on a higher level of accessibility and usefulness once liberated into the digital realm. Find out how others are freeing up time, space and even money. Visit <http://us.fujitsu.com/scansnap>.

You can scan practically anything.

Automatic features make ScanSnap the quickest and easiest to use scanner ever.




Reduce paper clutter and make documents more useful and secure.

Scan business cards to large A3 documents




ScanSnap Carrier Sheets

The included carrier sheet allows ScanSnap S1500M the flexibility to digitize large double-letter size documents (A3/B4), photographs, as well as magazine and newspaper clippings. Carrier sheets can be scanned in succession or mixed in with paper documents.

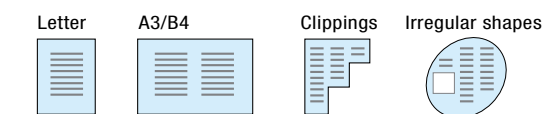

Intelligent Paper Feed Detection

ScanSnap S1500M is equipped with an ultrasonic multi-feed sensor to ensure documents are scanned as intended and data is not lost.

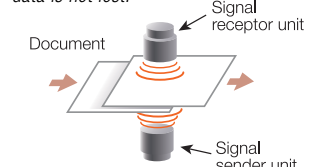

NEW Link ScanSnap to iPad & iPhone devices
Scan content – papers, photos, magazine clippings and more – directly to your iPad/iPhone device for viewing on the go using the ScanSnap Connect Application, free from the Apple App Store.

- The ScanSnap connected computer must be running Mac OS X v10.4 or later.
- This application must be installed on iPad/iPhone devices running iOS 4.2.1 or later.
- Only one iPad/iPhone device at a time can sync to the ScanSnap connected PC.

Now Better armed for the cloud era

Like all current ScanSnap models, the S1500M can link to cloud services *Evernote*, *Google Docs™*, *Salesforce CRM* and *SharePoint Online* (for Windows®).

Plus two additional cloud syncing functions:

NEW Scan to Salesforce Chatter

Scan various documents to the online collaboration tool *Salesforce Chatter* (business cards to *Salesforce CRM*) and see data sharing, communication and productivity in your business soar.

NEW Scan to SugarSync

Stay connected to all your documents anywhere you go by scanning them to *SugarSync*, one of today's premier online backup services.

Quick Menu provides ad-hoc flexibility

Operators can quickly access all the powerful features of ScanSnap from the centralized Quick Menu. Just scan and choose a function to quickly transition from one scanning intention to another. *Quick Menu for Mac OS shown

ScanSnap Quick Menu



Bundled Software



ABBYY FineReader OCR

ABBYY FineReader for ScanSnap™ 4.0 Mac Edition creates Microsoft® Word and Excel® files

With ScanSnap S1500M, users can create editable documents by scanning directly into Word and Excel at the touch of a button.



* Generated images and text may vary from the original.



Adobe® Acrobat® 9 Professional

Adobe® Acrobat® 9 Professional creates Searchable and Editable PDF files

- With Adobe® Acrobat® 9 Professional for Mac, users can move beyond merely "seeing" and "printing" PDF documents to searching and editing them however they like.
- Adobe® Acrobat® 9 Professional for Mac supports password protection and digital ID creation, ideal for safeguarding personal and confidential information on PDF files.



Cardiris™ 3.6 for ScanSnap

Cardiris™ 3.6 for ScanSnap efficiently organizes business card information

- ScanSnap S1500M quickly scans loads of business cards, captures both sides simultaneously, extracts the contact information, and places it into editable fields.
- Cardiris can export contact data into Address Book and other databases.

General Technical Specifications

Product Name / Part Number		ScanSnap S1500M / PA03586-B105
Scanner Type		Automatic Document Feeder (ADF), Duplex Scanning
Scanning Modes		Color, Grayscale, Monochrome, Automatic (color / grayscale / monochrome detection)
Image Sensor		CCD (Charge coupled device) x 2 (front / back)
Light Source		White cold cathode discharge lamp
Optical Resolution		600 x 600 dots per inch (dpi)
Scanning Speed ¹ (A4 portrait)	Auto Mode ²	Simplex or Duplex, 20 pages per minute (ppm)
	Normal Mode	Color & Grayscale 150 dpi, Monochrome 300 dpi, Simplex/Duplex, 20 ppm
	Better Mode	Color & Grayscale 200 dpi, Monochrome 400 dpi, Simplex/Duplex, 20 ppm
	Best Mode	Color & Grayscale 300 dpi, Monochrome 600 dpi, Simplex/Duplex, 20 ppm
	Excellent Mode ³	Color & Grayscale 600 dpi, Monochrome 1200 dpi, Simplex/Duplex, 5 ppm
Document size	Normal Mode without Carrier Sheet	A4, A5, A6, B5, B6, Business Card, Letter, Legal and Custom Size. Max: 8.5 X 14.17 in. (216 X 360 mm), Min: 2 X 2 in. (50.8 X 50.8 mm). Automatically recognizes document size.
	Normal Mode with Carrier Sheet	Use of a Carrier Sheet permits the scanning of A3, B4, Double-Letter and photographs as well as the document sizes listed above.
	Long Paper Scanning ⁴	34 inches in length (863 mm)
Multi-feed Detection		Ultrasonic Sensor or Length Detection (selectable)
Paper Weight (Thickness)		14 to 34 lb (52 to 127 g/m2)
Paper Chute Capacity ⁵		Maximum 50 sheets (Letter size at 20 lb or 80 g/m2)
Interface		USB 2.0 (USB 1.1 Compatible)
Power Requirement		AC 100V to 240V, 50 / 60 Hz
Power Consumption	Operating Mode	35W or less
	Standby Mode	Less than 4.5W
Operation Environment	Temperature	41°F to 95°F (5°C to 35°C)
	Relative Humidity	20% to 80% (Non-condensing)
Dimensions (W x D x H) ⁶		11.5 x 6.3 x 6.2 in. (292 x 159 x 158 mm)
Device Weight		6.62 lb (3.0 kg)
Environmental Compliance		ENERGY STAR® Compliant / RoHS ⁷
Limited Warranty		1 Year Limited Warranty. For full details, visit www.fcpa.fujitsu.com/warranties or call (800) 626-4686
Service Options		In-warranty Upgrade: Advance Exchange. Post-Warranty: Advance Exchange Plus, Depot Plus, ScanAid Kit, Cleaning and Consumable Kit. For full details on all service programs, visit www.ImagingService.com

1: Scanning speeds may vary due to the system environment used. 2: Documents measuring 5.8 inches (148 mm) in length or less are scanned in "Best Mode", while other documents are scanned in "Better Mode". 3: Excellent 1200 dpi resolution for Black & White provided by interpolation. 4: ScanSnap S1500M is capable of scanning documents that exceed A4 size in length. ScanSnap S1500M supports the scanning of longer documents in all modes except in "Excellent Mode". 5: Maximum capacity varies depending upon paper weight. 6: Excluding the stacker and other external attachments. 7: PFI limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

Software	Mac OS	Windows®
Driver ^{8,9}	ScanSnap Manager V3.2	ScanSnap Manager V5.1
Applications	—	ScanSnap Organizer V4.1
	—	CardMinder™ V4.1
	Cardiris™ V4.0 for ScanSnap	—
	Adobe® Acrobat® 9 Pro	ABBYY FineReader for ScanSnap™ 4.1
	ABBYY Fine Reader for ScanSnap™ 4.1	Scan to Microsoft® SharePoint® 3.4
	—	—
	Evernote for Mac 2.2	Evernote for Win 4.4

8: Twain or ISS applications cannot be used directly. 9: "one touch" image file JPEG, PDF and searchable PDF generation. These functions are operable with ScanSnap Manager 5.0 (ScanSnap specific driver).

Included items		
• 1 USB cable (2.0)	• 1 ScanSnap CarrierSheet	• 1 Safety Precautions
• 1 AC adapter	• 1 Adobe Acrobat DVD-ROM	• 1 Set-up DVD-ROM
• 1 AC cable	• 1 Getting Started	

Consumables

Description	Part Number	Remarks
Pad Assy	PA03586-0002	Lifetime: Every 50,000 sheets or one year. (For S1500 and S1500M only)
Pick Roller	PA03586-0001	Lifetime: Every 100,000 sheets or one year. (For S1500 and S1500M only)
Cleaner F1	PA03950-0352	100 ml bottle. (Used to clean Pad Assy and Pick roller)
Cleaning Wipe	PA03950-0419	1 package contains 24 sheets. (Used to clean Pad Assy and Pick roller)

* These recommended lifetimes are for 20 lb (90 g/m²) A4 sized documents. Therefore, appropriate replacement lifetimes may vary from other document types

Mac OS

Driver/ Application	Description	Mac OS X v10.7	Mac OS X v10.6 ¹⁰	Mac OS X v10.5 ¹¹	Mac Os X v10.4 ¹²
13, 14	ScanSnap Manager V3.2	Supported	Supported	Supported	Supported
	Cardiris V4.0 For ScanSnap	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Adobe® Acrobat® 9 Pro ¹⁵	Not Supported ¹⁶	Not Supported ¹⁶	Supported ¹⁷	Supported ¹⁸
	Evernote for Mac 2.2	Supported	Supported	Supported ¹⁹	Not Supported
Hardware Require- ments	CPU ²⁰	Intel Core 2 Duo (recommended: Intel Core 2 Duo 2.1 GHz or higher)	Intel Core 2 Duo (recommended: Intel Core 2 Duo 2.1 GHz or higher)	• PowerPC G5 1.65 GHz or higher • Intel Core Duo 1.83 GHz or higher (recommended: Intel Core 2 Duo 2.4 GHz or higher)	
	Memory Capacity ²⁰	2 GB or more	1 GB or more	512 MB or more (recommended: 1 GB or more)	
	Display	1,024 x 768 pixels or more			
	Disk Capacity	3,095 MB free hard disc for installation			
	DVD-ROM Drive	Required for installation			
	USB Port ²⁰	USB 2.0 / USB 1.1			

10: Mac OS X v10.6.6 or later recommended. 11: Mac OS X v10.5.8 recommended. 12: Mac OS X v10.4.11 recommended. 13: This product supports MAC operating systems. 14: Please refer to the ScanSnap Website for latest support information. 15: Requires Safari 3.0.4 or later. 16: The version of Adobe® Acrobat® 9 Pro must be compatible with Mac OS X v10.6 and v10.7 to run on those systems. For more information, refer to the Adobe Systems Incorporated Web site. 17: It is recommended that this scanner be used with Mac OS X v10.5, which has been updated with the latest update. 18: Requires Mac OS X v10.4.11. 19: Mac OS X 10.5.8 only. 20: Scanning speed may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Windows®

Driver/ Application <small>21, 23</small>	Description	Windows® 7 (32-bit / 64-bit)	Windows® Vista™ (32-bit / 64-bit)	Windows® XP (32-bit)	Windows® 2000 Professional
	ScanSnap Manager V5.1	Supported	Supported	Supported ²⁴	Supported ²⁵
	ScanSnap Organizer V4.1 ²²	Supported	Supported	Supported ²⁴	Supported ²⁵
	CardMinder™ v4.1 ²⁴	Supported	Supported	Supported ²⁴	Supported ²⁵
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported ²⁴	Supported ²⁵
	Scan to Microsoft® SharePoint® 3.4	Supported	Supported	Supported ²⁴	Supported ²⁵
	Evernote for Win 4.4	Supported	Supported	Supported ²⁴	Not Supported
Hardware Require- ments	CPU ²⁶	Intel Pentium® 4 1.8 GHz or higher (recommended: Intel Core 2 Duo 2.2 GHz or higher)			
	Memory Capacity ²⁶	64-bit: 2 GB or more. 32-bit: 1 GB or more	512 MB or more (recommended 1 GB or more)		
	Display	800 x 600 Pixels or more			
	Disk Capacity ²⁷	2,220 MB free hard disc space for installation			
	DVD-ROM Drive	Required for installation			
	USB Port ^{26, 28}	USB 3.0 / USB 2.0 / USB 1.1			

21: This product supports Microsoft® Windows®. 22: The Windows® Desktop search function supports Windows® 7, Windows Vista® and Windows® XP. Search functionality for Windows® 2000 Professional is only supported by Adobe® Acrobat® 7.0 and Adobe® Acrobat® 8. 23: Please refer to the ScanSnap Website for latest support information. 24: For use with Service Pack 2 or higher. Compatible with Windows® XP Professional / Home Edition. 25: For use with Service Pack 4 or higher. 26: Scanning speed may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. 27: Microsoft® .NET framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. 28: ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Options

Description	Part Number	Remarks
ScanSnap Carrier Sheets ²⁹	PA03360-0013	5 Carrier Sheets. Intended for ScanSnap S1500M S1500, S510M, S510, S500M, S500 and ScanSnap Fi-5110E0X Series Scanner.
ScanSnap Bag	PA03951-0651	Intended for ScanSnap S1500M, S1500, S510, S510, S500M, S500 and ScanSnap Fi-5110E0X series scanner and included items.

29: Although the ScanSnap Carrier Sheet has a listed lifespan of 500 scans, the lifespan may vary with usage. Scan Snap Carrier sheets are intended to scan paper documents with weight of .027 lb. (127 g/m²) or less. The ScanSnap Carrier Sheet also supports the scanning of folded documents that are larger as 8.50 x 11.69 mm.

Safety Precautions

Be sure to carefully read all safety precautions prior to using this product and use this device as described.

Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to the product.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.



Fujitsu Computer Products of America, Inc. 1250 East Arques Avenue Sunnyvale, CA 94085-4701
(800) 626-4686 (408) 746-7000 • info@fcpa.fujitsu.com • <http://us.fujitsu.com/fcpa>



© 2011 Fujitsu Computer Products of America, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks and The Possibilities are Infinite is a trademark of Fujitsu Limited. As an ENERGY STAR® Partner, Fujitsu Ltd. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a U.S. registered trademark. Microsoft and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Word and Excel are the products of Microsoft Corporation in the United States. Apple, Apple logo, Mac, Mac OS, and Photo are trademarks of Apple Inc., the Adobe logo, Acrobat and Adobe Reader are either registered trademarks or trademarks of Adobe Systems Incorporated. iScan™ is a registered trademark of EMC Corporation in the United States. Intel, Pentium, and Intel Core are either registered trademarks or trademarks of Intel Corporation in the United States and other countries. PowerPC is a trademark of International Business Machines Corporation in the United States, other countries, or both. Cardiris is a trademark of I.R.I.S. ScanSnap and ScanSnap logo are the trademarks of FUJITSU LIMITED. ABBYY FineReader™ 8.x Engine © ABBYY Software House 2008. OCR by ABBYY Software House. All rights reserved. ABBYY FineReader are trademarks of ABBYY Software House. Other products and company names appearing in this brochure are the registered trademarks of the respective companies. All statements herein are valid only in the U.S. for U.S. residents, are based on normal operating conditions, are provided for informational purposes only, and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. Fujitsu Computer Products of America, Inc. reserves the right to modify at any time without prior notice these statements, our products, their performance specifications, availability, price and warranty, post-warranty and service programs. DS3670111