

■General Specifications

Product name		ScanSnap S1100	
Scanner type		CDF (Continuous Document Feeding), simplex sheetfed Two way paper pass (Straight path, U turned path)	
Scanning modes		Color, grayscale, monochrome, automatic (color / grayscale / monochrome detection)	
Image sensor		CIS (Contact Image Sensor) x 1	
Light source		3 Color LED (Red / Green / Blue)	
Optical resolution		600 dpi	
Scanning speed (A4 portrait) *1	USB bus powered	Auto mode (default)*2	7.5 seconds / page
		Normal mode (150 dpi)	
		Better mode (200 dpi)	
		Best mode (300 dpi)	
		Excellent mode (600 dpi)	
		35 seconds / page	
Document size		Normal mode	A4, A5, A6, B5, B6, Business card, Post card, Letter, Legal and Custom sizes (Max: 216 x 360 mm (8.5 x 14.17 in.), Min: 25.4 x 25.4 mm (1 x 1 in.)) /Automatically recognizes document size
		Normal mode with Carrier Sheet	Use of a carrier sheet permits the scanning of A3, B4, 11 x 17 in. and photographs as well as the document sizes that are listed above
		Long paper scanning*3	Max: 216 x 863 mm (8.5 x 34 in.) (300 dpi or less)
Paper weight (Thickness)		<ul style="list-style-type: none"> ● 52 to 209 g/m², or 14 to 56 lb (Straight path) ● 52 to 80 g/m², or 14 to 20 lb (U turned path) ● The card can be used. (portrait / landscape) Non-embossed: 0.76 mm or less Embossed: 0.76 + 0.48 mm (ISO7810 conforming) 	
Paper setting		Front side up	
Interface *4		USB 2.0 (USB 1.1 compatible)	
Power requirement		5 V / 0.5 A (x 1port)	
Power consumption		During operation: 2.5 W or less, During sleep mode: 1 W or less, During off mode: Less than 0.5 W	
Operation environment		Temperature: 5 to 35° C (41 to 95° F) Relative humidity: 20 to 80% (Non-condensing)	
Dimensions (W x D x H) *5		273 x 47.5 x 34 mm (10.74 x 1.87 x 1.33 in.)	
Device weight		350 g (0.77 lb)	
Environmental compliance		ENERGY STAR® / RoHS *6	
Multifeed detection		None	
Driver		<ul style="list-style-type: none"> ● ScanSnap specific driver ● Windows®: Does not support TWAIN / ISIS™ ● Mac OS: Does not support TWAIN 	

*1 Scanning speeds may vary due to the system environment used. Scanning Speed means the time from "Start feeding document" to "Finish output document" after pre-pick and pushing Scan button. In case of "From pushing Scan button", Warm-up time is added. ●Warm-up time: Less than 2 seconds from ready status (Less than 3 seconds after opening chute cover) *2 Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode". *3 The S1100 is capable of scanning documents that exceed A4 size in length. This function is available for all modes except Excellent mode. *4 PC with USB 3.0 works as USB 2.0. It is guaranteed only attached USB cable. *5 When the paper output guide is in the folded position. *6 PFI LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

■Software

	Windows®	Mac OS
Driver*1	ScanSnap Manager V5.1	ScanSnap Manager V3.2
Applications	ScanSnap Organizer V4.1	-
	CardMinder™ V4.1	-
	-	Cardiris™ 4.0 for ScanSnap
	ABBYY FineReader for ScanSnap™ 4.1	ABBYY FineReader for ScanSnap™ 4.1
	Scan to Microsoft® SharePoint® 3.4	-
Evernote for Windows 4.4	Evernote for Mac 2.2	

*1 TWAIN or ISIS™ applications cannot be used directly

■Included items

- Getting started
- Setup DVD-ROM
- USB cable (2.0 m)
- Rack2-Filer (Exclusive to S1100 with Rack2-Filer)

■Consumables

Description	Model Number	Remarks
Cleaner F1	PA03950-0352	100 ml bottle Used to clean Rollers
Cleaning Wipe	PA03950-0419	1 pack (24 sheets) Used to clean Rollers

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

©2011 ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY. Adobe, Acrobat are either registered trademarks or tradenames of Adobe Systems Incorporated in the United States and/or other countries. Cardiris is a trademark of I.R.I.S. Evernote is a registered trademark or trademark of Evernote Corporation. Google, Google Docs and Android are registered trademarks or trademarks of Google Inc. Intel, Pentium, and Intel Core are trademarks or registered trademarks of Intel Corporation in the United States and other countries. ISIS™ is a registered trademark of EMC Corporation in the United States. Mac, Mac OS, iPad, iPhone and Mac logo are trademarks of Apple Inc. Microsoft, Windows, Windows Vista, Excel, PowerPoint and SharePoint are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. Word is a product of Microsoft Corporation in the United States. PowerPC is a registered trademark or trademark of International Business Machines Corporation in the United States, other countries, or both. Salesforce and Salesforce CRM are registered trademarks or trademarks of salesforce.com which is based in the U.S. ScanSnap, ScanSnap logo, CardMinder and Rack2-Filer are the trademarks of PFI LIMITED. Other company names and product names are the trademarks or registered trademarks of the respective companies.

Visit the ScanSnap homepage for additional information : <http://scansnap.fujitsu.com/>

⚠ Safety Precautions	
Be sure to carefully read all safety precautions prior to using this product and use this device as instructed.	Do not place this device in wet or oily areas; or subject it to environments high in dust or moisture. Doing so may result in electrical shock, fire, or product damage.

■ScanSnap S1100 System Requirements

●Windows®

Compatible operating systems	Windows® 7 (32-bit/64-bit)	Windows Vista® (32-bit/64-bit)*1	Windows® XP (32-bit)*2
Driver / Applications *3	ScanSnap Manager V5.1	Supported	Supported
	ScanSnap Organizer V4.1 *4	Supported	Supported
	CardMinder™ V4.1	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported
	Scan to Microsoft® SharePoint® 3.4	Supported	Supported
Evernote for Windows 4.4	Supported	Supported	Supported
Hardware requirements *5	CPU *6	Intel® Pentium® 4 1.8 GHz or higher (recommended: Intel® Core™ 2 Duo 2.2 GHz or higher)	
	Memory capacity *6	64-bit: 2 GB or more 32-bit: 1 GB or more	512 MB or more (recommended: 1 GB or more)
	Display	800 x 600 pixels or more	
	Disk capacity *7	2,220 MB or more of free hard disk space (2,470 MB or more of free hard disk space is required for using with Rack2-Filer)	
	DVD-ROM drive	Required for installation	
USB port *6 *8	USB3.0 / USB2.0 / USB1.1		

*1 Service Pack 1 or later required. *2 Service Pack 3 or later required. *3 For the latest support information, visit the ScanSnap homepage. *4 Adobe® Acrobat® 7.0 or later (not included) is required in order to use the Adobe® Acrobat® search feature. Please check the Adobe homepage to find out which version of Acrobat is supported by the OS you are using. *5 The ScanSnap device may not work if the connected computer does not meet this requirement. *6 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *7 Microsoft .NET Framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. *8 ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

●Mac OS

Compatible operating systems	Mac OS X v10.7	Mac OS X v10.6*1	Mac OS X v10.5*2	Mac OS X v10.4*3
Driver / Applications *4	ScanSnap Manager V3.2	Supported	Supported	Supported
	Cardiris™ 4.0 for ScanSnap	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported
	Evernote for Mac 2.2	Supported	Supported	Not Supported
Hardware requirements *6	CPU *7	Intel® Core™ 2 Duo Processor (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Intel® Core™ Duo 1.83 GHz or higher (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Power PC G5 1.6 GHz or higher Intel® Core™ Duo 1.83 GHz or higher (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)
	Memory capacity *7	2 GB or more	1 GB or more	512 MB or more (recommended: 1 GB or more)
	Display	1,024 x 768 pixels or more		
	Disk capacity	1,555 MB free hard disc space for installation		
	DVD-ROM drive	Required for installation		
USB port *7	USB 2.0 / USB 1.1			

*1 Mac OS X v10.6.6 or later recommended. *2 Mac OS X v10.5.8 recommended. *3 Mac OS X v10.4.11 recommended. *4 For the latest support information, visit the ScanSnap homepage. *5 Mac OS X v10.5.8 only. *6 The ScanSnap device may not work if the connected computer does not meet this requirement. *7 Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *8 System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

■Rack2-Filer V5.0 System Requirements (Windows®)

Compatible operating systems	Windows® 7 (32-bit/64-bit)	Windows Vista® (32-bit/64-bit)	Windows® XP (32-bit)	Windows® 2000 Professional*1
Hardware requirements	CPU	Intel® Pentium® 4 1.8 GHz or higher	Intel® Pentium® III 600 MHz or higher	
	Memory capacity	64-bit: 2 GB or more 32-bit: 1 GB or more	512 MB or more (recommended: 1 GB or more)	256 MB or more (recommended: 512 MB or more)
	Display	800 x 600 pixels or more		
	Disk capacity	System drive: 10 MB or more disk space Installation drive: 450 MB or more disk space* *Additional space is required for the data created by Rack2-Filer		

*1 Service Pack4 or later

■Options

Description	Model Number	Remarks
ScanSnap S1100 Case *1	PA03610-0001	Intended for ScanSnap S1100 and included items
ScanSnap Carrier Sheets *2	PA03360-0013	5 Carrier Sheets Intended for ScanSnap S1500, S1500M, S1100, S510, S510M, S500, S500M and ScanSnap fi-5110EOX series scanners and included

*1 This product has been especially designed for storing and carrying ScanSnap S1100. Please note that this product is not guaranteed to withstand damage by excessive shock or external pressure. *2 Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, the lifespan may vary with usage. ScanSnap Carrier sheets are intended to scan paper documents with weights of 127 g/m² or less. They also support the scanning of folded documents that are as large as 216 x 297 mm.

POWERED BY ABBYY

ABBYY FineReader OCR

FineReader OCR

ABBYY™ FineReader™ Engine ©2011 ABBYY. OCR by ABBYY. ABBYY and FineReader are trademarks of ABBYY.

ENERGY STAR

Mac

Universal

PFI LIMITED, a Fujitsu company, has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a registered trademark of the United States.

ScanSnap

Color Image Scanner

S1100



Enhanced with new features

- ▶ Seamlessly sync to iPad/iPhone and Android™ devices
- ▶ Easily link to Dropbox and more from Quick Menu
- ▶ Link from an open software or cloud application with ScanSnap Folder*

*The application must support PDF and JPEG files.

Premium bundled software

- ▶ CardMinder™ (Win) & Cardiris™ (Mac)

Simple, Speedy & Compact.

From Paper to PDF in One Touch!



ScanSnap S1100

Bring simple "One Touch" scanning to new places!
Discover new levels of productivity!



One of the smallest mobile A4 scanners in the world *1

The ScanSnap S1100 document scanner pushes the limits of size for extreme portability while delivering smooth A4 size document scanning*2. All you need is your laptop and one USB cable to scan and share your documents anywhere, anytime.



*1 This statement was true as of October 1, 2010 based on comparisons of A4 document feed type scanners conducted by PFU.
*2 The S1100 measures approximately 1/4 the size and less than 1/4 the weight when compared to the ScanSnap S1300.

Scans plastic cards and other various document types*

In addition to standard paper types, the S1100 can scan plastic cards like the ones used for membership IDs.

* Card type ISO 7810, ID-1 format = 86 x 54 mm (supports embossed cards)



Continuous Document Feeding (CDF Function)

Even though the S1100 is one of the world's smallest document-feed scanners, you can smoothly scan multiple page documents with remarkable speed. The Continuous Document Feeding function allows you to insert pages one after another without any extra button pressing by detecting when a sheet enters and exits the S1100.

Scanning a two-sided document using the CDF Function



Speedy "One Touch" scanning

The S1100 delivers a snappy 7.5 seconds/page (approximately 8 ppm) scanning speed for color A4 documents at resolutions up to 300 dpi.*

* The time for scanning speed was measured from the point a page first enters to the point it fully exits the scanner.


Two selectable paper paths

Switch S1100's paper output guide to either the folded position for the straight path or the open position for the U-turn path to best suit the document you want to scan.

Straight path


Most suitable for scanning post cards, photos, business cards, plastic cards*, ScanSnap Carrier Sheet, and common office paper.

* This applies to standard ISO 7810 ID-1 card types.



U-turn path

Most suitable for scanning common office paper.



Scans to a greater range of mobile devices **NEW**

Like all scanners of the ScanSnap series, the S1100 supports wireless scanning to iPad and iPhone devices for convenient mobile viewing via the mobile app ScanSnap Connect Application, which now comes in a version for Android™ smartphones and tablets.

* To use the latest ScanSnap functions, download and apply the most recent software update.
* ScanSnap Connect Application is available as a free download from the official application distribution service of the device (e.g., Google Play and Apple App Store). The Wi-Fi of the ScanSnap installed computer must be turned on to use this feature.



Efficiently organize data from scanned business cards

Business card organizer software

CardMinder™ V4.1 [Windows®]

Cardiris™ 4.0 for ScanSnap [Mac OS]

- Scan your collection of business cards into easy to navigate digital business card holders.
- Import the data from your scanned business cards into Excel, Outlook, Address Book (Mac OS) and other database programs for fast referencing and application.



CardMinder™ V4.1



Cardiris™ 4.0 for ScanSnap

Fast and flexible application of scanned data with Quick Menu **NEW**

After scanning is complete, the Quick Menu appears. Navigate through the Quick Menu's easy to use interface to smoothly send your digitized document to an application of your choice.

* To use the latest ScanSnap functions, download and apply the most recent software update.

ScanSnap Manager V5.1 [Windows®]

ScanSnap Manager V3.2 [Mac OS]



Linking documents to the cloud made simple **NEW**

The ScanSnap series features pre-set functions for near effortless scanning to Evernote, Google Docs, Salesforce, SharePoint Online and SugarSync. The S1100 brings additional functions that help you easily scan your documents to today's cloud applications for convenient browsing from a computer or smartphone--anywhere, anytime.


Introducing ScanSnap Folder [Windows®] **NEW**

This new function replicates ScanSnap as Windows folder. By selecting this folder from the file selection screen of an application/cloud service you can directly apply your scanned documents, significantly boosting your work efficiency.

Scan to Dropbox **NEW**

The S1100 features the latest Quick Menu which includes a new function for saving scanned documents to Dropbox, one of today's leading online file syncing/storage services. With more cloud services to choose from, ScanSnap customers are sure to find the right application for their documents.

* To use the latest ScanSnap functions, download and apply the most recent software update.

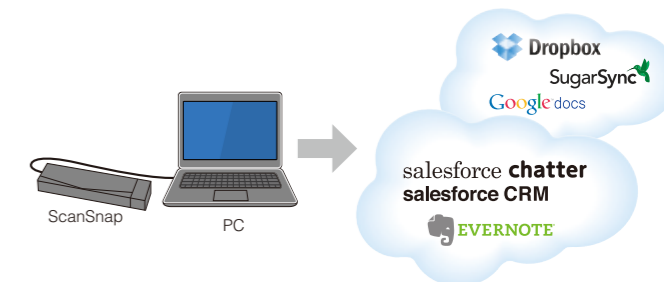

Automated features for near effortless scanning

The S1100 features a powerful set of automated image processing functions including Auto deskew, Auto orientation, and Auto color detection. These functions make pre-scan work like sorting pages and changing scan settings unnecessary, so you can scan your documents with minimal effort.

Generates Microsoft® Word, Excel®, PowerPoint® files

Top-class OCR engine

ABBYY FineReader for ScanSnap™ 4.1 [Windows®]

ABBYY FineReader for ScanSnap™ 4.1 [Mac OS]

Smoothly scan and convert paper documents into Word, Excel® and PowerPoint® documents.

* Only Microsoft® Word and Excel® are available for Mac OS.
* Generated images and text may vary from the original.

S1100 + Rack2-File V5.0 Bundle Model [Windows®]

- Directly file and organize your digitized documents in virtual binders.
- Realistic page flip interface with useful editing functions.
- A powerful tool for uniformly managing image data produced by the S1100 and other devices.



ScanSnap S1100 Case (Option)

A convenient carrying case intended for the S1100 is available. (See disclaimer under "Options" in the next page)

