FUJITSU

ScanSnap
Color Image Scanner

Changing how documents are managed

One button scanning to searchable PDF

Scan directly to Microsoft® applications

20% faster scanning speed

Business card scanning

Color Duplex 18 pages per minute!

S500

Included to work with Microsoft® Windows® Operating Systems

Adobe® **Acrobat** 7.0 Standard

ScanSnap Organizer V3.0   PDF File Arranging & Viewing Software
PFU CardMinder™ V3.0   Business Card Scanning Software

Enhance productivity with Fujitsu service and support

Features:

Scan 18 double-sided pages per minute:
In one step, the Fujitsu ScanSnap S500 scanner digitizes both sides of a document in a single pass, in color, and at an amazing speed of up to 18 pages per minute.

Advanced features for the ultimate ease of use!
With a touch of the button the ScanSnap S500 scanner enhances the user experience with a host of automatic features, including:

Auto paper size detection
Scan mixed batches of documents containing paper ranging in size from business cards to legal sized documents.

Auto de-skew
Automatically straightens and aligns text and images into their correct orientation.

Auto blank page deletion
Save storage space and eliminate the need to edit scanned documents with the ScanSnap S500's ability to recognize and delete blank pages.

Instantly create searchable PDF files:
The included "ScanSnap Organizer" automatically converts scanned data into searchable PDF files, while the ScanSnap S500's image enhancement technology increases character recognition for more precise OCR accuracy.

Scan directly to Microsoft® Office Applications:
The bundled ABBYY FineReader® enables the user to scan documents directly to applications such as Word, Excel and PowerPoint®.

Quickly organize business card information:
Scan business cards directly to your contacts database with the included CardMinder™ application. CardMinder captures information written in 7 languages from scanned business card images and stores this information in an easily accessible format.

Simple installation and operation in a compact design!
The ScanSnap S500 scanner easily installs via its USB 2.0 interface and its small footprint requires less space than a letter size piece of paper.
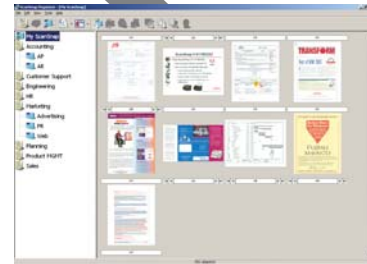
Advance Exchange maximizes uptime:
The ScanSnap S500 scanner is covered by a one-year Limited Warranty. An upgrade to the Advance Exchange program (sold separately) is also available to eligible purchasers at www.BuyFCPA.com. For full details on the Limited Warranty and on all service programs, go to www.ImagingService.com or call (800) 626-4686.

ScanSnap
Color Image Scanner

Quickly and easily digitize various document types!

A3 / B4 / A4 / B5 / A5 / B6 / A6 / card

General Technical Specifications

Product Name		ScanSnap S500
Scanner type		ADF (Automatic Document Feeder), Duplex color scanning
Output		Color/B&W/Automatic color and B&W detection
Image sensor		Color CCD x2
Optical Resolution		600dpi
Scanning Speed (A4)	Normal Mode	Color 150dpi, B&W 300dpi : 18 pages per minute/36 images per minute
	Better Mode	Color 200dpi, B&W 400dpi : 12 pages per minute/24 images per minute
	Best Mode	Color 300dpi, B&W 600dpi : 6 pages per minute/12 images per minute
	Excellent Mode	Color 600dpi, B&W 1,200dpi : 0.6 pages per minute/1.2 images per minute
Scanning Range		A4, A5, A6, B5, B6, Business card, Letter, Legal and Custom sizes (can set for up to 5 different paper types)/Automatically recognizes paper type by paper length.
		Use of Carrier Sheet permits the scanning of A3, B4, double letter and photographs as well as those listed above.
Paper Weight (Thickness)		52 to 127g/m^2 (14 to 34 lb)
Hopper Capacity		50 Sheets (20lb)
Interface		USB 2.0 (USB 1.1 Compatible)
Driver		ScanSnap Specific Driver [1] (TWAIN/ISIS® not supported)
Applications		Adobe® Acrobat® 7.0 Standard, ABBYY FineReader® for ScanSnap 2.0, CardMinder™ v3.0, ScanSnap Organizer v3.0
Compatible Operating System		WIN 98SE/2000/XP
Power Requirement		AC 100 to 240V, 50 / 60 Hz
Power Consumption		Scan mode: 28W or less, Sleep mode: less than 6W
Operation Environment	Temperature	5°C to 35°C (42°F to 95°F)
	Relative Humidity	20 to 80% (non-condensing)
Dimensions (W x D x H)		284 x 157 x 158 mm (11.2 x 6.2 x 6.2 in)
Device Weight		5.9lbs. or less, without power adapter
Environmental Compliance		ENERGY STAR® Compliant
Limited Warranty		1 year Limited Warranty. For full details, visit www.fcpa.fujitsu.com/warranties or call (800) 626-4686
Service Options		In-Warranty Upgrade - Advance Exchange. Post-Warranty - Advance Exchange Plus. ScanAid Cleaning and Consumables kit. For full details on all service programs, visit www.ImagingService.com
Part Number		PA03360-B505

[1] TWAIN or ISIS applications cannot be used directly.

Consumables

Description	Part Number	Remarks
Pad assembly	PA03360-0002	Lifetime: Every 50,000 sheets for one year.
Pick roller	PA03360-0001	Lifetime: Every 100,000 sheets for one year.
ScanAid™ Kit	CG01000-510501	Includes 2 Pad assemblies, 1 pick roller and cleaning kit

Options

Description	Part Number	Remarks
ScanSnap Carrier Sheet*	PA03360-0013	5 carrier sheets. Intended for ScanSnap S500 and ScanSnap fi-5110EOX series scanners
ScanSnap Bag	PA03951-0651	Intended for ScanSnap S500 and fi-5110EOX series scanners and included items.

*Although ScanSnap Carrier Sheets have a listed lifespan of 500 scans, life spans may vary. ScanSnap Carrier Sheets are used to scan documents containing paper that weighs less than 127g/m^2 as well as folded documents as large as 216mm x 297mm.

System Requirements

		Windows® 98	Windows® 98 Second Ed.	Windows® Me	Windows® 2000 Professional	Windows® XP
Compatible Operating Systems	ScanSnap Manager V4.0	Supported	Supported	Supported	Supported	Supported
	ScanSnap Organizer V3.0	Supported	Supported	Supported	Supported	Supported
	CardMinder™ V3.0	Supported	Supported	Supported	Supported	Supported
	Adobe® Acrobat® 7.0 Standard[2]	Not Supported	Not Supported	Not Supported	Supported[1]	Supported[1]
	ABBYY FineReader for ScanSnap™ 2.0	Supported	Supported	Supported	Supported	Supported
Hardware Requirements[4]	CPU	Intel® Pentium®III 600MHz or higher (Intel® Pentium® 4 1.8GHz or higher recommended)				
	Memory Capacity[3]	128MB or higher (256MB or higher recommended)				
	Optical Resolution	800 x 600 dots or higher				
	Disk Capacity	Spare capacity of at least 1,080MB is necessary to install the software that is included in this chart[5]				
	CD-ROM Drive	Required for installation				
	USB port	USB2.0/USB1.1				

[1] Compatible with Windows®2000 Professional (Service Pack 2 or higher) and Windows® XP Professional/Home Edition.
[2] Requires Microsoft® Internet Explorer 5.5 or higher.
[3] A memory capacity of 512MB or higher is recommended when scanning in "Excellent mode".
[4] Scanning speeds may drop if recommended CPU, memory capacity and USB1.1 requirements are not met.
[5] Installing Adobe® Acrobat® 7.0 Standard in addition to the other software included with this scanner will require additional 300MB in File Cache memory.

ENERGY STAR • HI-SPEED CERTIFIED USB • POWERED BY ABBYY FineReader OCR • Advance EXCHANGE • ScanAid

http://scansnap.fujitsu.com

Fujitsu Computer Products of America, Inc.
http://us.fujitsu.com/fcpa
1255 East Arques Avenue, Sunnyvale, CA 94085-4701
Telephone: (800) 626-4686 (408) 746-7000 info@fcpa.fujitsu.com

FUJITSU
THE POSSIBILITIES ARE INFINITE