






ScanSnap S1500

Compact Color Duplex Scanner
for Microsoft® Windows®

-  One button searchable PDF creation
-  Intelligent paper feed detection
-  Blazing 20ppm color scanning
-  50-page Automatic Document Feeder (ADF)
-  Comes with Adobe® Acrobat® X Standard




Easily transform paper with the touch of one button


Organizing with the ScanSnap S1500 happens at the touch of a single button. All this intelligent technology working behind the scene ensures your PDF or JPEG files look their best automatically.



Blank Page Detection

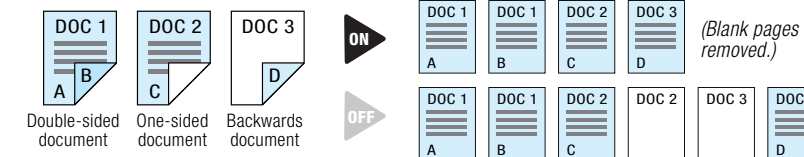


Intelligent Auto Color Detection

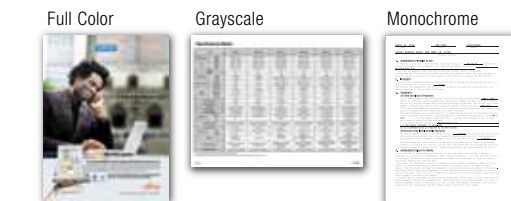


If the ScanSnap detects color, grayscale or monochrome it scans accordingly keeping file sizes to a minimum.

Automatic Resolution Function

Assures small documents are readable.



Auto-Size Detection

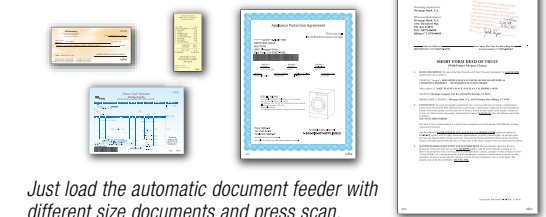

Just load the automatic document feeder with different size documents and press scan.

Auto Deskew and Auto Orientation




Smaller footprint than an A4 notebook computer

ScanSnap complements any setting, whether resting elegantly on the desk at home or serving dutifully in the corporate office.

Fast scanning

Simply load a stack of documents into the automatic document feeder and press the "Scan" button. Capable of holding up to 50 pages in the feeder, ScanSnap S1500 scans both sides simultaneously at a speed of up to 20 pages per minute.




Scan business cards to large A3 documents




ScanSnap Carrier Sheets

The included carrier sheet allows ScanSnap S1500 the flexibility to digitize large double-letter size documents (A3/B4), photographs, as well as magazine and newspaper clippings. Carrier sheets can be scanned in succession or mixed in with paper documents.



Intelligent Paper Feed Detection

ScanSnap S1500 is equipped with an ultrasonic multi-feed sensor to ensure documents are scanned as intended and data is not lost.



The ScanSnap S1500 provides Windows® users an effective way to greatly reduce paper clutter, storage space, and security risk associated with unmanaged paperwork at home or office. Even better, documents

scanned by ScanSnap take on a higher level of accessibility and usefulness once liberated into the digital realm. Find out how others are freeing up time, space and even money. Visit <http://us.fujitsu.com/scansnap>.

You can scan practically anything.

Automatic features make ScanSnap the quickest and easiest to use scanner ever.



Reduce paper clutter and make documents more useful and secure.

NEW Link ScanSnap to iPad & iPhone devices

Scan content – papers, photos, magazine clippings and more – directly to your iPad/iPhone device for viewing on the go using the ScanSnap Connect Application, free from the Apple App Store.

- The ScanSnap connected PC must be running Windows® 2000 Professional or later.
- This application must be installed on iPad/iPhone devices running iOS 4.2.1 or later.
- Only one iPad/iPhone device at a time can sync to the ScanSnap connected PC.

Now Better armed for the cloud era

Like all current ScanSnap models, the S1500 can link to cloud services Evernote, Google Docs™ and Salesforce CRM.

Plus two additional cloud syncing functions:

NEW Scan to Salesforce Chatter

Scan various documents to the online collaboration tool Salesforce Chatter (business cards to Salesforce CRM) and see data sharing, communication and productivity in your business soar.

NEW Scan to SugarSync


Stay connected to all your documents anywhere you go by scanning them to SugarSync, one of today's premier online backup services.

<http://us.fujitsu.com/scansnap>

Quick Menu provides ad-hoc flexibility

Operators can quickly access all the powerful features of ScanSnap from the centralized Quick Menu. Just scan and choose a function to quickly transition from one scanning intention to another. *Quick Menu for Windows® shown

ScanSnap Quick Menu

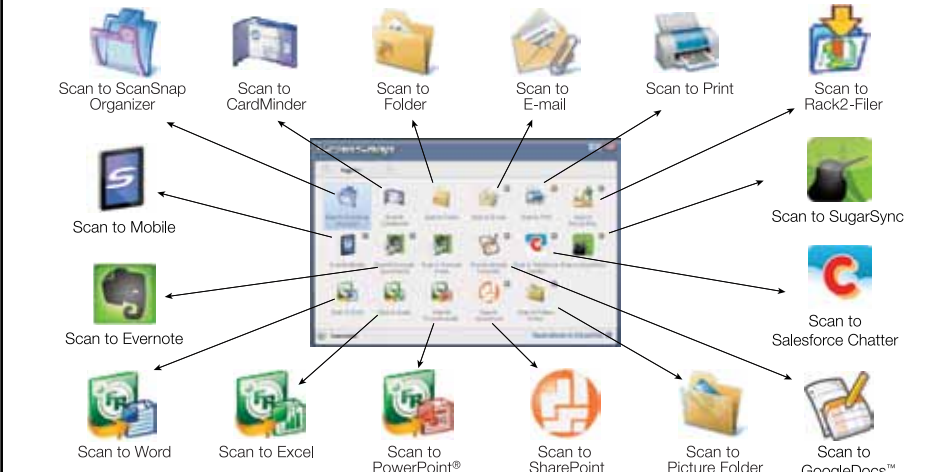

Bundled Software



ScanSnap Organizer V4.0



CardMinder V4.0



Adobe® Acrobat® 10 Standard



Rack2-File V5.0 (Trial only)

- **ScanSnap Organizer organizes and manages scanned documents**
- Users can store, manage, and view PDF and JPEG files created by ScanSnap.
- **Searchable PDF:** Perform post-scan OCR on documents scanned by ScanSnap S1500 immediately or when computer is idle.
- **Keywords:** Add and search on keywords from PDFs created by ScanSnap S1500.



- **Intelligent Cropping:** ScanSnap S1500 can automatically crop out sections outlined with a standard highlighter pen.
- **Intelligent Indexing:** Add keywords to a PDF automatically by highlighting text on documents before scanning.

- **CardMinder™ efficiently organizes business card information**
- ScanSnap S1500 quickly scans business cards, captures both sides simultaneously, extracts the contact information, and places it into an editable database.
- CardMinder can recognize several different languages and provides export to Outlook Express, Excel, and other contact managers.

- **ABBYY FineReader for ScanSnap™ 4.0 creates Microsoft® Word, Excel®, and PowerPoint® files**

With ScanSnap S1500, users can create editable documents by scanning directly into Word, Excel, and PowerPoint. *Generated images and text may vary from the original.

- **Adobe® Acrobat® X Standard creates Searchable and Editable PDF files**
- With Adobe® Acrobat® X Standard, users can move beyond merely "seeing" and "printing" PDF documents to searching and editing them however they like.
- Adobe® Acrobat® X Standard supports password protection and digital ID creation, ideal for safeguarding personal and confidential information on PDF files.

- **Rack2-File V5.0 available with ScanSnap S1500 Deluxe Bundle**

- Feature-rich scanning and digital archiving application.
- Allows content to be scanned directly into Rack2-File from ScanSnap.
- Virtual desk (Work Area) allows users to organize and disseminate scanned files quickly and efficiently.
- Ultra-intuitive user interface incorporates realistic looking binders and cabinets.
- Easy-Flip technology allows users to interact with their scanned content with complete ease.

*Full license provided with ScanSnap S1500 Deluxe Bundled Model only (PN: PA03586-B015)

General Technical Specifications

Product Name / Part Number	ScanSnap S1500 / PA03586-B005	
Scanner Type	Automatic Document Feeder (ADF), Duplex Scanning	
Scanning Modes	Color, Grayscale, Monochrome, Automatic (color / grayscale / monochrome Detection)	
Image Sensor	CCD (Charge coupled device) x 2 (front / back)	
Light Source	White cold cathode discharge lamp	
Optical Resolution	600 x 600 dots per inch (dpi)	
Scanning Speed ¹ (A4 portrait)	Auto Mode ²	Simplex or Duplex, 20 pages per minute (ppm)
	Normal Mode	Color & Grayscale 150 dpi, Monochrome 300 dpi, Simplex/Duplex, 20 ppm
	Better Mode	Color & Grayscale 200 dpi, Monochrome 400 dpi, Simplex/Duplex, 20 ppm
	Best Mode	Color & Grayscale 300 dpi, Monochrome 600 dpi, Simplex/Duplex, 20 ppm
	Excellent Mode ³	Color & Grayscale 600 dpi, Monochrome 1200 dpi, Simplex/Duplex, 5 ppm
Document size	Normal Mode without Carrier Sheet	A4, A5, A6, B5, B6, Business Card, Letter, Legal and Custom Size. Max: 8.5 X 14.17 in. (216 X 360 mm), Min: 2 X 2 in. (50.8 X 50.8 mm). Automatically recognizes document size.
	Normal Mode with Carrier Sheet	Use of a Carrier Sheet permits the scanning of A3, B4, Double-Letter and photographs as well as the document sizes listed above.
	Long Paper Scanning ⁴	34 inches in length (863 mm)
Multi-feed Detection	Ultrasonic Sensor or Length Detection (selectable)	
Paper Weight (Thickness)	14 to 34 lb (52 to 127 g/m ²)	
Paper Chute Capacity ⁵	Maximum 50 sheets (Letter size at 20 lb or 80 g/m ²)	
Interface	USB 2.0 (USB 1.1 Compatible)	
Power Requirement	AC 100V to 240V, 50 / 60 Hz	
Power Consumption	Operating Mode	35W or less
	Standby Mode	Less than 4.5W
Operation Environment	Temperature	41°F to 95°F (5°C to 35°C)
	Relative Humidity	20% to 80% (Non-condensing)
Dimensions (W x D x H) ⁶	11.5 x 6.3 x 6.2 in. (292 x 159 x 158 mm)	
Device Weight	6.62 lb (3.0 kg)	
Environmental Compliance	ENERGY STAR [®] Compliant / RoHS ⁷	
Limited Warranty	1 Year Limited Warranty. For full details, visit www.fcpa.fujitsu.com/warranties or call (800) 626-4686	
Service Options	In-warranty Upgrade: Advance Exchange. Post-Warranty: Advance Exchange Plus, Depot Plus, ScanAid Kit, Cleaning and Consumable Kit. For full details on all service programs, visit www.ImagingService.com	

1: Scanning speeds may vary due to the system environment used. 2: Documents measuring 5.8 inches (148 mm) in length or less are scanned in "Best Mode", while other documents are scanned in "Better Mode". 3: Excellent 1200 dpi resolution for Black & White provided by interpolation. 4: ScanSnap S1500 is capable of scanning documents that exceed A4 size in length. ScanSnap S1500 supports the scanning of longer documents in all modes except in "Excellent Mode". 5: Maximum capacity varies depending upon paper weight. 6: Excluding the stacker and other external attachments. 7: PFI limited, a Fujitsu company, has determined that this product meets RoHS requirements (2002/95/EC).

Software	Windows®	Mac OS
Driver ^{8,9}	ScanSnap Manager V5.1	ScanSnap Manager V3.2
Applications	ScanSnap Organizer V4.1	—
	CardMinder™ V4.1	—
	—	Cardiris™ V4.0 for ScanSnap
	Adobe® Acrobat® X Standard	—
	ABBYY Fine Reader for ScanSnap™ 4.1	ABBYY Fine Reader for ScanSnap™ 4.1
	Scan to Microsoft® SharePoint® 3.4	—
Evernote for Win 4.4	Evernote for Mac 2.2	—

8: Twain or ISS applications cannot be used directly. 9: "one touch" image file JPEG, PDF and searchable PDF) generation. These functions are operable with ScanSnap Manager 5.0 (ScanSnap specific driver).

Included items

- 1 USB cable (2.0)
- 1 ScanSnap CarrierSheet
- 1 Safety Precautions
- 1 AC adapter
- 1 Adobe Acrobat DVD-ROM
- 1 Set-up DVD-ROM
- 1 AC cable
- 1 Getting Started
- 1 Rack2-Filter (available only with bundled version)

Consumables

Description	Part Number	Remarks
Pad Assy	PA03586-0002	Lifetime: Every 50,000 sheets or one year. (For S1500 and S1500M only)
Pick Roller	PA03586-0001	Lifetime: Every 100,000 sheets or one year. (For S1500 and S1500M only)
Cleaner F1	PA03950-0352	100 ml bottle. (Used to clean Pad Assy and Pick roller)
Cleaning Wipe	PA03950-0419	1 package contains 24 sheets. (Used to clean Pad Assy and Pick roller)

* These recommended lifetimes are for 20 lb (80 g/m²) A4 sized documents. Therefore, appropriate replacement lifetimes may vary from other document types

Safety Precautions

Be sure to carefully read all safety precautions prior to using this product and use this device as described.
Do not place this device in wet, moist, steamy, dusty or oily areas. Using this product under such conditions may result in electrical shock, fire or damage to the product.

This scanner is designed to digitize materials that can be reproduced lawfully, in accordance with applicable copyright regulations and other laws. ScanSnap users are responsible for how they use this scanner. It is imperative that ScanSnap users comply with all applicable local rules and laws, including, without limitation, copyright laws when using this scanner.

Fujitsu Computer Products of America, Inc. 1250 East Arques Avenue Sunnyvale, CA 94085-4701
(800) 626-4686 (408) 746-7000 • info@fcpa.fujitsu.com • <http://us.fujitsu.com/fcpa>



©2011 Fujitsu Computer Products of America, Inc. All rights reserved. Fujitsu and the Fujitsu logo are registered trademarks or trademarks of Fujitsu Limited. Adobe and Acrobat are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States and/or other countries. Microsoft, SharePoint, Windows and Vista are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries. ISS is a registered trademark of Pixel Translations, a division of Captiva Software Corporation. VRS is a registered trademark of Kofax Image Products, Inc. ABBYY, FineReader are trademarks of ABBYY Software House. As an ENERGY STAR® Partner, Fujitsu Ltd. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR® is a U.S. registered trademark. All other trademarks are the property of their respective owners. All statements herein are valid only in the U.S. For U.S. residents, are based on normal operating conditions, are provided for informational purposes only, and are not intended to create any implied warranty of merchantability or fitness for a particular purpose. Fujitsu Computer Products of America, Inc. reserves the right to modify at any time without prior notice these statements, our products, their performance specifications, availability, price and warranty, post-warranty and service programs. Printed in the U.S.A. Qty. 3M DS38601111

Windows®

Driver/ Application ^{10,13}	Description	Windows® 7 (32-bit / 64-bit)	Windows® Vista™ (32-bit / 64-bit)	Windows® XP (32-bit)	Windows® 2000 Professional
ScanSnap Manager V5.1	ScanSnap Manager V5.1	Supported	Supported	Supported ¹⁴	Supported ¹⁵
	ScanSnap Organizer V4.1 ¹¹	Supported	Supported	Supported ¹⁴	Supported ¹⁵
	CardMinder™ V4.1	Supported	Supported	Supported ¹⁴	Supported ¹⁵
	Adobe® Acrobat® X Standard ¹²	Supported	Supported	Supported ¹⁴	Supported ¹⁵
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported ¹⁴	Supported ¹⁵
	Evernote for Win 4.4	Supported	Supported	Supported ¹⁴	Not Supported
Hardware Requirements	CPU ¹⁶	Intel® Pentium® 4 1.8 GHz or higher (recommended: Intel Core 2 Duo 2.2 GHz or higher)			
	Memory Capacity ¹⁶	64-bit: 2 GB or more. 32-bit: 1 GB or more	512 MB or more (recommended 1 GB or more)		
	Display	800 x 600 Pixels or more			
	Disk Capacity ¹⁷	2,220 MB free hard disc space for installation			
	DVD-ROM Drive	Required for installation			
USB Port ^{16,18}	USB 3.0 / USB 2.0 / USB 1.1				

10: This product supports Microsoft® Windows®. 11: The Windows® Desktop search function supports Windows® 7, Windows Vista® and Windows® XP. Search functionality for Windows® 2000 Professional is only supported by Adobe® Acrobat® 7.0 and Adobe Acrobat® 8. 12: Requires Microsoft® Internet Explorer 7.5 or later, or Firefox 3.5 or later. 13: Please refer to the ScanSnap Website for latest support information. 14: For use with Service pack 2 or higher. Compatible with Windows® XP Professional / Home Edition. 15: For use with Service Pack 4 or higher. 16: Scanning speed may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. 17: Microsoft .NET framework 3.5 SP1 will be installed (requires 500 MB of disk space) together with either ScanSnap Manager or ScanSnap Organizer for systems that do not have .NET Framework 3.5 SP1 installed. 18: ScanSnap operates on both USB 2.0 and USB 3.0 without any difference in performance. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Mac OS

Driver/ Application ^{22,23}	Description	Mac OS X v10.7	Mac OS X v10.6 ¹⁹	Mac OS X v10.5 ²⁰	Mac OS X v10.4 ²¹
ScanSnap Manager V3.2	ScanSnap Manager V3.2	Supported	Supported	Supported	Supported
	Cardiris V4.0 For ScanSnap	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Evernote for Mac 2.2	Supported	Supported	Supported ²⁴	Not Supported
Hardware Requirements	CPU ²⁵	Intel Core 2 Duo (recommended: Intel Core 2 Duo 2.1 GHz or higher)	Intel Core Duo 1.83 GHz or higher (recommended: Intel Core 2 Duo 2.1 GHz or higher)	• PowerPC G5 1.65 GHz or higher • Intel Core Duo 1.83 GHz or higher (recommended: Intel Core 2 Duo 2.4 GHz or higher)	
	Memory Capacity ²⁵	2 GB or more	1 GB or more	512 MB or more (recommended: 1 GB or more)	
	Display	1,024 x 768 pixels or more			
	Disk Capacity	3,095 MB free hard disc for installation			
	DVD-ROM Drive	Required for installation			
USB Port ²⁵	USB 2.0 / USB 1.1				

19: Mac OS X v10.6.6 or later recommended. 20: Mac OS X v10.5.8 recommended. 21: Mac OS X v10.4.11 recommended. 22: This product supports Mac operating system. 23: Please refer to the ScanSnap Website for latest support information. 24: Mac OS X 10.5.8 only. 25: Scanning speed may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met. *System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

Rack2-Filter^{26,27} System Requirements

Compatible Operating Systems	Windows® 2000 Professional	Windows® XP	Windows® Vista™ (32-bit & 64-bit)	Windows® 7 (32-bit & 64-bit)
CPU	Intel® Pentium® 4, 1.8GHz or higher			
Memory Capacity ¹⁶	256 MB or more (recommended: 512 MB or more)	512 MB or more (recommended: 1 GB or more)		64bit: 2GB or more 32bit: 1GB or more
Display	800 x 600 pixels or more			
Disk Capacity	System drive: 10MB or more disk space. Installation drive: 450MB or more disk space.* *Additional space is required for the data created by Rack2-Filter			

26: This product only supports Microsoft® Windows®. 27: Please refer to the ScanSnap Website for the latest support information.

Options

Description	Part Number	Remarks
ScanSnap Carrier Sheets ²⁸	PA03360-0013	5 Carrier Sheets. Intended for ScanSnap S1500M S1500, S510M, S510, S500M, S500 and ScanSnap Fi-5110E0X Series Scanner.
ScanSnap Bag	PA03951-0651	Intended for ScanSnap S1500M, S1500, S510, S510, S500M, S500 and ScanSnap Fi-5110E0X series scanner and included items.

28: Although the ScanSnap Carrier Sheet has a listed lifespan of 500 scans, the lifespan may vary with usage. Scan Snap Carrier sheets are intended to scan paper documents with weight of .027 lb. (127 g/m²) or less. The ScanSnap Carrier Sheet also supports the scanning of folded documents that are larger as 8.5 x 11.69 mm.

