

# FUJITSU Components 3rd Party Touch Panels PCAP-S series

Fujitsu 3rd Party Projected Capacitive Touch Panels


## Overview

The projected capacitive touch panels (PCAP-S series) feature a film sensor with a top cover glass and are available in sizes from 7"W to 31.5". Basic features are 85% Transmissivity with 1% Haze, 2-finger gesture operation (10-finger detection), and Operating Life of 10 Million touches. A Chip-on-Film (COF) controller IC with USB Interface is standard, with a 1mm pitch FFC connection.

This series is suitable for a wide variety of applications including industrial, Instrumentation and medical products.

While the standard sizes shown fit many applications, the cover glass is often required to be customized to meet product design requirements, so we offer cover glass customization, as well as full custom sizing design service.

The PCAP-S series is manufactured by Transtouch Technology, Inc., a Fujitsu partner company.

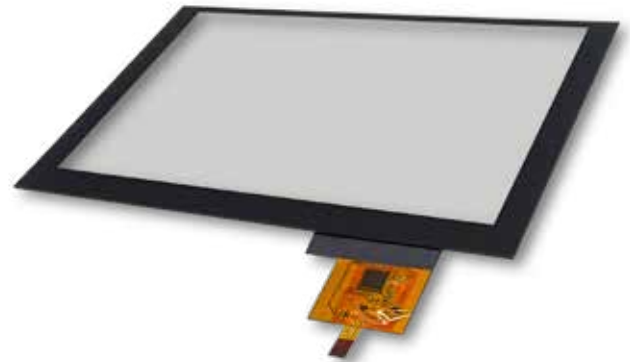

## Standard Features

- Glass-Film-Film structure
- Chip-on-Film (CoF) Flex Tail
- Major OS driver support
- Standard interface: USB
- Standard glass finish: Clear (glossy)
- RoHS compliant

## Optional Features

- Custom Cover Glass
- Flex only optional
- Graphic Border / Logo
- Strengthened Glass
- Anti-Glare (AG) & Anti-Smudge (AS)
- Controller IC upgrade
- Full Custom Designs available
- Active Pen support available

■ Part Numbers

Diagonal (inches)	Part numbers	Glass thickness (mm)	Tail (Flex) length (mm)	Transparent area (mm)	Sensor active area (mm)	USB signal type
31.5	T010-3101-T323	1.8	82.8 *	701.40 x 395.85	702.40 x 396.58	--
21.5	T010-3101-T290U	1.8	70.0	480.80 x 271.30	481.80 x 272.30	B
18.5	T010-3101-T280U	1.8	70.0	410.80 x 231.40	411.80 x 232.40	B
15.6	T010-3201-T661U	1.8	70.0	345.16 x 194.59	346.16 x 195.59	D
15.6	T010-3201-T663U	1.8	70.0	345.16 x 194.59	346.16 x 195.59	B
15	T010-3201-T651U	1.8	70.0	309.20 x 234.23	310.20 x 235.23	B
12.1	T010-3201-T580U	1.8	69.8	256.92 x 165.20	248.50 x 187.00	B
12.1	T010-3201-T582U	1.8	69.8	256.92 x 165.20	248.50 x 187.00	B
12.1W	T010-3201-T560U	1.1	100.0	247.50 x 186.00	257.92 x 166.20	D
12.1W	T010-3202-T290U	1.1	100.0	247.50 x 186.00	257.92 x 166.20	B
10.4	T010-3201-T592U	1.1	70.0	213.20 x 160.40	214.20 x 161.40	B
10.1	T010-3201-T513U	1.1	72.0	218.00 x 136.60	219.64 x 138.14	C
10.1	T010-3202-T100U	1.1	55.3	218.00 x 136.60	218.96 x 137.60	B
7	T010-3301-T207U	1.1	63.0	153.85 x 92.87	154.30 x 93.37	A

\* Requires separate controller board.

■ Interfaces


Pin order	USB signal type			
	A	B	C	D
Pin 01	VDD	GND	GND	VDD
Pin 02	D-	D-	RST	D+
Pin 03	D+	D+	VDD	D-
Pin 04	GND	VDD	D-	INT
Pin 05	RST	NC	D+	RST
Pin 06	INT	RST	NC	GND

Our COF FPC has a 1mm pitch design, except 7" panel which is 0.5mm.

■ Specifications

Please contact our sales office for specification drawings.

■ Flex Tail Detail (example)

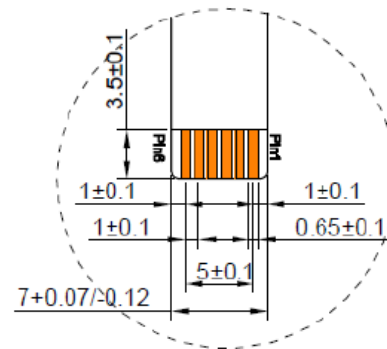

Contact

**North and South America**  
 FUJITSU COMPONENTS AMERICA, INC.  
 2290 North First Street, Suite 212  
 San Jose, CA 95131 U.S.A.  
 Tel: (1-408) 745-4900  
 Fax: (1-408) 745-4970  
 Email: components@us.fujitsu.com  
 Web: http://us.fujitsu.com/components/

**Asia Pacific**  
 FUJITSU COMPONENTS ASIA, Ltd.  
 102E Pasir Panjang Road  
 #01-01 Citilink Warehouse Complex,  
 Singapore 118529  
 Tel: (65) 6375-8560 / Fax: (65) 6273-3021  
 Email: fcal@fcal.fujitsu.com  
 www.fujitsu.com/sg/products/devices/components/

**Europe**  
 FUJITSU COMPONENTS EUROPE B.V.  
 Diamantlaan 25  
 2132 WV Hoofddorp  
 Netherlands  
 Tel: (31-23) 5560910 / Fax: (31-23) 5560950  
 Email: info@fceu.fujitsu.com  
 Web: emea.fujitsu.com/components/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2019 Fujitsu Components America, Inc. All rights reserved. Revised May 7, 2019.