

FUJITSU Cash Handling Component G510

Bill Dispensing Unit for Global Market



Large capacity with steady operation

The FUJITSU G510 is a large capacity bill dispensing unit for global markets with high speed and reliability. The FUJITSU G510 is expandable up to 4 cassette configuration and can hold a maximum 12,000 bills. This is an ideal where high volume of transactions are required. It is equipped with a reject box that stores reject bills and retrieval bills separately and makes withdrawal operation easier and less frequent.

Satisfy multiple applications

The FUJITSU G510 supports various international bills with easy adjustment and satisfies any needs of a great number of applications.

Fujitsu for you

The FUJITSU G510 will help your customers to succeed. Now, make Fujitsu a part of your team.

Main features

■ Advanced technology & high performance

- High-speed and steady bill handling accomplished by advanced bills transport mechanism
- Expandable up to 4 cassettes to hold as many as 12,000 bills
- Maximum 100 bills bunch dispensing or retrieval per transaction
- High security supported by bill retrieval function and lockable cassettes (option)

■ Flexible & easy integration


- Easily adjustable cassette supporting various international bills and other media
- Applicable with CEN/XFS interface and easy integration with other devices
- Simple integration with easily accessible mounting brackets

■ Easy operability & maintenance

- Easy bill jam clearance by accessing all the transportation paths
- Less frequent replenishment or withdrawal operation realized by large capacity cassettes/reject box
- Advanced local and remote diagnostics help prevent problems in advance

G510 Bill Dispensing Unit

All measurements are in millimeters.

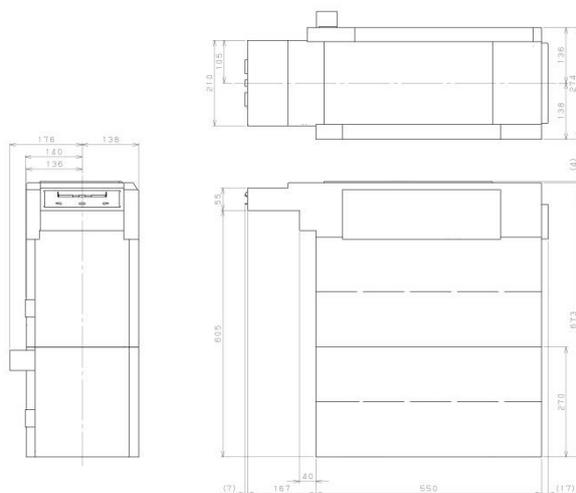

Rear access 4 cassettes configuration

Specifications

Dimensions(W x D x H)	Front access : 280mm x 734mm 550mm (2 cassettes) Rear access : 280mm x 734mm 412mm (2 cassettes)
Weight (W/O media)	Front access : Approx. 40kg (2 cassettes) Rear access : Approx. 35kg (2 cassettes)
Service Access	Front or Rear access
Bunch Bill Capacity	100 bills / transaction
Dispensing Speed	Approx. 7 bills /second* <i>*It depends on the size and condition of notes.</i>
Number of Cassettes	Up to 4 cassettes (2 cassettes standard) 1 reject bin
Acceptable Media Range	Long edge : 120mm - 166mm Short edge : 60mm - 82mm Thickness : 0.09mm - 0.15mm
Capacities / denominations	Accommodation 360mm Approx. 3,000 bills /cassette (Thickness 0.11 mm, brand-new notes)
Reject Box capacity	Reject area : Approx. 100 bills Retrieval area: Approx. 100 bills
CEN/XFS Service Providers	CEN/XFS 3.1 compatible
Interface	RS232C
Electrical Power Requirements	DC +24V ±10% Peak. 10A, Ave. 4A
Temperature	Operation 0 - 40°C Stop State -5 - 50°C
Relative Humidity	Operation 10 - 85%RH Stop State 8 - 95%RH

Note1. Above specifications may be changed without prior notice.

Note2. You may need to check beforehand whether the cash handling machine can handle your banknotes (including polymer banknotes) even if they are within the specified media range.

Contact

FUJITSU FRONTECH LIMITED

Global Business Group

1776 Yanokuchi, Inagi-shi, Tokyo 206-8555, Japan

URL: <http://www.fujitsu.com/jp/group/frontech/en/>

Inquiry: <http://www.fujitsu.com/jp/group/frontech/en/contact/>