

THE POSSIBILITIES ARE INFINITE

FUJITSU

A3 COLOR
DUPLIX
DOCUMENT
SCANNER

fi-5650C


Image Scanner

A3 Scanning



- A3
- ADF
- Straight Path
- DUPLIX
- COLOR
- Ultrasonic Multi Feed Detection Sensor
- Ultra SCSI
- USB 2.0/1.1
- Mono. 110 A4 ipm
- Color 110 A4 ipm
- 600 dpi

- Win 95
- Win98SE
- Win Me
- WinNT4,0
- Win 2000 Professional
- Win XP

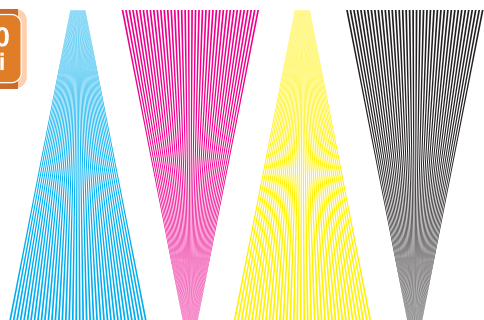

Adobe® Bundled!
Acrobat® 6.0
Standard

● Convert any document to a PDF file

for Microsoft® Windows®
Operation Systems



● FUJITSU TWAIN Driver

POWERED BY



PIXEL TRANSLATIONS

● Genuine Pixel Translations ISIS driver



As an ENERGYSTAR® Partner, Fujitsu has determined that this product meets the ENERGYSTAR® guidelines for energy efficiency. ENERGYSTAR is a U.S. registered mark.

QUALITY SCANNER



TECHNICAL SPECIFICATIONS

The fi-5650C image scanner with dual interface capability (Ultra SCSI and USB 2.0) expands the market for production scanning. These features will insure Fujitsu's customers' productivity well into the future.

- High speed scanning at high resolutions and superior image quality
 - 30ppm A4/LT Landscape at 600dpi
 - 55ppm/110ipm A4 Portrait at 300dpi
- Superior paper handling
 - 200-page ADF capacity
 - Ultrasonic Method Multi Feed Detection
 - De-skew & Auto-cropping (TWAIN & ISIS Driver)
 - Straight paper path and easy maintenance
- Excellent Image quality
 - Optical resolution 600dpi
 - Image Processing Software (Option)
- Ease of placement
 - Closable operating panels located on left and right side of unit
 - Permit unit to be placed against a wall or in a corner without affecting operability



- Imprinter(Option)
 - Imprinter simplifies document management by permitting document names or codes to be printed on scanned documents



Scanner Type		ADF (Automatic Document Feeder)	
Image Sensor Type		Color CCD (Charge-coupled device) x 2	
Light Source		White cold cathode discharge lamp	
Optical Resolution		600 dpi x 600 dpi	
Output Resolution	Color	50 - 600 dpi	
	Grayscale	50 - 600 dpi	
	Monochrome	50 - 600 dpi	
AD Converter		1024 levels	
Gray Scale Level	Color	24 bit / pixel	
	Grayscale	8 bit / pixel	
	Monochrome	1 bit / pixel	
Scanning speed (A4 portrait)	Color	200 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
		300 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
	Monochrome	200 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
		300 dpi	55 ppm (Simplex) / 110 ipm (Duplex)
Document Size	Minimum	A8 (53 x 74 mm)	
	Maximum	A3 (297 x 420 mm) or 11 in x 17 in (279.4 x 431.8 mm)	
Document Weight (Thickness)		A4 size or smaller: 41 to 203 g/m ² , or 11 to 54 lb A4 size or larger: 52 to 203 g/m ² , or 13.9 to 54 lb	
Capacity		Chute: Maximum 200 sheets at A4, 20 lb, or 80 g/m ² Stacker: Maximum 300 sheets at A4, 20 lb, or 80 g/m ²	
Interface		Ultra SCSI (Half-pitch 50 pin) x 1, USB 2.0 x 1 *Also works with USB 1.1	
Connecter shape		Shield type 50 pin (pin type 50 pin);USB (B type)	
Image Processing		Error diffusion, Dither (Standard)	
Voltage or Voltage Range		AC 100 to 240 V, +10 % / -10 %	
Power		Operating: 216 W Sleep mode: Less than 6 W	
Operation environment	Temperature	Temperature: 5 to 35 Degree C (42 to 95 Degree F)	
	Relative humidity	Relative humidity: 20 to 80 % (Non-condensing)	
Dimensions	Width	639 mm (25.6 in)	
	Depth	428 mm (17.1 in)	
	Height	296 mm (11.7 in)	
Weight		17 kg (37 lb)	
Others	Multi feed detection	Yes (Standard) Ultrasonic Method Multi Feed Detection sensor	
	Long paper scanning	863 mm(34 in), Binary/Grayscale/Color	
	Paper counter	Yes	

Consumables

Pick roller	PA03338 - K011	Lifetime: Every 250,000 sheets or one year
Brake roller	PA03338 - K010	Lifetime: Every 250,000 sheets or one year

Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries. ISIS, QuickScan and their respective logos are trademarks or registered trademarks of Pixel Translations, a division of Captiva Software Corporation. Adobe, Adobe logo and Acrobat are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries. Other product names are the trademarks or registered trademarks of the respective companies. Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition August 2004

Japan contact

PFU LIMITED
International Sales Dept., Image Business Division,
Products Group
Solid Square East Tower, 580 Horikawa-cho, Saiwai-ku,
Kawasaki-city, Kanagawa 212-8563, Japan
Phone: (81-44) 540-4658 Fax: (81-44) 540-4639
<http://imagescanner.fujitsu.com/>

XXXXXXXX contact

FUJITSU x x x x x x
x x x x x x x x x x x x
x x x x x x x x x x x x
x x x x x x x x x x x x
x x x x x x x x x x x x
Phone: (1-23) 456-7890 Fax: 123-456
<http://www.x x x x .com/>

